

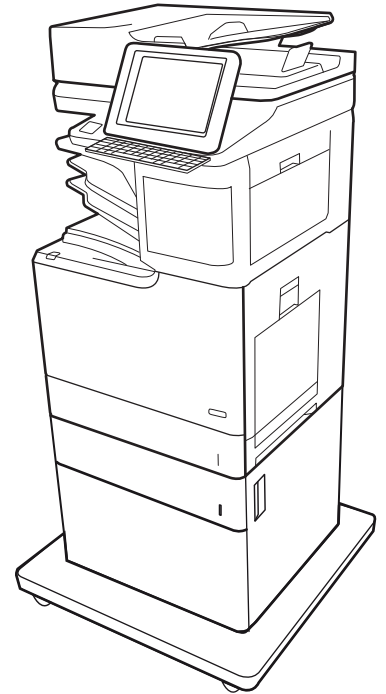


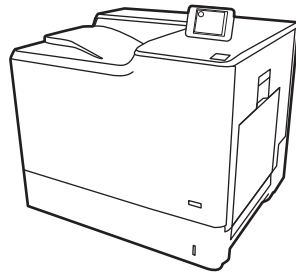

HP Color LaserJet Enterprise M652, M653
HP Color LaserJet Managed E65050, E65060
HP Color LaserJet Managed E65150, E65160
HP Color LaserJet Enterprise MFP M681, M682
HP Color LaserJet Managed MFP E67550, E67560
HP Color LaserJet Managed MFP E67650, E67660

Service manual: Troubleshooting

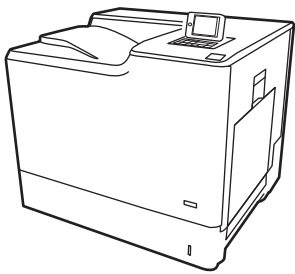

www.hp.com/videos/LaserJet
www.hp.com/support/colorlj652
www.hp.com/support/colorlj653
www.hp.com/support/ljE65050
www.hp.com/support/ljE65060
www.hp.com/support/colorljE65150
www.hp.com/support/colorljE65160

www.hp.com/support/colorljM681MFP
www.hp.com/support/colorljM682MFP
www.hp.com/support/ljE67550MFP
www.hp.com/support/ljE67560MFP
www.hp.com/support/colorljE67650MFP
www.hp.com/support/colorljE67660MFP



HP Color LaserJet Enterprise M652, M653
HP Color LaserJet Managed E65050, E65060
HP Color LaserJet Managed E65150, E65160
HP Color LaserJet Enterprise MFP M681, M682
HP Color LaserJet Managed MFP E67550, E67560
HP Color LaserJet Managed MFP E67650, E67660

Service manual: Troubleshooting

Copyright and License

© Copyright 2019 HP Development Company, L.P.

Reproduction, adaptation, or translation without prior written permission is prohibited, except as allowed under the copyright laws.

The information contained herein is subject to change without notice.


The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.


Edition 2, 4/2019


Trademark Credits


Microsoft®, Windows®, Windows® XP, and Windows Vista® are U.S. registered trademarks of Microsoft Corporation.

Conventions used in this guide


 **TIP:** Helpful hints or shortcuts.

 **NOTE:** Information that explains a concept or how to complete a task.

 **Reinstallation tip:** Reinstallation helpful hints, shortcuts, or considerations.

 **IMPORTANT:** Information that help the user to avoid potential printer error conditions.

 **CAUTION:** Procedures that the user must follow to avoid losing data or damaging the printer.

 **WARNING!** Procedures that the user must follow to avoid personal injury, catastrophic loss of data, or extensive damage to the printer.

HP service and support

Learn about HP access to additional service and support information.

Additional service and support for channel partners

Channel partners, go to partner.hp.com, and then use the steps below to access the HP Web-based Interactive Search Engine (WISE).

Access WISE for Channel partners

1. Select **Services & Support**, and then select **Services Delivery**.
2. Select **Technical Support**, and then select **Technical Documentation**.

Find information about the following topics

- Service manuals
- Service advisories
- Up-to-date control panel message (CPMD) troubleshooting
- Install and configure
- Printer specifications
- Solutions for printer issues and emerging issues
- Remove and replace part instructions and videos
- Warranty and regulatory information

Additional service and support for HP internal personnel

HP internal personnel, go to one of the following Web-based Interactive Search Engine (WISE) sites:

Americas (AMS)

- <https://support.hp.com/wise/home/ams-en> WISE - English
- <https://support.hp.com/wise/home/ams-es> WISE - Spanish
- <https://support.hp.com/wise/home/ams-pt> WISE - Portuguese
- <https://support.hp.com/wise/home/ams-fr> WISE - French

Asia Pacific / Japan (APJ)

- <https://support.hp.com/wise/home/apj-en> WISE - English
- <https://support.hp.com/wise/home/apj-ja> WISE - Japanese
- <https://support.hp.com/wise/home/apj-ko> WISE - Korean
- <https://support.hp.com/wise/home/apj-zh-Hans> WISE - Chinese (simplified)

- [https://support.hp.com/wise/home/apj-zh-HantWISE - Chinese \(traditional\)](https://support.hp.com/wise/home/apj-zh-HantWISE - Chinese (traditional))
- <https://support.hp.com/wise/home/apj-thWISE - Thai>

Europe / Middle East / Africa (EMEA)

- <https://support.hp.com/wise/home/emea-enWISE - English>

Table of contents

| | |
|--|----------|
| 1 Theory of operation | 1 |
| HP service and support | 2 |
| Additional service and support for channel partners | 2 |
| Additional service and support for HP internal personnel | 2 |
| Basic operation | 4 |
| Sequence of operation | 5 |
| Formatter-control system | 7 |
| Sleep mode | 7 |
| Printer job language (PJM) | 8 |
| Printer management language (PML) | 8 |
| Control panel | 8 |
| Easy-access USB port | 9 |
| Wireless | 9 |
| CPU | 9 |
| Input/output (I/O) | 9 |
| Memory | 9 |
| embedded MultiMedia Card (eMMC) | 9 |
| Hard disk drive (HDD) | 10 |
| Fax PCA | 10 |
| Nonvolatile random access memory (NVRAM) | 10 |
| Random access memory (RAM) | 10 |
| HP Memory Enhancement technology (MEt) | 10 |
| Engine-control system | 11 |
| DC controller | 12 |
| Motors | 13 |
| Fans | 14 |
| Solenoids | 14 |
| Clutches | 15 |
| Switches | 15 |
| Sensors | 16 |
| Front door lock function | 16 |
| Low-voltage power supply | 17 |

| | |
|--|----|
| Low-voltage power supply voltages description | 18 |
| Over-current/over-voltage protection | 19 |
| Sleep mode operation | 19 |
| Low-voltage power supply failure detection | 19 |
| Low-voltage power supply functions | 20 |
| High-voltage power supplies | 20 |
| High-voltage power supply circuits | 21 |
| Fuser bias | 22 |
| Fuser control | 23 |
| Fuser circuits | 23 |
| Fuser control functions | 24 |
| Fuser temperature control | 24 |
| Fuser heater protection | 25 |
| Fuser unit life detection | 26 |
| Fuser identification | 26 |
| Engine laser scanner system | 27 |
| Laser scanner failure detection | 28 |
| Safety | 28 |
| Image-formation process | 29 |
| Step 1: Pre-exposure | 34 |
| Step 2: Primary charging | 34 |
| Step 3: Laser-beam exposure | 35 |
| Step 4: Development | 35 |
| Step 5: Primary transfer | 36 |
| Step 6: Secondary transfer | 36 |
| Step 7: Separation | 37 |
| Step 8: Fusing | 37 |
| Step 9: ITB cleaning | 38 |
| Step 10: Drum cleaning | 38 |
| Toner cartridges | 39 |
| Design | 39 |
| Memory chip | 41 |
| Dynamic security | 41 |
| JetIntelligence | 41 |
| Authentication | 41 |
| Anti-theft | 41 |
| Toner seal | 42 |
| Toner level and cartridge life detection | 42 |
| Developing unit engagement and disengagement control | 42 |
| Intermediate transfer belt (ITB) unit | 44 |
| Primary-transfer roller engagement and disengagement control | 45 |

| | |
|---|----|
| ITB unit detection | 47 |
| ITB cleaning mechanism | 48 |
| Secondary transfer roller functions | 48 |
| Calibration | 49 |
| Pickup, feed, and delivery system | 50 |
| Photo sensors and switches | 51 |
| Motors, clutches, and solenoids | 53 |
| Paper trays | 54 |
| Tray 2 media type detection | 54 |
| Feed speed control | 55 |
| Duplexing unit | 57 |
| Duplexing reverse and duplex feed control | 57 |
| Jam detection/prevention | 57 |
| Fuser wrapping jam detection | 61 |
| Loop control | 61 |
| Pressure roller pressurization and depressurization control | 61 |
| Input accessories | 63 |
| 550-sheet paper feeder | 63 |
| 550-sheet paper feeder controller | 63 |
| 550-sheet paper feeder motor control | 64 |
| 550-sheet paper feeder electrical components | 64 |
| 550-sheet paper feeder paper pickup | 65 |
| 550-sheet paper feeder multiple feed prevention | 65 |
| 550-sheet paper feeder tray presence detection | 65 |
| 550-sheet paper feeder tray lift operation | 66 |
| 550-sheet paper feeder jam detection | 67 |
| 550-sheet paper-feeder | 68 |
| Motor control | 72 |
| Pickup-and-feed Operation | 72 |
| Staple stacker multi bin mailbox | 76 |
| Motor Control | 79 |
| Fan Control | 80 |
| Delivery Operation | 80 |
| Scanning and image capture system (M681/M682/E67550/E67560/E67650/E67660) | 83 |
| Document feeder system (M681/M682/E67550/E67560/E67650/E67660) | 84 |
| Document feed system | 84 |
| Sensors in the document feeder | 84 |
| Document feeder paper path | 85 |
| Document feeder simplex operation | 86 |
| Document feeder e-duplex operation | 87 |
| Deskew operation | 87 |

| | |
|---|-----------|
| Document feeder hinges | 88 |
| 2 Solve problems | 91 |
| HP service and support | 92 |
| Additional service and support for channel partners | 92 |
| Additional service and support for HP internal personnel | 92 |
| Manually unlock the front door | 94 |
| Solve problems checklist | 97 |
| Solve problems checklist | 97 |
| Print configuration report | 101 |
| Print settings menu map | 102 |
| Print current settings pages | 102 |
| Print event log | 103 |
| Pre-boot menu options | 105 |
| Remote Admin | 115 |
| Required software and network connection | 115 |
| Telnet client | 116 |
| Network connection | 117 |
| Connect a remote connection | 117 |
| Disconnect a remote connection | 121 |
| Troubleshooting process | 124 |
| Determine the problem source | 124 |
| Troubleshooting flowchart | 125 |
| Power subsystem | 126 |
| Power-on checks | 126 |
| Power-on troubleshooting overview | 126 |
| Troubleshooting a blank display, black display, no display, or no power situation | 126 |
| Control panel checks | 129 |
| Control panel diagnostics | 129 |
| Touchscreen diagnostic mode | 129 |
| Control panel system diagnostics | 132 |
| Control panel diagnostic flowcharts | 147 |
| Touchscreen black, white, or dim (no image) | 148 |
| Touchscreen has an unresponsive zone | 149 |
| No control panel sound | 150 |
| Home button is unresponsive | 151 |
| Hardware integration pocket (HIP) is not functioning (control panel functional) | 152 |
| Scanning subsystem (MFP) | 152 |
| Tools for troubleshooting | 153 |

| | |
|---|-----|
| Individual component diagnostics | 153 |
| Tools for troubleshooting: LED diagnostics | 153 |
| Understand lights on the formatter | 153 |
| Tools for troubleshooting: Engine diagnostics | 156 |
| Engine test button | 156 |
| Defeating interlocks | 158 |
| Disable cartridge check | 160 |
| Tools for troubleshooting: Paper path and sensor diagnostic tests | 161 |
| Paper path test | 161 |
| Paper path sensors test | 162 |
| Manual sensor tests | 164 |
| Tray/bin manual sensor test | 166 |
| Tools for troubleshooting: Print/stop test | 167 |
| Tools for troubleshooting: Component tests | 169 |
| Individual component diagnostics (special-mode test) | 169 |
| Scanner tests (MFP only) | 171 |
| Scanner tests | 171 |
| Diagrams | 173 |
| Diagrams: Block diagrams | 173 |
| Sensors and switches | 173 |
| Cross section diagrams | 177 |
| Printed circuit assembly (PCA) connector locations | 183 |
| Diagrams: External plug and port locations | 196 |
| Diagrams: Locations of major assemblies | 198 |
| Main assemblies (printer base) | 198 |
| Motor and fans | 200 |
| Rollers and toner collection unit | 202 |
| Printed circuit assemblies (PCAs; printer base) | 203 |
| Switches—E65150/E65160/E67650/E67660 models | 204 |
| Diagrams: General timing chart | 205 |
| Diagrams: General circuit diagrams | 206 |
| Internal test and information pages | 214 |
| Print the configuration page | 214 |
| Print a configuration page from a touchscreen control panel | 214 |
| Print a configuration page from an LCD control panel | 214 |
| HP embedded Jetdirect page | 216 |
| Finding important information on the configuration pages | 217 |
| Control panel menus | 218 |
| Reports menu | 218 |
| Settings menu | 221 |
| Copy menu (MFP only) | 256 |

| | |
|---|-----|
| Scan menu (MFP only) | 261 |
| Fax menu (fax models only) | 276 |
| Print menu | 279 |
| Supplies menu | 280 |
| Trays menu | 281 |
| Support Tools menu | 281 |
| Maintenance menu | 281 |
| Troubleshooting menu | 285 |
| Service menu | 289 |
| Resolve print-quality problems | 290 |
| Introduction | 290 |
| Troubleshoot print quality | 290 |
| Update the printer firmware | 290 |
| Print from a different software program | 290 |
| Check the paper-type setting for the print job | 290 |
| Check the paper type setting on the printer | 290 |
| Check the paper type setting (Windows) | 291 |
| Check the paper type setting (macOS) | 291 |
| Check toner-cartridge status | 291 |
| Print a cleaning page | 292 |
| Visually inspect the toner cartridge or cartridges | 292 |
| Check paper and the printing environment | 293 |
| Step one: Use paper that meets HP specifications | 293 |
| Step two: Check the environment | 293 |
| Step three: Set the individual tray alignment | 293 |
| Try a different print driver | 294 |
| Troubleshoot image defects | 295 |
| Clean the printer | 304 |
| Clean the paper path | 304 |
| Print a cleaning page | 304 |
| Enable and configure auto cleaning (touchscreen control panels only) | 305 |
| Check the scanner glass for dirt and smudges | 305 |
| Clean the pickup rollers and separation pad in the document feeder (MFP only) | 307 |
| Solve paper handling problems | 309 |
| Printer feeds incorrect page size | 309 |
| Printer pulls from incorrect tray | 309 |
| Printer will not duplex or duplexes incorrectly | 309 |
| Paper does not feed from Tray 2-X | 310 |
| Output is curled or wrinkled | 310 |
| Printer does not pick up paper or misfeeds | 311 |
| The printer does not pick up paper | 311 |

| | |
|---|-----|
| The printer picks up multiple sheets of paper | 312 |
| Paper does not feed automatically | 312 |
| Clear paper jams | 313 |
| Paper path jam sensor locations | 314 |
| Auto-navigation for clearing paper jams | 317 |
| Experiencing frequent or recurring paper jams? | 317 |
| Clear paper jams in the document feeder | 318 |
| 13.A1 tray 1 paper jam | 320 |
| 13.A2 tray 2 paper jam | 322 |
| 13.A3, 13.A4, 13.A5 tray 3, tray 4, tray 5 paper jam | 326 |
| 13.A 2000-sheet tray paper jam | 331 |
| 13.B9, 13.B2, 13.FF fuser paper jam | 335 |
| Clear jams in the output bin | 338 |
| 13.70.stapler/stacker paper jam | 339 |
| Clear staple jams in the 3-bin stapler/stacker | 341 |
| Change jam recovery | 343 |
| Solve performance problems | 344 |
| Factors affecting print performance | 344 |
| Print speeds | 345 |
| The printer does not print or it prints slowly | 345 |
| The printer prints slowly | 345 |
| The printer does not print | 346 |
| Solve wired network problems | 347 |
| Introduction | 347 |
| Poor physical connection | 347 |
| The computer is using the incorrect IP address for the printer | 347 |
| The computer is unable to communicate with the printer | 348 |
| The printer is using incorrect link and duplex settings for the network | 348 |
| New software programs might be causing compatibility problems | 348 |
| The computer or workstation might be set up incorrectly | 348 |
| The printer is disabled, or other network settings are incorrect | 348 |
| Solve wireless network problems | 349 |
| Introduction | 349 |
| Wireless connectivity checklist | 349 |
| The printer does not print after the wireless configuration completes | 350 |
| The printer does not print, and the computer has a third-party firewall installed | 350 |
| The wireless connection does not work after moving the wireless router or printer | 350 |
| Cannot connect more computers to the wireless printer | 350 |
| The wireless printer loses communication when connected to a VPN | 351 |
| The network does not appear in the wireless networks list | 351 |
| The wireless network is not functioning | 351 |

| | |
|--|------------|
| Reduce interference on a wireless network | 351 |
| Service mode functions | 352 |
| Service menu | 352 |
| Printer resets | 354 |
| Restore factory-set defaults | 354 |
| Restore the service ID | 355 |
| Printer cold reset | 355 |
| Format Disk and Partial Clean functions | 357 |
| Active and repository firmware locations | 357 |
| Partial Clean | 357 |
| Execute a Partial Clean | 358 |
| Format Disk | 358 |
| Execute a Format Disk | 359 |
| Firmware upgrades | 361 |
| Determine the installed revision of firmware | 362 |
| Perform a firmware upgrade | 364 |
| HP Embedded Web Server | 364 |
| USB flash drive (control-panel menu) | 365 |
| USB flash drive (Pre-boot menu) | 366 |
| Solve fax problems or email | 368 |
| Appendix A Printer specifications | 369 |
| Printer dimensions | 370 |
| Printer dimensions (M652/M653/E65050/E65060/E65150/E65160) | 370 |
| Printer dimensions (M681/M682/E67550/E67560/E67650/E67660) | 373 |
| Printer space requirements | 376 |
| Power consumption, electrical specifications, and acoustic emissions | 376 |
| Operating-environment range | 377 |
| Operating-environment range (M652/M653/E65050/E65060/E65150/E65160) | 377 |
| Operating-environment range (M681/M682/E67550/E67560/E67650/E67660) | 378 |
| Certificates of Volatility | 379 |
| Appendix B Revision history | 383 |
| Revision history | 384 |
| Index | 385 |

List of tables

| | | |
|------------|---|-----|
| Table 1-1 | Sequence of operation | 5 |
| Table 1-2 | Motors | 13 |
| Table 1-3 | Fans | 14 |
| Table 1-4 | Solenoids | 14 |
| Table 1-5 | Clutches | 15 |
| Table 1-6 | Switches | 15 |
| Table 1-7 | Sensors | 16 |
| Table 1-8 | Converted DC voltages | 18 |
| Table 1-9 | Low-voltage power supply functions | 20 |
| Table 1-10 | High-voltage power supply circuits | 21 |
| Table 1-11 | Fuser components | 23 |
| Table 1-12 | Low-voltage power supply functions | 24 |
| Table 1-15 | Toner cartridge functions | 39 |
| Table 1-17 | Primary-transfer roller engagement states | 45 |
| Table 1-18 | Secondary transfer roller functions | 48 |
| Table 1-19 | Calibration functions | 49 |
| Table 1-20 | Photo sensors and switches | 52 |
| Table 1-21 | Motors, clutches, and solenoids | 53 |
| Table 1-22 | Print mode and feed speed | 55 |
| Table 1-23 | Pickup, feed and delivery system functions | 56 |
| Table 1-25 | 550-sheet paper feeder motor control | 64 |
| Table 1-26 | 550-sheet paper feeder electrical components | 64 |
| Table 1-27 | Pickup feed components (1x550-sheet paper feeder) | 65 |
| Table 1-29 | Electrical component list (1x550-sheet paper-feeder/3x550-sheet paper-feeder) | 73 |
| Table 1-30 | Electrical component list (2,550-sheet paper-feeder) | 74 |
| Table 1-31 | Paper-feeder functions | 75 |
| Table 1-32 | Motor list | 79 |
| Table 1-33 | Electrical component list | 80 |
| Table 1-34 | Stapler/stacker functions | 82 |
| Table 1-35 | Document feeder sensors | 85 |
| Table 1-36 | Document feeder paper path | 85 |
| Table 2-1 | Pre-boot menu options (1 of 7) | 108 |

| | | |
|------------|--|-----|
| Table 2-2 | Pre-boot menu options (2 of 7) | 109 |
| Table 2-3 | Pre-boot menu options (3 of 7) | 110 |
| Table 2-4 | Pre-boot menu options (4 of 7) | 111 |
| Table 2-5 | Pre-boot menu options (5 of 7) | 111 |
| Table 2-6 | Pre-boot menu options (6 of 7) | 112 |
| Table 2-7 | Pre-boot menu options (7 of 7) | 113 |
| Table 2-8 | Troubleshooting flowchart | 125 |
| Table 2-9 | Heartbeat LED, product initialization | 154 |
| Table 2-10 | Heartbeat LED, product operational | 155 |
| Table 2-11 | Paper-path sensors diagnostic tests | 162 |
| Table 2-12 | Manual sensor diagnostic tests | 165 |
| Table 2-13 | Tray/bin manual sensors | 167 |
| Table 2-14 | Component test details | 170 |
| Table 2-15 | Product base, sensors and switches block diagram | 173 |
| Table 2-16 | 1x500-sheet paper feeder, sensors and switches block diagram | 174 |
| Table 2-17 | Paper deck, sensors and switches block diagram | 174 |
| Table 2-18 | HCI, sensors and switches block diagram | 175 |
| Table 2-19 | HP Stapling Mailbox, sensors and switches block diagram | 176 |
| Table 2-20 | Product base, cross section diagram | 177 |
| Table 2-21 | 1x550-sheet paper feeder, cross section diagram | 178 |
| Table 2-22 | Paper deck, 1x550, cross section diagram | 179 |
| Table 2-23 | Paper deck, 3x550, cross section diagram | 180 |
| Table 2-24 | HCI, cross section diagram | 181 |
| Table 2-25 | HP Stapling Mailbox, cross section diagram | 182 |
| Table 2-26 | DC controller connectors—M652/M653/M681/M682 | 183 |
| Table 2-27 | DC controller connectors—E65150/E65160/E67650/E67660 | 185 |
| Table 2-28 | Formatter PCA connectors—M652/M653/E65050/E65060/E65150/E65160 | 187 |
| Table 2-29 | Formatter PCA connectors—M681/M682/E67550/E67560/E67650/E67660 | 188 |
| Table 2-30 | 1x550-sheet paper feeder controller PCA connectors | 190 |
| Table 2-31 | Paper deck controller PCA connectors, 1x550 | 191 |
| Table 2-32 | Paper deck controller PCA connectors, 3x550 and 2,550 | 192 |
| Table 2-33 | HP Stapling Mailbox controller PCA connectors | 194 |
| Table 2-34 | Scanner controller PCA connectors | 195 |
| Table 2-35 | Main assemblies (printer base) | 198 |
| Table 2-36 | Main assemblies (printer base) | 199 |
| Table 2-37 | Motors | 200 |
| Table 2-38 | Fans | 201 |
| Table 2-39 | Rollers | 202 |
| Table 2-40 | PCAs (printer base) | 203 |
| Table 2-41 | Switches—E65150/E65160/E67650/E67660 models | 204 |
| Table 2-42 | Important information on the configuration pages | 217 |

| | | |
|------------|--|-----|
| Table 2-43 | Reports menu | 218 |
| Table 2-44 | Settings menu | 221 |
| Table 2-45 | Copy menu (MFP only) | 256 |
| Table 2-46 | Scan menu (MFP) | 261 |
| Table 2-47 | Fax menu (fax models only) | 276 |
| Table 2-48 | Print Options menu | 279 |
| Table 2-49 | Supplies menu | 280 |
| Table 2-50 | Trays menu | 281 |
| Table 2-51 | Backup/Restore menu | 281 |
| Table 2-52 | Calibrate/Cleaning menu | 282 |
| Table 2-53 | Troubleshooting menu | 285 |
| Table 2-54 | Image defects table quick reference | 295 |
| Table 2-55 | Banding defects | 297 |
| Table 2-56 | Black page | 297 |
| Table 2-57 | Blank page — No print | 298 |
| Table 2-58 | Color plane registrations defects (color models only) | 298 |
| Table 2-59 | Fixing/fuser defects | 299 |
| Table 2-60 | Gray background or dark print | 300 |
| Table 2-61 | Image placement defects | 300 |
| Table 2-62 | Light print | 301 |
| Table 2-63 | Output defects | 302 |
| Table 2-64 | Streak defects | 303 |
| Table 2-65 | Printer feeds incorrect page size | 309 |
| Table 2-66 | Printer pulls from incorrect tray | 309 |
| Table 2-67 | Printer will not duplex (print 2-sided jobs) or duplexes incorrectly | 309 |
| Table 2-68 | Paper does not feed from Tray 2-X | 310 |
| Table 2-69 | Output is curled or wrinkled | 310 |
| Table 2-70 | Paper does not feed automatically | 312 |
| Table 2-71 | Printer base jam sensors | 314 |
| Table 2-72 | 1x550-sheet and 3x550-sheet paper-deck jam sensors | 314 |
| Table 2-73 | 1x550-sheet and 3x550-sheet paper-deck jam sensors | 315 |
| Table 2-74 | 2,550-sheet paper deck jam sensors | 316 |
| Table 2-75 | Document feeder, sensors block diagram | 316 |
| Table 2-76 | Solve performance problems | 344 |
| Table A-1 | Dimensions for the n and dn models | 370 |
| Table A-2 | Dimensions for the x model | 370 |
| Table A-3 | Dimensions for the 1 x 550-sheet paper feeder | 370 |
| Table A-4 | Dimensions for the printer with one 1 x 550-sheet paper feeder | 370 |
| Table A-5 | Dimensions for the 1 x 550-sheet paper feeder with stand | 371 |
| Table A-6 | Dimensions for the printer and the 1 x 550-sheet paper feeder with stand | 371 |
| Table A-7 | Dimensions for the 3 x 550-sheet paper feeder with stand | 371 |

| | | |
|------------|--|-----|
| Table A-8 | Dimensions for the printer and the 3 x 550-sheet paper feeder with stand | 371 |
| Table A-9 | Dimensions for the High-capacity input feeder (HCI) with stand | 372 |
| Table A-10 | Dimensions for the printer and the High-capacity input feeder (HCI) with stand | 372 |
| Table A-11 | Dimensions for the M681dh/Flow M681f/E67650/E67660 models | 373 |
| Table A-12 | Dimensions for the M681f models | 373 |
| Table A-13 | Dimensions for the Flow M681z models | 373 |
| Table A-14 | Dimensions for the Flow M682z models | 373 |
| Table A-15 | Dimensions for the 1 x 550-sheet paper feeder | 373 |
| Table A-16 | Dimensions for the printer with one 1 x 550-sheet paper feeder | 374 |
| Table A-17 | Dimensions for the 1 x 550-sheet paper feeder with stand | 374 |
| Table A-18 | Dimensions for the printer and the 1 x 550-sheet paper feeder with stand | 374 |
| Table A-19 | Dimensions for the 3 x 550-sheet paper feeder with stand | 375 |
| Table A-20 | Dimensions for the printer and the 3 x 550-sheet paper feeder with stand | 375 |
| Table A-21 | Dimensions for the High-capacity input tray with stand | 375 |
| Table A-22 | Dimensions for the printer and the high-capacity input tray with stand | 375 |
| Table A-23 | Operating-environment specifications | 377 |
| Table A-24 | Operating-environment specifications | 378 |
| Table B-1 | Revision history | 384 |

List of figures

| | | |
|-------------|---|-----|
| Figure 1-6 | High-voltage power supply circuits | 21 |
| Figure 1-7 | Fuser temperature-control circuit | 25 |
| Figure 1-13 | Pre-exposure | 34 |
| Figure 1-14 | Primary charging | 34 |
| Figure 1-15 | Laser-beam exposure | 35 |
| Figure 1-16 | Development | 35 |
| Figure 1-17 | Primary transfer | 36 |
| Figure 1-18 | Secondary transfer | 36 |
| Figure 1-19 | Separation | 37 |
| Figure 1-20 | Fusing | 37 |
| Figure 1-21 | ITB Cleaning | 38 |
| Figure 1-22 | Drum cleaning | 38 |
| Figure 1-23 | Toner cartridge system | 39 |
| Figure 1-24 | Developer roller engagement and alienation control | 43 |
| Figure 1-26 | Three states of primary-transfer roller engagement and disengagement | 46 |
| Figure 1-27 | ITB cleaning process | 48 |
| Figure 1-29 | Pickup, feed, and delivery system photo sensors and switches | 52 |
| Figure 1-30 | Pickup, feed, and delivery system motors, clutches, and solenoids | 53 |
| Figure 1-31 | Media sensors | 55 |
| Figure 1-35 | 550-sheet paper feeder driver PCA | 64 |
| Figure 1-36 | Paper pickup and feed operation (550-sheet paper feeder) | 65 |
| Figure 1-41 | 1x550-sheet paper-feeder/3x550-sheet paper-feeder electrical components | 73 |
| Figure 1-42 | Outline of electrical component (2,550-sheet paper-feeder) | 74 |
| Figure 1-45 | Motors and solenoids | 80 |
| Figure 1-46 | Stapler/stacker sensors and switches | 81 |
| Figure 1-47 | Document feeder sensors | 85 |
| Figure 1-48 | Document feeder paper path | 85 |
| Figure 1-49 | Deskew operation | 88 |
| Figure 1-50 | Document feeder open (book mode) | 89 |
| Figure 1-51 | Document feeder open (60° to 80°) | 89 |
| Figure 2-1 | Open the Pre-boot menu | 105 |
| Figure 2-2 | Pre-boot menu | 106 |

| | | |
|-------------|---|-----|
| Figure 2-3 | Open the Pre-boot menu | 107 |
| Figure 2-4 | Open the Control Panel | 116 |
| Figure 2-5 | Turn Windows features on or off | 116 |
| Figure 2-6 | Enable the telnet client feature | 117 |
| Figure 2-7 | Select the +3:Administrator item | 118 |
| Figure 2-8 | Select the +A:Remote Admin item | 118 |
| Figure 2-9 | Select the 1:Start Telnet item | 118 |
| Figure 2-10 | Telnet connecting message | 118 |
| Figure 2-11 | Telnet error message | 119 |
| Figure 2-12 | Telnet server function initialized | 119 |
| Figure 2-13 | Open a command window | 120 |
| Figure 2-14 | Start a telnet session | 120 |
| Figure 2-15 | Establish a telnet connection | 120 |
| Figure 2-16 | Enter the PIN | 121 |
| Figure 2-17 | Remote Admin window | 121 |
| Figure 2-18 | Access the administrator menu | 122 |
| Figure 2-19 | Access the remote admin menu | 122 |
| Figure 2-20 | Terminate the telnet connection | 123 |
| Figure 2-21 | Diagnostic-tests access button | 129 |
| Figure 2-22 | Diagnostic-tests access button | 130 |
| Figure 2-23 | Press the diagnostics-access button | 130 |
| Figure 2-24 | Exit the diagnostic mode | 131 |
| Figure 2-25 | Open the Pre-boot menu | 132 |
| Figure 2-26 | Pre-boot menu | 133 |
| Figure 2-27 | Access the administration menu | 134 |
| Figure 2-28 | Access the diagnostics menu | 134 |
| Figure 2-29 | Open the screen test | 135 |
| Figure 2-30 | Blue vertical gradient screen | 135 |
| Figure 2-31 | Open the touch test | 139 |
| Figure 2-32 | Touch the white grid | 139 |
| Figure 2-33 | Verify the mark | 140 |
| Figure 2-34 | Open the softkey test | 141 |
| Figure 2-35 | Touch the Home button | 141 |
| Figure 2-36 | Successful test | 142 |
| Figure 2-37 | Open the backlight test | 143 |
| Figure 2-38 | Open the sound test | 144 |
| Figure 2-39 | Open the keyboard test | 145 |
| Figure 2-40 | Open the sound test | 146 |
| Figure 2-41 | Touchscreen blank, white, or dim (no image) | 148 |
| Figure 2-42 | Touchscreen has an unresponsive zone | 149 |
| Figure 2-43 | No control panel sound | 150 |

| | | |
|-------------|---|-----|
| Figure 2-44 | Home button is unresponsive | 151 |
| Figure 2-45 | Hardware integration pocket (HIP) is not functioning (control panel functional) | 152 |
| Figure 2-46 | Engine test button | 157 |
| Figure 2-47 | Defeating interlocks (front door) | 158 |
| Figure 2-48 | Defeating interlocks (right door) | 159 |
| Figure 2-49 | Printer base, sensors and switches block diagram | 173 |
| Figure 2-50 | 1x550-sheet paper feeder, sensors and switches block diagram | 174 |
| Figure 2-51 | Paper deck, sensors and switches block diagram | 174 |
| Figure 2-52 | HCI, sensors and switches block diagram | 175 |
| Figure 2-53 | HP Stapling Mailbox, sensors and switches block diagram | 176 |
| Figure 2-54 | Printer base, cross section diagram | 177 |
| Figure 2-55 | 1x550-sheet paper feeder, cross section diagram | 178 |
| Figure 2-56 | Paper deck, 1x550, cross section diagram | 179 |
| Figure 2-57 | Paper deck, 3x550, cross section diagram | 180 |
| Figure 2-58 | HCI, cross section diagram | 181 |
| Figure 2-59 | HP Stapling Mailbox, cross section diagram | 182 |
| Figure 2-60 | DC controller PCA connectors—M652/M653/M681/M682 | 183 |
| Figure 2-61 | DC controller PCA connectors—E65150/E65160/E67650/E67660 | 185 |
| Figure 2-62 | Formatter PCA connectors—M652/M653/E65050/E65060/E65150/E65160 | 187 |
| Figure 2-63 | Formatter PCA connectors—M681/M682/E67550/E67560/E67650/E67660 | 188 |
| Figure 2-64 | 1x550-sheet paper feeder controller PCA connectors | 190 |
| Figure 2-65 | Paper deck controller PCA connectors, 1x550 | 191 |
| Figure 2-66 | Paper deck controller PCA connectors, 3x550 and 2,550 | 192 |
| Figure 2-67 | HP Stapling Mailbox controller PCA connectors | 194 |
| Figure 2-68 | Scanner controller PCA connectors | 195 |
| Figure 2-69 | External plug and port locations (M652/M653/E65050/E65060/E65150/E65160) | 196 |
| Figure 2-70 | External plug and port locations (M681/M682/E67550/E67560/E67650/E67660) | 197 |
| Figure 2-71 | Main assemblies | 198 |
| Figure 2-72 | Main assemblies | 199 |
| Figure 2-73 | Motors | 200 |
| Figure 2-74 | Fans | 201 |
| Figure 2-75 | Rollers | 202 |
| Figure 2-76 | PCAs (printer base) | 203 |
| Figure 2-77 | Switches—E65150/E65160/E67650/E67660 models | 204 |
| Figure 2-78 | General timing chart | 205 |
| Figure 2-79 | General circuit diagram for the M652/M653/M681/M682 printer base (1 of 3) | 206 |
| Figure 2-80 | General circuit diagram for the M652/M653/M681/M682 printer base (2 of 3) | 206 |
| Figure 2-81 | General circuit diagram for the M652/M653/M681/M682 printer base (3 of 3) | 207 |
| Figure 2-82 | General circuit diagram for the E65150/E65160/E67650/E67660 printer base (1 of 4) | 208 |
| Figure 2-83 | General circuit diagram for the E65150/E65160/E67650/E67660 printer base (2 of 4) | 209 |
| Figure 2-84 | General circuit diagram for the E65150/E65160/E67650/E67660 printer base (3 of 4) | 210 |

| | | |
|--------------|---|-----|
| Figure 2-85 | General circuit diagram for the E65150/E65160/E67650/E67660 printer base (4 of 4) | 211 |
| Figure 2-86 | General circuit diagram for the 550-sheet feeder | 212 |
| Figure 2-87 | General circuit diagram for the 1x550-sheet and 3x550-sheet paper decks | 212 |
| Figure 2-88 | General circuit diagram for the 2,550-sheet paper deck | 213 |
| Figure 2-89 | General circuit diagram for the stapling mailbox | 213 |
| Figure 2-90 | Configuration page | 215 |
| Figure 2-91 | HP embedded Jetdirect page | 216 |
| Figure 2-92 | Printer jam sensors | 314 |
| Figure 2-93 | 1x550-sheet paper-feeder jam sensors | 314 |
| Figure 2-94 | 1x550-sheet and 3x550-sheet paper-deck jam sensors | 315 |
| Figure 2-95 | 2,550-sheet paper deck jam sensors | 316 |
| Figure 2-96 | Document feeder jam sensors | 316 |
| Figure 2-97 | Open the Pre-boot menu | 356 |
| Figure 2-98 | Open the Pre-boot menu | 358 |
| Figure 2-99 | Open the Pre-boot menu | 359 |
| Figure 2-100 | Configuration report | 363 |
| Figure 2-101 | Open the Pre-boot menu | 366 |
| Figure A-1 | Certificate of Volatility (1 of 2; M652/M653/E65050/E65060/E65150/E65160) | 379 |
| Figure A-2 | Certificate of Volatility (2 of 2; M652/M653/E65050/E65060/E65150/E65160) | 380 |
| Figure A-3 | Certificate of Volatility (1 of 2; M681/M682/E67550/E67560/E67650/E67660) | 381 |
| Figure A-4 | Certificate of Volatility (2 of 2; M681/M682/E67550/E67560/E67650/E67660) | 382 |

1 Theory of operation

- [HP service and support](#)
- [Basic operation](#)
- [Formatter-control system](#)
- [Engine-control system](#)
- [Engine laser scanner system](#)
- [Pickup, feed, and delivery system](#)
- [Input accessories](#)
- [Scanning and image capture system \(M681/M682/E67550/E67560/E67650/E67660\)](#)
- [Document feeder system \(M681/M682/E67550/E67560/E67650/E67660\)](#)

HP service and support

Learn about HP access to additional service and support information.

Additional service and support for channel partners

Channel partners, go to partner.hp.com, and then use the steps below to access the HP Web-based Interactive Search Engine (WISE).

Access WISE for Channel partners

1. Select **Services & Support**, and then select **Services Delivery**.
2. Select **Technical Support**, and then select **Technical Documentation**.

Find information about the following topics

- Service manuals
- Service advisories
- Up-to-date control panel message (CPMD) troubleshooting
- Install and configure
- Printer specifications
- Solutions for printer issues and emerging issues
- Remove and replace part instructions and videos
- Warranty and regulatory information

Additional service and support for HP internal personnel

HP internal personnel, go to one of the following Web-based Interactive Search Engine (WISE) sites:

Americas (AMS)

- <https://support.hp.com/wise/home/ams-enWISE> - English
- <https://support.hp.com/wise/home/ams-esWISE> - Spanish
- <https://support.hp.com/wise/home/ams-ptWISE> - Portuguese
- <https://support.hp.com/wise/home/ams-frWISE> - French

Asia Pacific / Japan (APJ)

- <https://support.hp.com/wise/home/apj-enWISE> - English
- <https://support.hp.com/wise/home/apj-jaWISE> - Japanese
- <https://support.hp.com/wise/home/apj-koWISE> - Korean
- <https://support.hp.com/wise/home/apj-zh-HansWISE> - Chinese (simplified)

- [https://support.hp.com/wise/home/apj-zh-HantWISE - Chinese \(traditional\)](https://support.hp.com/wise/home/apj-zh-HantWISE - Chinese (traditional))
- <https://support.hp.com/wise/home/apj-thWISE - Thai>

Europe / Middle East / Africa (EMEA)

- <https://support.hp.com/wise/home/emea-enWISE - English>


Basic operation

The printer routes all high-level processes through the formatter, which stores font information, processes the print image, and communicates with the host computer.

The basic printer operation comprises the following systems:

- The engine-control system, which includes the power supply and the DC controller printed circuit assembly (PCA)
- The laser scanner system, which forms the latent image on the photosensitive drum
- The image-formation system, which transfers a toner image onto the paper
- The pickup, feed, and delivery system, which uses a system of rollers and belts to transport the paper through the printer
- Accessory (optional paper feeder)

Figure 1-1 Relationship among the main printer systems

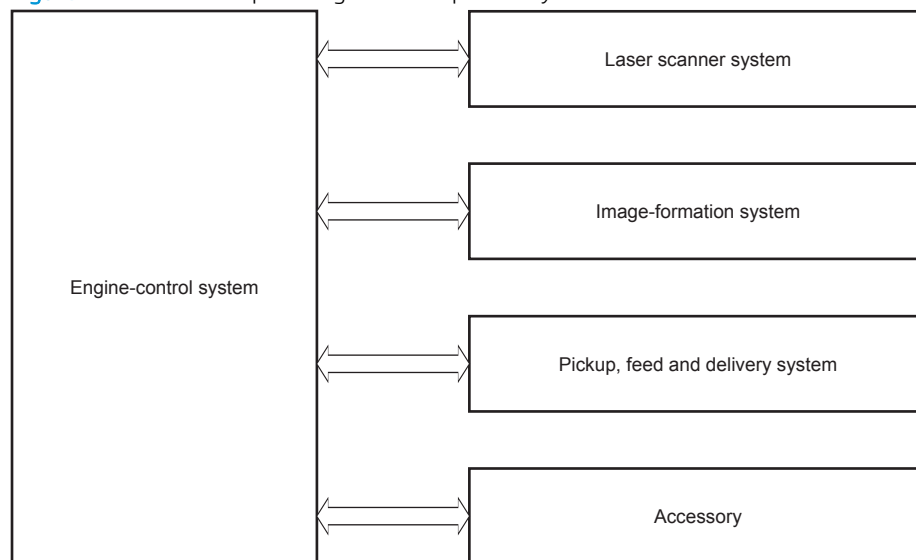

Sequence of operation

The DC controller PCA controls the operating sequence, as described in the following table.

Table 1-1 Sequence of operation

| Period | Duration | Description |
|------------------|---|--|
| Waiting | From the time the power is turned on, the door is closed, or when the printer exits Sleep mode until the printer is ready for printing. | <ul style="list-style-type: none">• Detects the fuser• Heats the fuser sleeve in the fuser• Pressurizes the pressure roller in the fuser• Detects the toner cartridges• Alienates all of the developing rollers from the photosensitive drums in the toner cartridges• Alienates all of the transfer rollers from the photosensitive drums in the toner cartridges• Rotates and stops each motor• Rotates and stops each fan• Detects the ITB• Cleans the ITB and secondary transfer roller |
| Standby | From the end of the waiting sequence, the last rotation until the formatter receives a print command, or until the printer is turned off. | <ul style="list-style-type: none">• Is in the Ready state• Enters Sleep mode if the formatter sends the sleep command• Rotates and stops each fan• Calibrates if the formatter sends the calibration command |
| Initial rotation | From the time the formatter receives a print command until the paper enters the paper path. | <ul style="list-style-type: none">• Rotates each motor• Rotates each fan• Activates the high-voltage power supply• Prepares the laser scanner unit• Warms the fuser to the correct temperature |

Table 1-1 Sequence of operation (continued)

| Period | Duration | Description |
|---------------|---|---|
| Printing | From the time the first sheet of paper enters the paper path until the last sheet has passed through the fuser. | <ul style="list-style-type: none">• Forms the image on the photosensitive drums• Transfers the toner to the paper• Fuses the toner image onto the paper |
| Last rotation | From the time the last sheet of paper exits the fuser until the motors stop rotating. | <ul style="list-style-type: none">• Moves the last printed sheet into the output bin• Stops each motor• Stops each fan• Stops the high-voltage power supply• Stops the laser scanner unit• Turns the fuser heater off• If another print command is received, the printer enters the initial rotation period when the last rotation is complete. |


Formatter-control system

The formatter performs the following functions:

- Controls sleep mode
- Receives and processes print data from the various printer interfaces
- Monitors control panel functions and relays printer status information through the control panel and the network or bi-directional interface
- Develops and coordinates data placement and timing with the DC controller PCA
- Stores font information
- Communicates with the host computer through the network or the bidirectional interface

The formatter receives a print job from the network or bidirectional interface and separates it into image information and instructions that control the printing process. The DC controller PCA synchronizes the image formation system with the paper input and output systems, and then signals the formatter to send the print image data.

Sleep mode

 **NOTE:** To modify sleep settings: At the control panel, select the [Settings](#) menu, select the [General](#) menu, select the [Energy Settings](#) menu, and then select [Sleep Settings](#).

This feature conserves power after the printer has been idle for an adjustable period of time. When the printer is in Sleep mode, the printer retains all settings, downloaded fonts, and macros. The default setting is for Sleep mode to be enabled, and the printer enters Sleep mode after a 30-second idle time.

The printer firmware uses a combination of timers and Sleep settings to control when the printer enters a different state as well as what states the printer will enter. The available states are listed below, in descending order, from using the most power to using the least power:

- **Active:** The printer control panel is fully illuminated. The power button light is illuminated.
- **Shallow sleep:** The printer control panel is dim and the content is grayed out, but is still readable. The power button light is illuminated.
- **Sleep:** The printer control panel is off (blacked out). The power button light blinks once every three seconds.
- **Deep sleep:** The printer control panel is off (blacked out). The power button light blinks once every three seconds. The control panel and power button appearance is the same in this state as the sleep state. However, the printer is drawing less than 1 watt of power in the deep sleep state (as opposed to 6 watts of power in the sleep state).
- **Off:** This state is entered by pressing the power button or removing power from the printer. The power button light is not illuminated.

 **NOTE:** In some countries/regions, Sleep mode cannot be turned off.

The printer exits Sleep mode and enters the warm-up cycle when any of the following events occur:

- The printer receives a print job, valid data, or a PML or PJJL command.
- A control-panel button is pressed or the touchscreen is touched.

- A cover or door is opened.
- The engine self-test switch is pressed.
- A paper tray, other than Tray 1, is opened.



NOTE: If the printer is in the deep sleep state, opening a paper tray will not cause the printer to exit Sleep mode.



NOTE: Printer error messages override the Sleep message. Some messages, such as 49 errors, do not allow the printer to enter Sleep mode. Other messages allow the printer to enter Sleep mode at the appropriate time, but the error message continues to appear.

Printer job language (PJM)

PJM is an integral part of printer configuration, in addition to the standard printer command language (PCL) and PostScript (PS). With standard cabling, the printer can use PJM to perform a variety of functions, such as these:

- **Two-way communication with the host computer through a network connection or a USB device port:** The printer can inform the host about the control-panel settings, and the control-panel settings can be changed from the host.
- **Dynamic I/O switching:** The printer uses this switching to be configured with a host on each I/O. The printer can receive data from more than one I/O simultaneously, until the I/O buffer is full. This can occur even when the printer is offline.
- **Context-sensitive switching:** The printer can automatically recognize the personality (PS or PCL) of each job and configure itself to serve that personality.
- **Isolation of print environment settings from one print job to the next:** For example, if a print job is sent to the printer in landscape mode, the subsequent print jobs print in landscape only if they are formatted for landscape printing.

Printer management language (PML)

PML allows remote configuration of the printer and status read-back from the printer through the I/O ports.

Control panel

The M652n/M652dn control panel is a 6.85 cm (2.7 in) four-line color display with numeric keypad and additional buttons for navigating control panel menus. The M653dn/M653x/M653dh/E65150/E65160 control panel is a 10.9 cm (4.3 in) full-color SVGA with infrared touchscreen and adjustable viewing angle. The M681/M682/E67550/E67560/E67650/E67660 control panel is a 20.3 cm (8 in) full-color SVGA with infrared touchscreen and adjustable viewing angle.

The M681/M682/E67550/E67560/E67650/E67660 control panel has a diagnostic mode to allow testing of the touchscreen, [Home](#) button, and speaker. The control panels do not require calibration.

The M653dn, M653x, and M653dh control panel has a diagnostic button on the back with some diagnostic capabilities.

See the Control-panel checks section of this manual for more information on accessing control panel diagnostics.

Easy-access USB port

This printer features easy-access USB printing, for quickly printing files without sending them from a computer. The printer accepts standard USB flash drives in the USB port near the control panel. It supports the following types of files:

- **.pdf:** A portable document format file used to present and exchange documents reliably, independent of software, hardware, or operating system.
- **.prn:** A generic file created by choosing “Print to File” within the Print dialog box.
- **.pcl:** A file created in the Printer Command Language (PCL) which describes the layout of text and graphics for the document.
- **.ps:** A file created in the Adobe PostScript language. These files can contain images, text or a combination thereof.
- **.cht:** A vector graphics format file supported by a variety of charting and graphics software.

The USB port is disabled by default. Follow the instructions in the printer user guide to enable the USB port and print USB documents.

Wireless

The M653x and Flow M682z models contain a wireless card to enable wireless direct printing over a 802.11b/g/n wireless connection.



NOTE: This card does not enable the printer to connect to the network.

CPU

The formatter incorporates a 1.2 GHz processor.

Input/output (I/O)

The printer has three I/O interfaces:

- Hi-Speed USB 2.0
- 10/100/1000 Ethernet LAN connection with IPv4 and IPv6
- Easy-access USB printing (no computer required)

Memory

The formatter incorporates different types of memory and storage to store the printer firmware as well as print-job data and user settings.

embedded MultiMedia Card (eMMC)

The embedded MultiMedia Card (eMMC) on the formatter stores the firmware for the M652/M653/E65050/E65060/E65150/E65160 models. A remote firmware upgrade process is used to overwrite and upgrade the firmware. If a hard disk drive (HDD) is installed on the M652/M653/E65050/E65060/E65150/E65160 models, the firmware will automatically transfer to the HDD. Print jobs may also be stored on the eMMC for printing privately or at a later time.

Hard disk drive (HDD)

The hard disk drive (HDD) on the formatter stores the firmware for the M681/M682/E67550/E67560/E67650/E67660 models. A remote firmware upgrade process is used to overwrite and upgrade the firmware. Print jobs may also be stored on the HDD for printing privately or at a later time.

Fax PCA

The fax PCA allows the transmission and receipt of faxes. Fax jobs are stored temporarily on the PCA.

Nonvolatile random access memory (NVRAM)

The printer uses NVRAM to store printer and user configuration settings. The contents of NVRAM are retained when the printer is turned off or disconnected.

Random access memory (RAM)

The RAM on the formatter serves as a temporary storage area for printing and system operation.

HP Memory Enhancement technology (MEt)

MEt effectively doubles the amount of standard memory through a variety of font- and data-compression methods.




NOTE: MEt is available only when printing in printer command language (PCL) mode. It is not functional when printing in PostScript (PS) mode.

Engine-control system

The engine-control system receives commands from the formatter and interacts with the other main systems to coordinate all printer functions. The engine-control system consists of the following components:

- DC controller
- Low-voltage power supply
- High-voltage power supplies
- Fuser power supply


Figure 1-2 Engine-control system

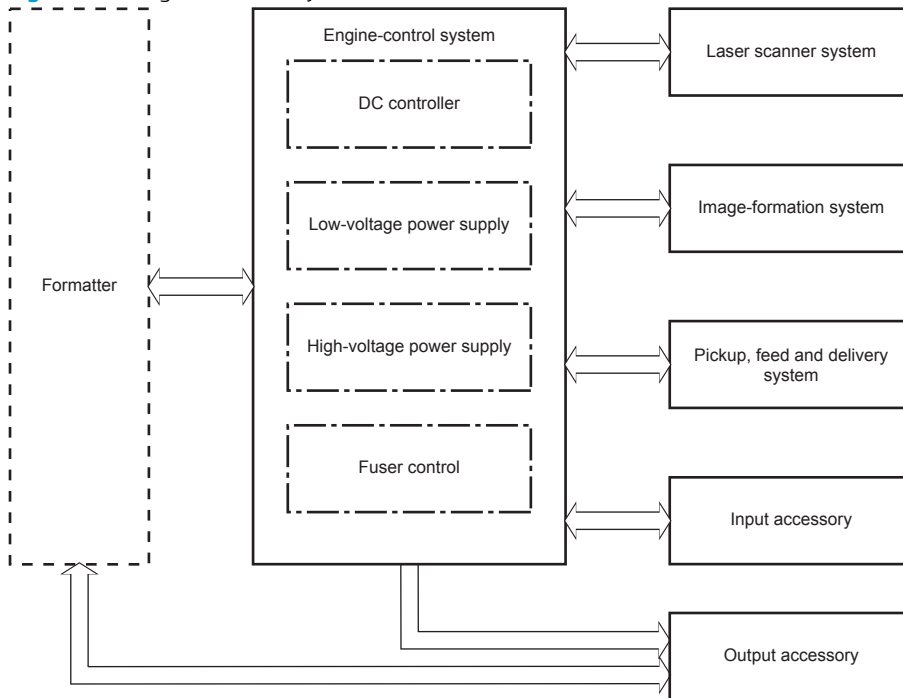

DC controller

The DC controller controls the operation of the printer and its components. The DC controller starts the printer operation when the printer power is turned on and the power supply sends DC voltage to the DC controller. After the printer enters the standby period, the DC controller sends out various signals to operate motors, solenoids, and other printer components based on the print command and image data that the host computer sends.

Figure 1-3 DC controller block diagram

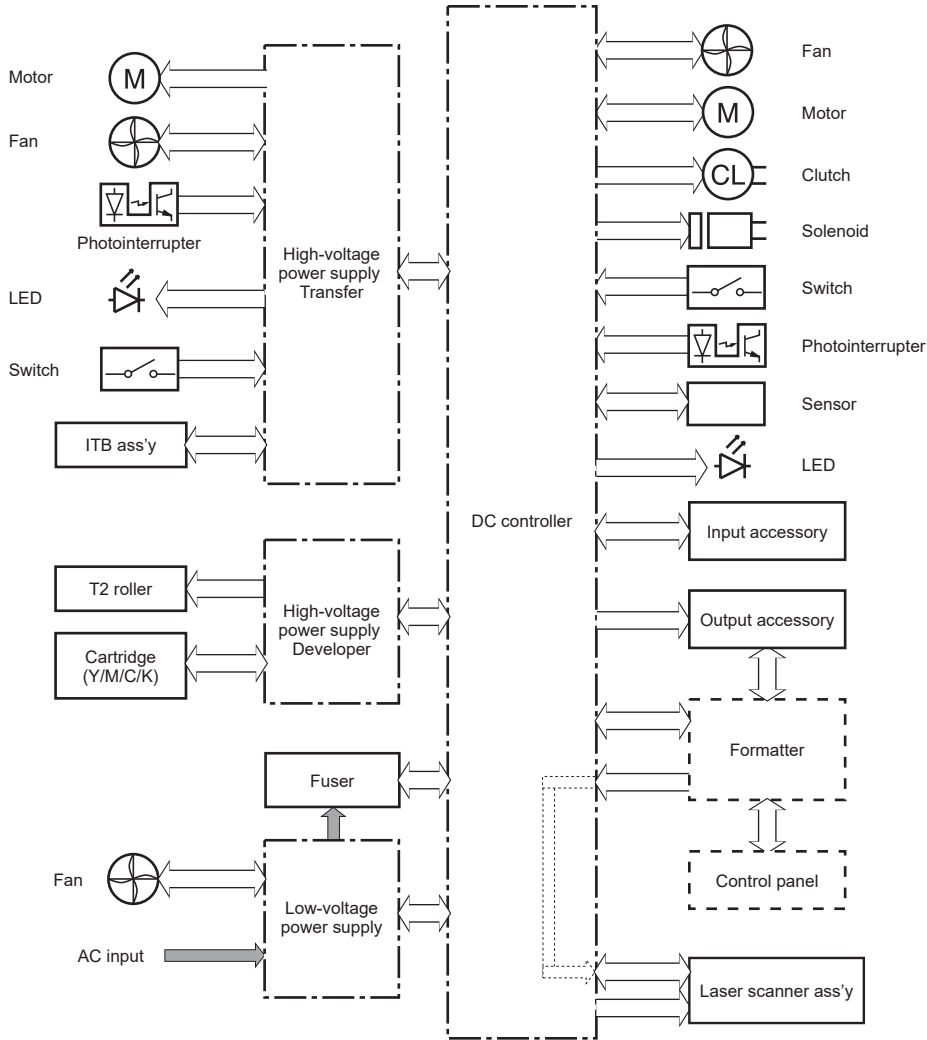

Motors

The printer has eight motors. The motors drive the components in the paper-feed and image-formation systems.

The DC controller monitors the fuser motor, the scanner motor, and drum motors 1, 2, and 3 to determine if a motor has failed. It notifies the formatter when it encounters the following conditions:

- Startup failure: the motor does not reach a specified speed within a specified time from when the motor starts.
- Rotational failure: the rotational speed of the motor is not in the specified range for a specified time after the motor reaches a specified speed.

Table 1-2 Motors

| Abbreviation | Name | Purpose | Failure detection | Replacement part number |
|--------------|-------------------------------|---|-------------------|--|
| M1 | Drum motor 1 | Drives the yellow photosensitive drum and yellow developing roller | Yes | Drum motor (RM2-1956-000CN) |
| M2 | Drum motor 2 | Drives the magenta photosensitive drum, magenta developing roller, cyan photosensitive drum, and cyan developing roller | Yes | Drum motor (RM2-1956-000CN) |
| M3 | Drum motor 3 | Drives the black photosensitive drum, black developing roller, and ITB | Yes | Drum motor (RM2-1956-000CN) |
| M4 | Fuser motor | Drives the pressure roller and delivery roller; the pressurization and release of the pressure roller; and the engagement and disengagement of the primary and secondary transfer rollers | Yes | Fuser drive assembly (RM2-1934-000CN) |
| M5 | Pickup motor | Drives the registration roller, Tray 1 pickup roller, Tray 2 pickup roller, and Tray 2 feed roller | No | Paper pickup drive assembly (RM2-6556-000CN) |
| M6 | Developer disengagement motor | Drives the engagement and disengagement of the developing rollers | Yes | Stepping motor (RK2-7757-000CN) |
| M7 | Scanner motor | Drives the scanner mirror | Yes | Laser scanner assembly (RM2-1237-000CN) |
| M8 | Duplex reverse motor | Drives the duplex reverse roller | No | Right door (RM2-6622-000CN) |

Fans

The printer has six fans for preventing the temperature from rising in the printer and for cooling the printed pages.

The DC controller determines if there is a fan failure and notifies the formatter if the fan locks for a specified time from when the fan starts.

Table 1-3 Fans

| Abbreviation | Name | Cooling area | Type | Speed | Replacement part number |
|--------------|----------------------|--|--------|-----------|-------------------------|
| FM1 | Power supply fan | Around the low-voltage power supply unit | Intake | Full/half | Fan (RK2-7953-000CN) |
| FM2 | Cartridge fan | Around the toner cartridges | Intake | Full | Fan (RK2-6124-000CN) |
| FM3 | Left upper front fan | Around the fuser Around the delivery assembly | Intake | Full/half | Fan (RK2-7951-000CN) |
| FM4 | Left upper rear fan | Around the fuser Around the delivery assembly | Intake | Full/half | Fan (RK2-7949-000CN) |
| FM5 | Front fan | Fuser | Intake | Full/half | Fan (RK2-6124-000CN) |
| FM6 | Rear fan | Around the low-voltage power supply assembly Around the formatter | Intake | Full/half | Fan (RK2-6124-000CN) |

Solenoids

Table 1-4 Solenoids

| Abbreviation | Component name | Replacement part number |
|--------------|---|--------------------------------------|
| SL1 | Primary transfer roller disengagement solenoid | Right door assembly (RM2-6622-000CN) |
| SL2 | Tray 1 pickup solenoid | Right door assembly (RM2-6622-000CN) |
| SL3 | Duplex reverse solenoid | Right door assembly (RM2-6622-000CN) |
| SL4 | Front door left lock solenoid (E65150/E65160/E67650/E67660 models) | Part not available |
| SL5 | Front door right lock solenoid (E65150/E65160/E67650/E67660 models) | Part not available |

Clutches

Table 1-5 Clutches

| Abbreviation | Component name |
|--------------|-------------------------|
| CL1 | Tray 2 pickup clutch |
| CL2 | Duplex re-pickup clutch |

Switches

Table 1-6 Switches

| Abbreviation | Component name | Replacement part number |
|--------------|--|--|
| SW1 | 24V interlock switch | Interlock switch cable assembly (RM2-8449-000CN; part not available) |
| SW2 | ITB toner collection near full switch | Lever full flag (RC4-6528-000CN; part not available) |
| SW3 | 5V right door switch | Right door assembly (RM2-6622-000CN) |
| SW4 | Power supply switch | Power supply switch assembly (RM2-1947-000CN) |
| SW5 | Tray 2 media size switch | Size detect switch assembly (RM2-1946-000CN; part not available) |
| SW6 | 24V front door microswitch | Microswitch (RK2-0535-000CN) |
| SW9 | 5V interlock switch (E65150/E65160/E67650/E67660 models) | Part not available |
| SW101 | Test print switch | Part not available |

Sensors

Table 1-7 Sensors

| Abbreviation | Component name | Replacement part number |
|--------------|-----------------------------------|--|
| SR11 | Registration sensor | Registration assembly (RM2-1957-000CN) |
| SR12 | Registration media width sensor 1 | Registration assembly (RM2-1957-000CN) |
| SR13 | Registration media width sensor 2 | Registration assembly (RM2-1957-000CN) |
| SR14 | Tray 2 media out sensor | Paper pick-up roller assembly (RM2-1275-000CN) |
| SR51 | Drum home position sensor Y | Main drive assembly (RM2-1927-000CN) |
| SR52 | Drum home position sensor MC | Main drive assembly (RM2-1927-000CN) |
| SR53 | Drum home position sensor K | Main drive assembly (RM2-1927-000CN) |
| SR54 | Developer alienation sensor | Main drive assembly (RM2-1927-000CN) |
| SR62 | FD1 media full sensor | Paper delivery assembly (RM2-6621-000CN) |
| SR66 | Duplex flapper position sensor | Paper delivery assembly (RM2-6621-000CN) |
| SR94 | Duplex feed sensor | Right door assembly (RM2-6622-000CN) |
| SR95 | Tray 1 media out sensor | Right door assembly (RM2-6622-000CN) |
| SR1901 | ITB alienation sensor | ITB maintenance kit (P1B93-67901) |
| SR8611 | Fuser output sensor 1 | Fuser kit (110V) (RM2-1928-000CN) Fuser kit (220V) (RM2-1929-000CN) |
| SR8612 | Fuser pressure release sensor | Fuser kit (110V) (RM2-1928-000CN) Fuser kit (220V) (RM2-1929-000CN) |
| SR8613 | Fuser output sensor 2 | Fuser kit (110V) (RM2-1928-000CN) Fuser kit (220V) (RM2-1929-000CN) |
| SR8615 | Fuser loop sensor | Fuser kit (110V) (RM2-1928-000CN) Fuser kit (220V) (RM2-1929-000CN) |

Front door lock function

The E65150/E65160/E67650/E67660 models have a front-door locking mechanism. The lock mechanisms reside on the right and left ends of the front door, and the lock function works with two solenoids (SL4/SL5). The DC controller makes the solenoids function when it receives a formatter command to lock or unlock the front door. The solenoids maintain the front door lock/unlock status even after they function.

Low-voltage power supply

The low-voltage power-supply (LVPS) circuit converts the AC power from the wall receptacle into the DC voltage that the printer components use.

IMPORTANT: Make sure to plug the printer into the correct power source (110/220V).

Figure 1-4 Low-voltage power-supply circuit—M652/M653/M681/M682


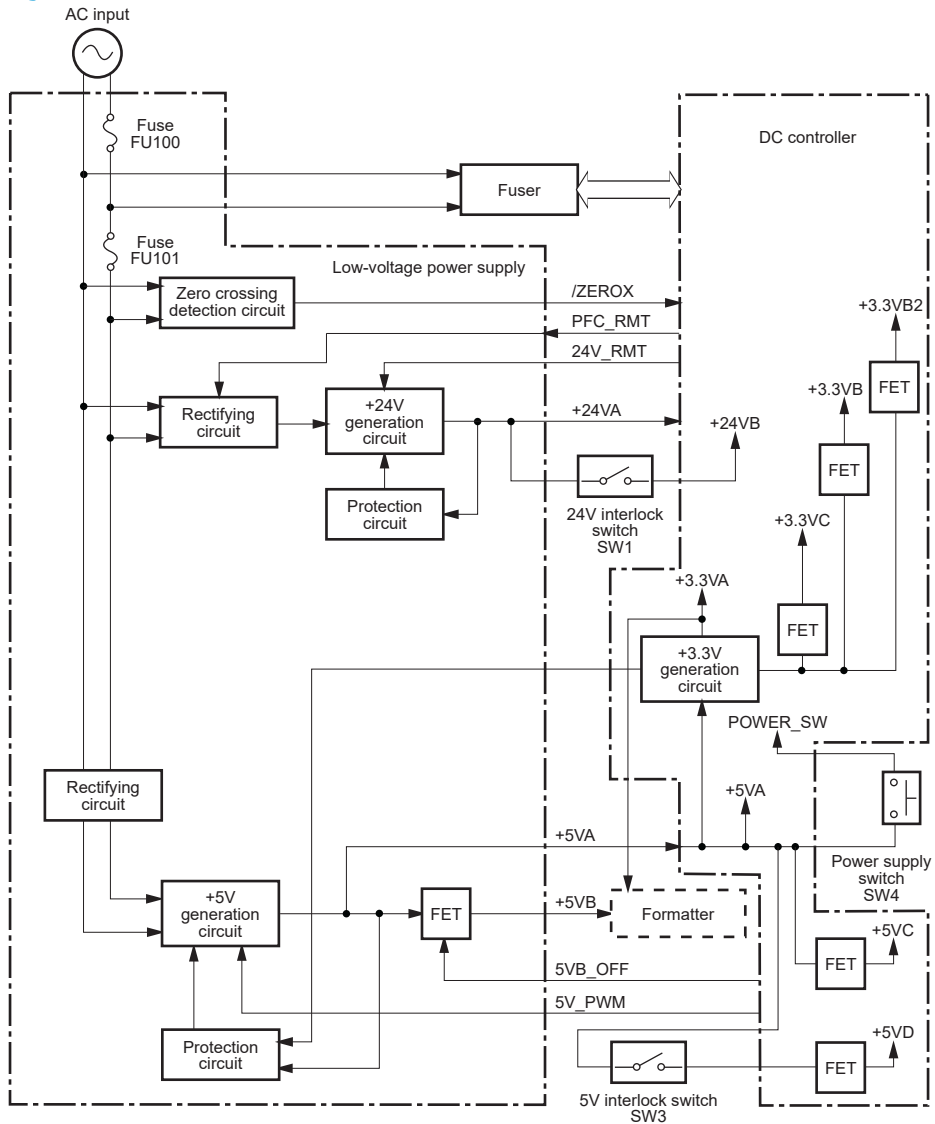


Figure 1-5 Low-voltage power-supply circuit—E65150/E65160/E67650/E67660

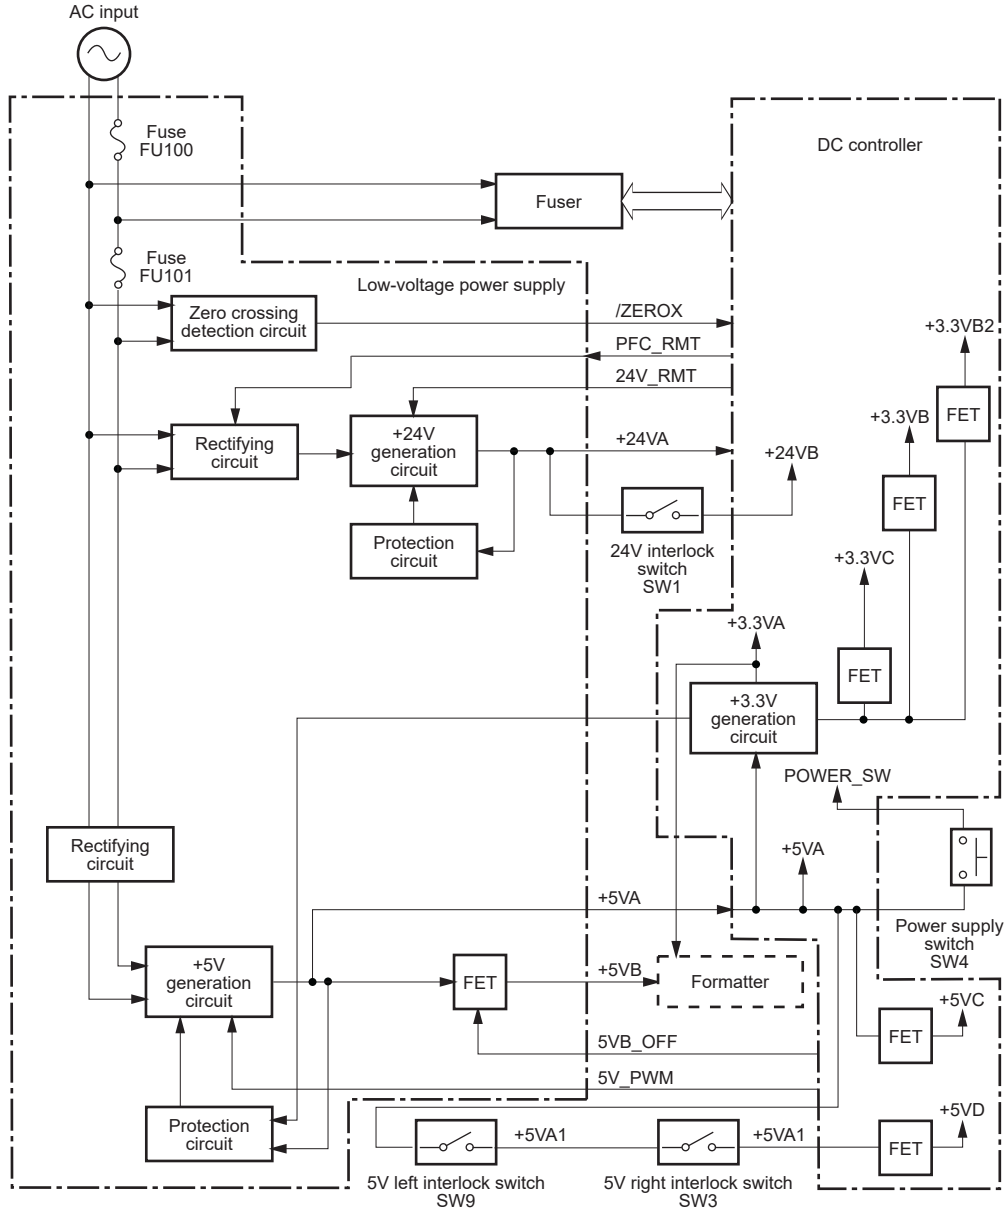

Low-voltage power supply voltages description

The low-voltage power supply converts the AC power into three DC voltages, which it then subdivides, as described in the following table.

Table 1-8 Converted DC voltages

| Main DC voltage | Sub-voltage | Behavior |
|-----------------|-------------|--|
| +24 V | +24 VA | Constantly supplied |
| | +24 VB | Stopped during active OFF or inactive OFF Interrupted when the right door is open (SW1/SW3) |
| +5 V | +5 VA | Constantly supplied |
| | +5 VB | Stopped during active OFF or inactive OFF |

Table 1-8 Converted DC voltages (continued)

| Main DC voltage | Sub-voltage | Behavior |
|-----------------|-------------|---|
| | +5 VB | Constantly supplied Stopped during active OFF or inactive OFF |
| | +5 VC | Constantly supplied Stopped during active OFF or inactive OFF |
| | +5VD | Constantly supplied Stopped during active OFF or inactive OFF Stopped when the front door or the right door is opened (SW1/SW3) |
| +3.3 V | +3.3 VA | Constantly supplied |
| | +3.3 VB | Constantly supplied Stopped during inactive OFF |
| | +3.3V B2 | Constantly supplied Stopped during inactive OFF Intermittent supplied during active OFF |
| | +3.3 VC | Constantly supplied Stopped during active OFF or inactive OFF |

Over-current/over-voltage protection

The low-voltage power supply automatically stops supplying the DC voltage to the printer components whenever it detects excessive current or abnormal voltage. The low-voltage power supply has a protective circuit against over-current and over-voltage to prevent failures in the power supply circuit.

⚠ CAUTION: If DC voltage is not being supplied from the low-voltage power supply, the protective function might be running. In this case, turn the power switch off and unplug the power cord.

Do not turn the power switch on until the root cause is found and corrected.

If the protective function is active, the DC controller notifies the formatter of a low-voltage power supply failure. In addition, the low-voltage power supply has two fuses to protect against over-current. If over-current flows into the AC line, the fuse stops the AC power.

Sleep mode operation

Sleep mode conserves energy by stopping the power to several components when the printer is idle. If the DC controller detects voltage that is too high when the printer is in Sleep mode, it determines that the low-voltage power supply has failed, and it notifies the formatter.

Low-voltage power supply failure detection

The DC controller determines a low-voltage power supply failure and notifies the formatter when the low-voltage power supply does not supply +24 V.

Low-voltage power supply functions

The printer has the following low-voltage power supply functions.

Table 1-9 Low-voltage power supply functions

| Function | Supported feature |
|--|-------------------|
| Sleep mode | No |
| Power supply voltage detection | No |
| Automatic power OFF | No |
| Automatic power ON/OFF | No |
| Active OFF | Yes |
| Inactive OFF | Yes |
| Network mode | No |
| Power switch illumination | No |
| Low-voltage power supply failure detection | No |
| Power save mode | No |

High-voltage power supplies

The DC controller controls the high-voltage power supplies (HVPS) to generate biases. The high-voltage power supplies deliver the high-voltage biases to the following components used to transfer toner during the image-formation process:

- Primary charging roller (in the toner cartridges)
- Developing roller (in the toner cartridges)
- Primary transfer roller
- Secondary transfer roller
- Pressure roller
- ITB cleaning brush

High-voltage power supply circuits

The high-voltage power supplies contains the following separate circuits.

Figure 1-6 High-voltage power supply circuits

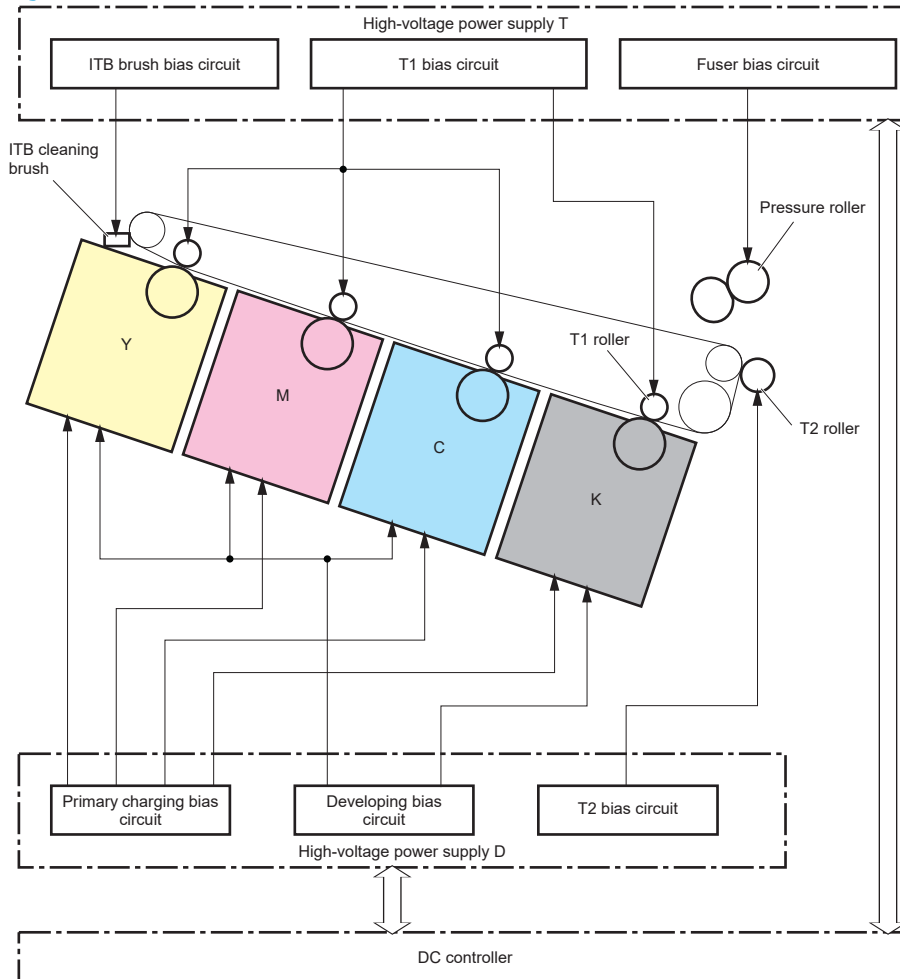


Table 1-10 High-voltage power supply circuits

| Circuit | Description |
|------------------------------------|---|
| Primary-charging-bias generation | The primary charging bias negatively charges the surface of the photosensitive drum to prepare for image formation. |
| Developing-bias generation | The developing bias adheres toner to an electrostatic latent image formed on the photosensitive drums. |
| Primary-transfer-bias generation | The primary transfer bias transfers the toner from each photosensitive drum onto the ITB. |
| Secondary-transfer-bias generation | The positive secondary transfer bias transfers the toner image from the ITB onto the paper. The negative bias transfers residual toner on the secondary transfer roller back to the ITB. The residual toner on the ITB is deposited in the toner collection unit. |

Fuser bias

The printer uses instant-on fusing, which allows faster increases in fuser temperature to print the first page faster when a printer is coming out of low-power mode. The fuser bias is DC positive for improved print quality. The fuser bias circuit is located in the high-voltage power supply, HVPS (T).

Fuser control

The DC controller and components in the fuser perform the following functions related to fuser operation:

- Control fuser temperature
- Detect fuser failures
- Prevent excessive temperature rise
- Detect remaining life in the fuser
- Determine if the correct fuser is installed

Fuser circuits

The fuser heater control circuit and the fuser heater safety circuit control the fuser temperature according to commands from the DC controller. The fuser consists of the following major components:

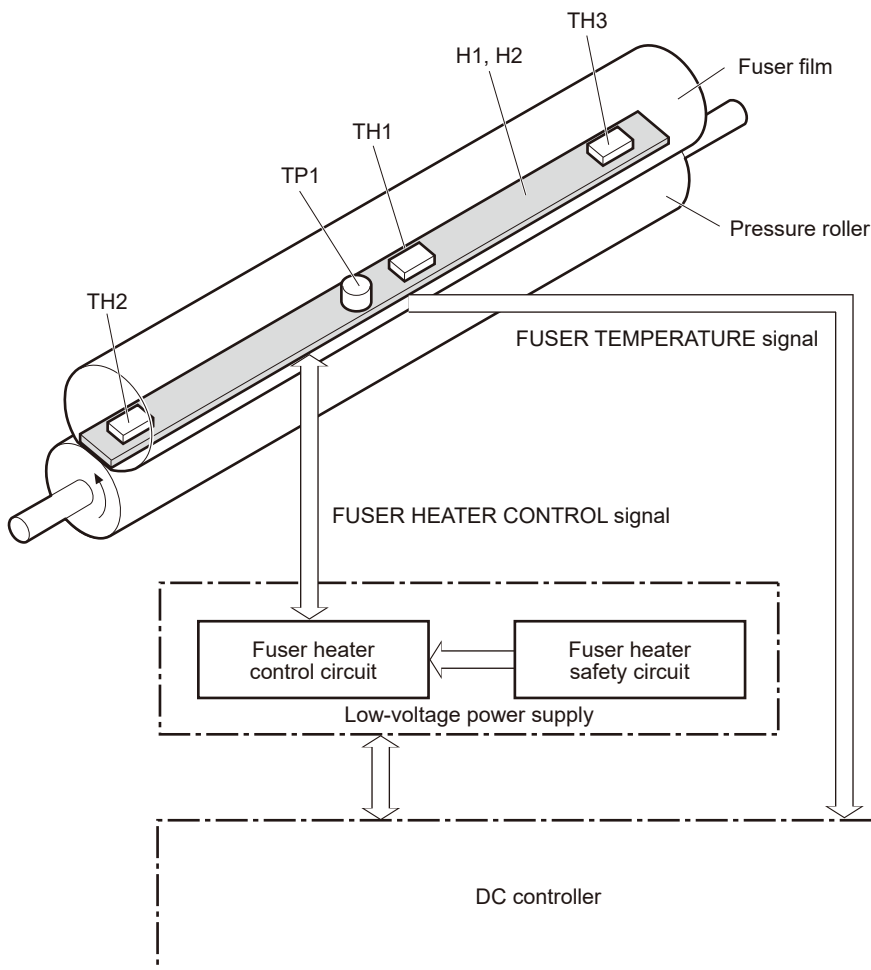


Table 1-11 Fuser components

| Type of component | Abbreviation | Name | Function |
|-------------------|--------------|-------------------|--------------------------------------|
| Heaters | H1 | Fuser main heater | Heats the center of the fuser sleeve |
| | H2 | Fuser sub-heater | Heats the edge of the fuser sleeve |

Table 1-11 Fuser components (continued)

| Type of component | Abbreviation | Name | Function |
|------------------------------------|--------------|------------------|---|
| Thermistors (Contact type) | TH1 | Main thermistor | Detects the center temperature of the fuser heater |
| | TH2 | Sub-thermistor 1 | Detects the temperature at one end of the fuser heater |
| | TH3 | Sub-thermistor 2 | Detects the temperature at one end of the fuser heater |
| Thermoswitch (Non-contact type) | TP1 | Thermoswitch | Prevents an abnormal temperature rise in the fuser heater |

Fuser control functions

The printer has the following fuser control functions.


Table 1-12 Low-voltage power supply functions

| Failure detection function | Supported feature |
|--|-------------------|
| Fuser temperature control | Yes |
| Fuser failure detection | Yes |
| Frequency detection circuit failure detection | Yes |
| Fuser pressure release mechanism failure detection | Yes |
| Fuser type discrepancy detection | Yes |
| Fuser type identification detection | No |
| Fuser presence detection | Yes |
| Fuser life detection | Yes |
| Relay failure detection | No |
| Pressure roller cleaning | Yes |

Fuser temperature control

The temperatures of the two rollers in the fuser fluctuate according to the stage of the printing process. The DC controller sends commands to the fuser-control circuit to adjust temperatures.

Figure 1-7 Fuser temperature-control circuit

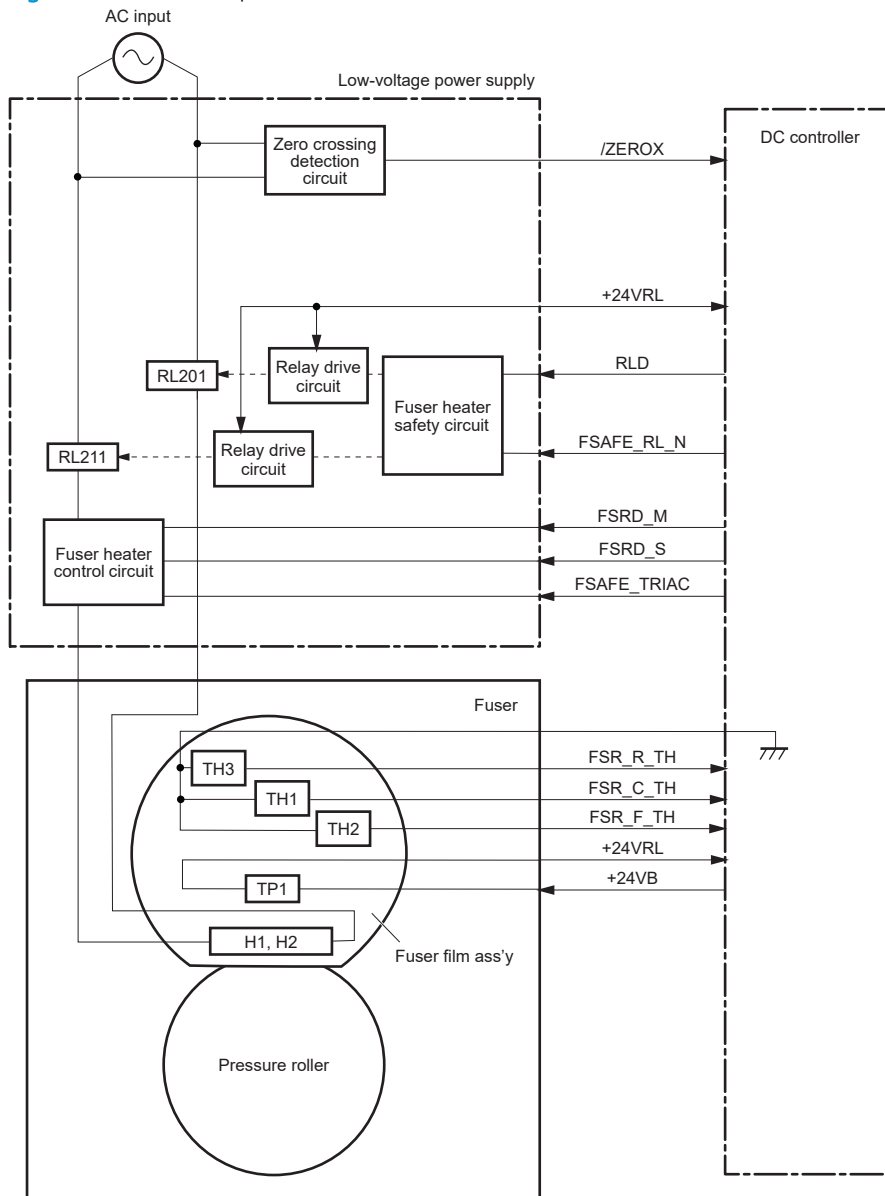

Fuser heater protection

Fuser heater protection is a feature that detects excessive temperatures in the fuser and interrupts the power supply to the fuser heater.

The following three protective components prevent the fuser heater from excessive rising temperature:

- **DC controller:** When a thermistor or sub-thermistor detects a temperature above a certain threshold, the DC controller interrupts power to the specific heater.
- **Fuser-heater safety circuit:** The fuser heater safety circuit monitors the detected temperature of the sub-thermistors.
- **Thermoswitch:** If the temperature in the heaters is abnormally high, and the temperature in the thermoswitch exceeds a specified value, the contact to the thermoswitch breaks.

Fuser unit life detection

The fuser life is tracked by fuser rotations, and not by the number of pages printed. This is a more accurate tracking method since the fuser rotates for every print job. There will be variations in fuser life depending on customer usage. Customers who are running one- and two-page intermittent jobs with long pauses between each job might reach the fuser low message sooner due to the fuser rotating more times per page than it would for larger print jobs.

Fuser identification

The printer detects the type and presence of the fuser. The DC controller notifies the formatter when it fails to detect the type (110V or 220V) or presence of the fuser.



NOTE: This printer detects if a fuser of the correct voltage for the printer is installed. If a fuser of the incorrect voltage is installed, the DC controller notifies the formatter and an error message is displayed on the control panel.


Engine laser scanner system

The laser scanner system forms the latent electrostatic image on the photosensitive drums inside each of the toner cartridges.

The DC controller receives instructions from the formatter regarding the image of the page to be printed. The DC controller signals the lasers to emit light, and the laser beams pass through lenses and onto the scanner mirror, which rotates at a constant speed. The mirror reflects the beam onto the photosensitive drum in the pattern required for the image, exposing the surface of the drum so it can receive toner.

The main components of the laser scanner system are the laser assembly and the scanner motor assembly, which are controlled by signals sent from the DC controller.

Figure 1-8 Laser scanner system

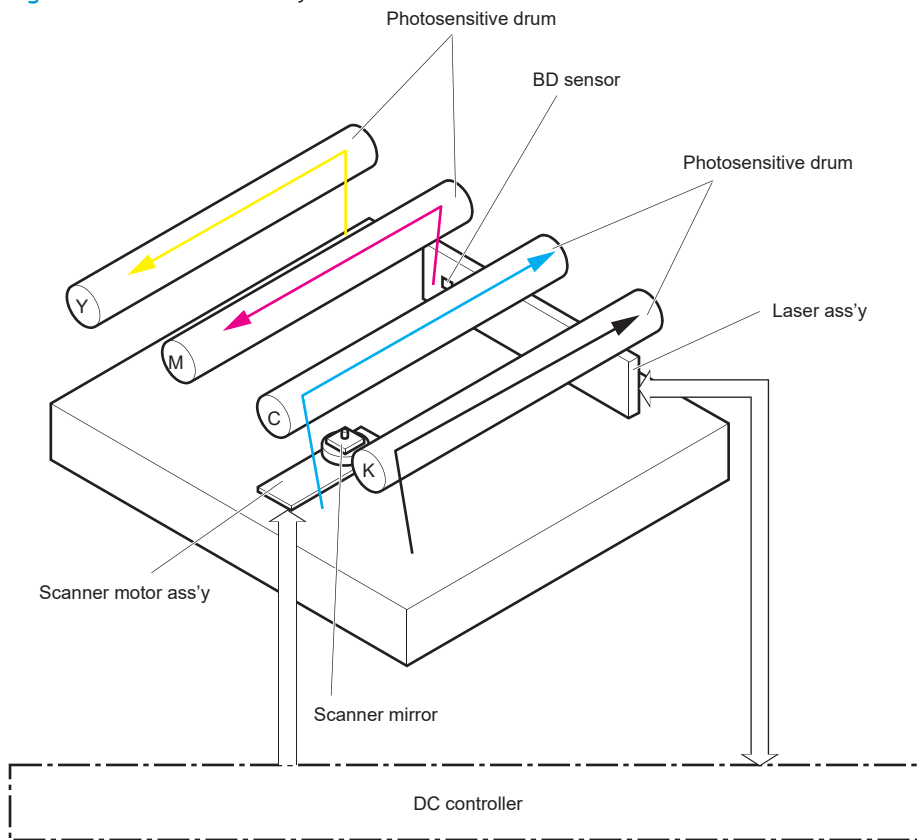

Laser scanner failure detection

The DC controller determines an optical unit failure and notifies the formatter of the error status when any of the following occurs:

- BD sensor failure detection
- **Laser scanner motor startup failure:** The scanner motor does not reach a specified rotation frequency within a specified period of time from when the laser scanner starts up.
- **Laser scanner motor abnormal rotation:** The laser scanner motor does not reach a specified rotational frequency within a specified period of time during a print operation.
- Laser scanner failure detection

For example, the control panel will show a 51.00.XX error message when a laser scanner error occurs. The control panel messages document may then be consulted for appropriate troubleshooting steps.

Safety

The laser scanner assembly has a mechanical laser shutter. For the safety of users and service technicians, the laser shutter interrupts the optical path of the laser scanner assembly when the front door (SW1/SW3) or right door (SW1/SW3) are opened.

The E65150/E65160/E67650/E67660 models have interlock switches. In case that one of the following doors opens, the interlock switches set to OFF, which stops output to the laser for the user/service technician's safety.

- Front door (SW1/SW3/SW9)
- Right door (SW1/SW3)

Image-formation process

The image-formation system creates the printed image on the paper. The system consists of the following components:

- Toner cartridges
- Intermediate transfer belt (ITB)
- Primary transfer roller
- Secondary transfer roller
- Fuser
- Laser scanner
- High-voltage power supplies

The DC Controller controls the internal components of the image formation system (according to commands received from the formatter) to form the toner image on the photosensitive drum surface. The toner image is then transferred to the print media and fused.

Figure 1-9 Image-formation system


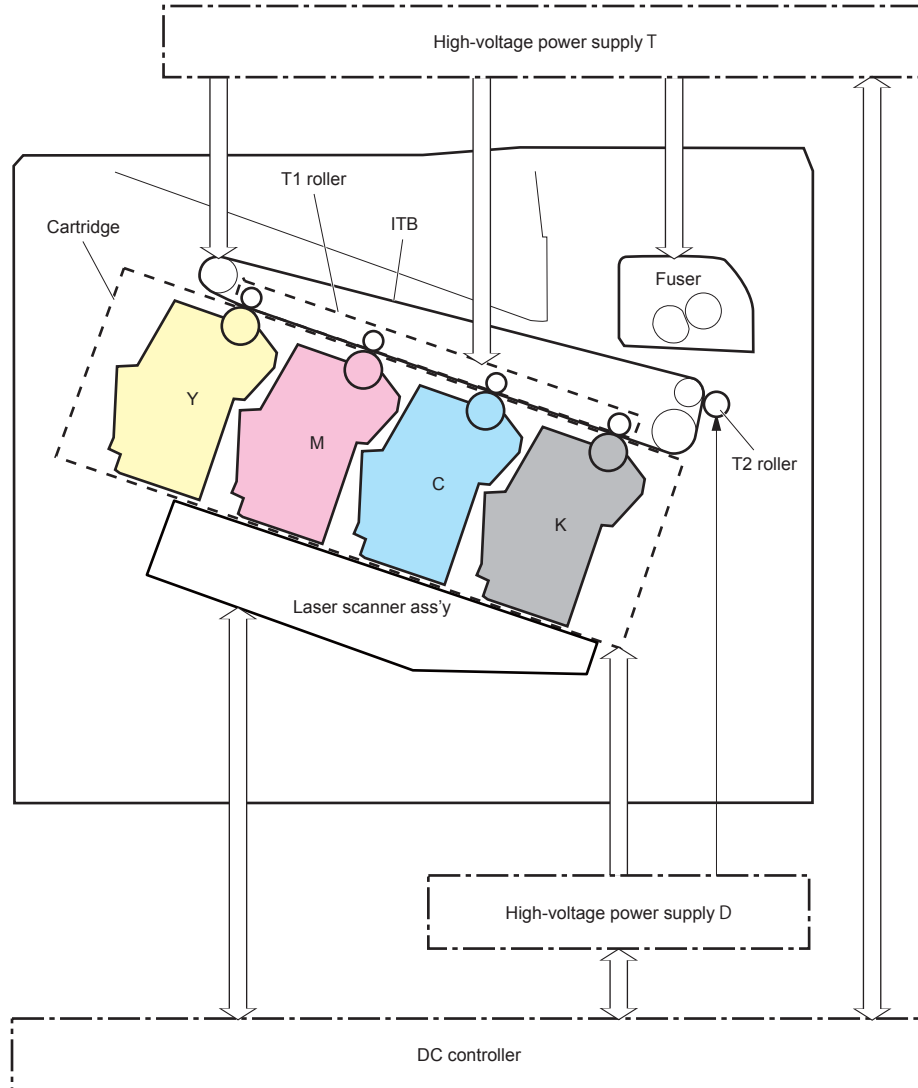


Figure 1-10 Image-formation system motors

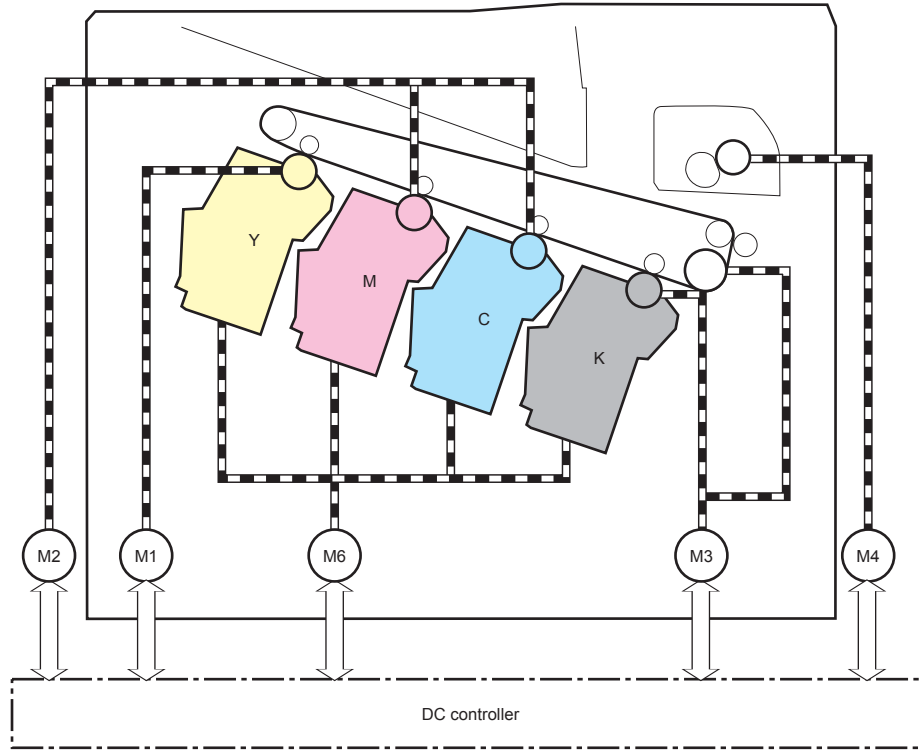

| Abbreviation | Component name |
|--------------|----------------------------|
| M1 | Drum motor 1 |
| M2 | Drum motor 2 |
| M3 | Drum motor 3 |
| M4 | Fuser motor |
| M6 | Developer alienation motor |

Figure 1-11 Image formation system sensors

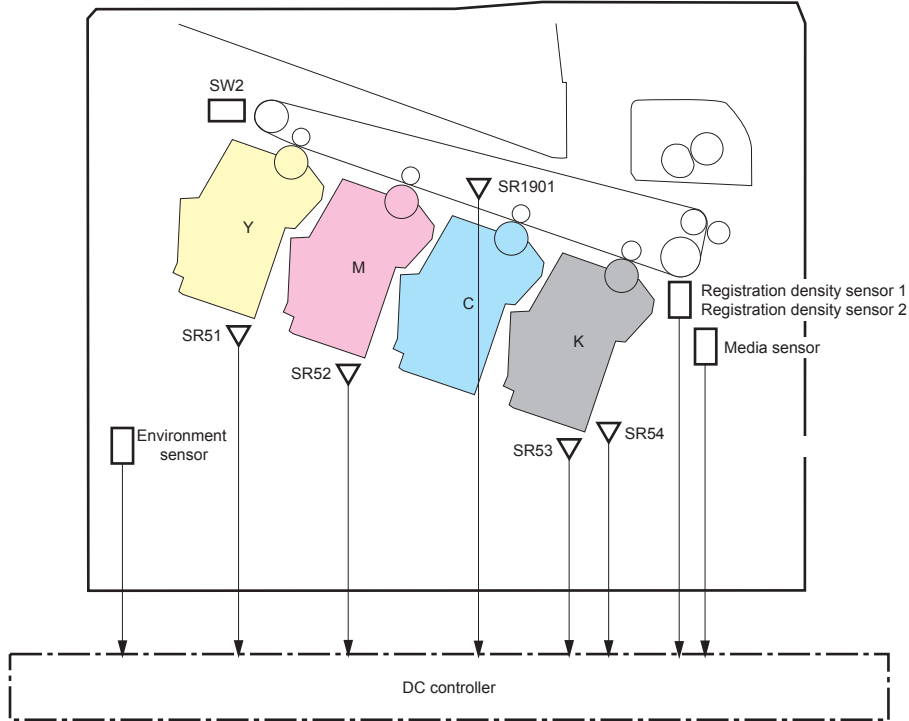


Table 1-13 Image formation system electrical component list

| Abbreviation | Component name |
|--------------|---------------------------------------|
| SW2 | ITB Toner collection near full switch |
| SR51 | Drum home position sensor Y |
| SR52 | Drum home position sensor MC |
| SR53 | Drum home position sensor K |
| SR54 | Developer alienation sensor |
| SR1901 | ITB alienation sensor |
| – | Registration density sensor 1 |
| – | Registration density sensor 2 |
| – | Environment sensor |
| – | Media sensor |

The image-formation process consists of ten steps divided into six functional blocks.

Figure 1-12 Image-formation process

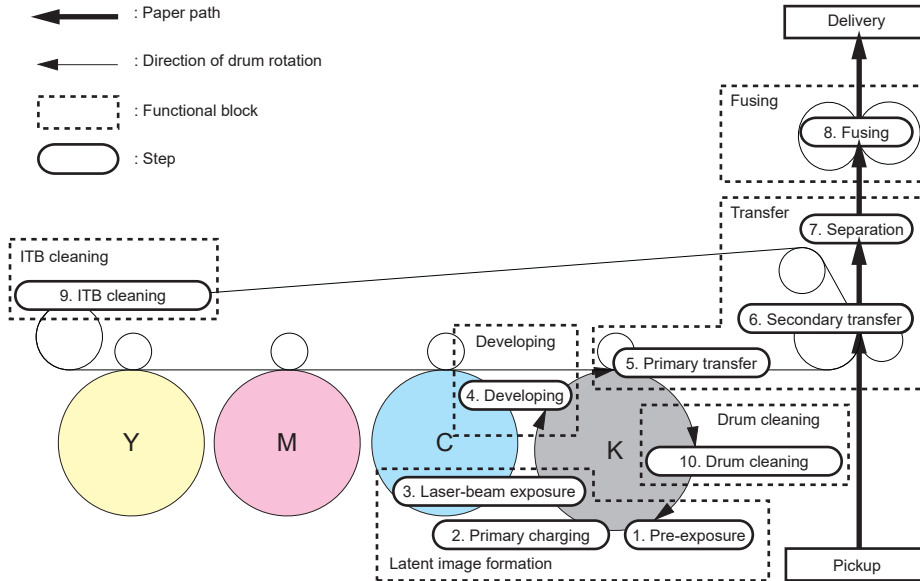



Table 1-14 Image formation process

| Functional block | Steps | Description |
|------------------------|--|--|
| Latent image formation | 1. Pre-exposure 2. Primary charging 3. Laser-beam exposure | An invisible latent image forms on the surface of the photosensitive drums. |
| Development | 4. Development | Toner adheres to the electrostatic latent image on the photosensitive drums. |
| Transfer | 5. Primary transfer 6. Secondary transfer 7. Separation | The toner image transfers to the ITB and then to the paper. |
| Fusing | 8. Fusing | The toner fuses to the paper to make a permanent image. |
| ITB cleaning | 9. ITB cleaning | Residual toner is removed from the ITB. |
| Drum cleaning | 10. Drum cleaning | Residual toner is removed from the photosensitive drums. |

Step 1: Pre-exposure

Light from the pre-exposure LED strikes the surface of the photosensitive drum to remove any residual electrical charges from the drum surface.


Figure 1-13 Pre-exposure

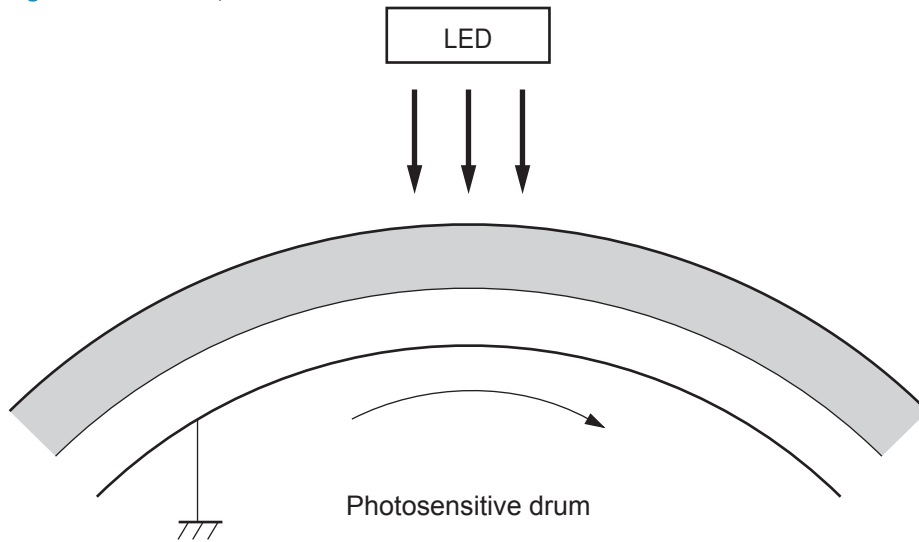

Step 2: Primary charging

The primary-charging roller contacts the photosensitive drum and charges the drum with negative potential.


Figure 1-14 Primary charging

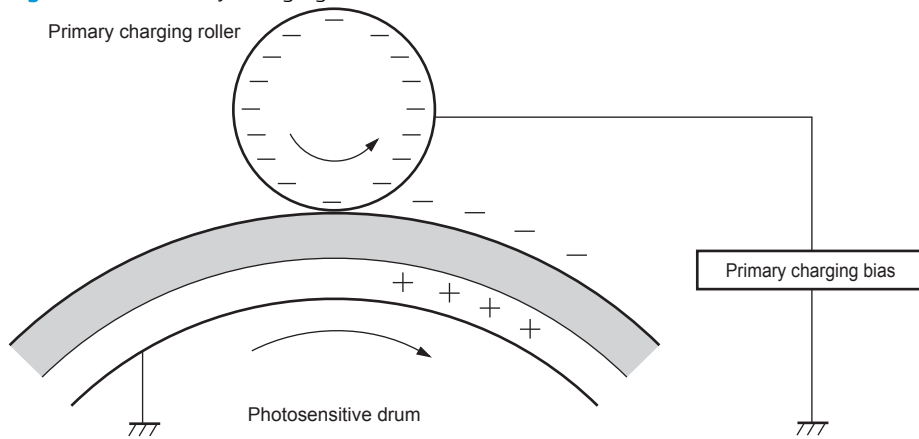

Step 3: Laser-beam exposure

The laser beam strikes the surface of the photosensitive drum in the areas where the image will form. The negative charge neutralizes in those areas, which are then ready to accept toner.


Figure 1-15 Laser-beam exposure

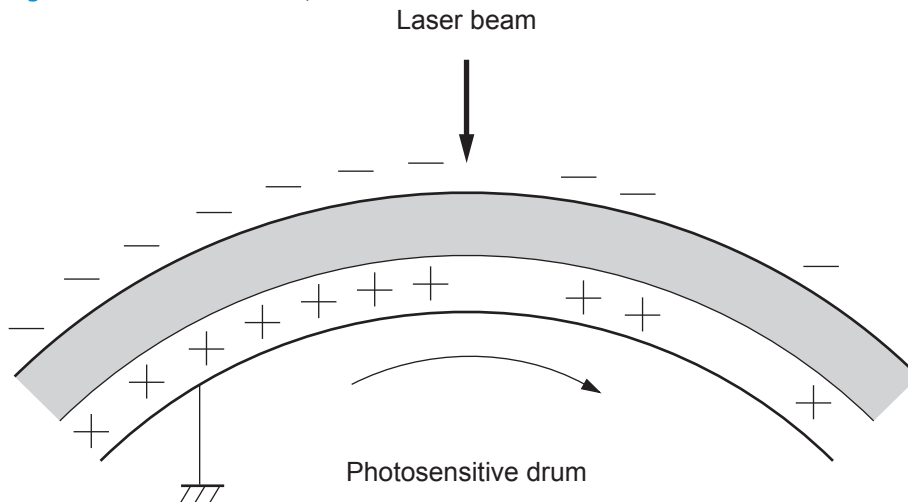

Step 4: Development

Toner acquires a negative charge as the developing cylinder contacts the developing blade. Because the negatively-charged surface of the photosensitive drums have been neutralized where they have been struck by the laser beam, the toner adheres to those areas on the drums. The latent image becomes visible on the surface of each drum.


Figure 1-16 Development

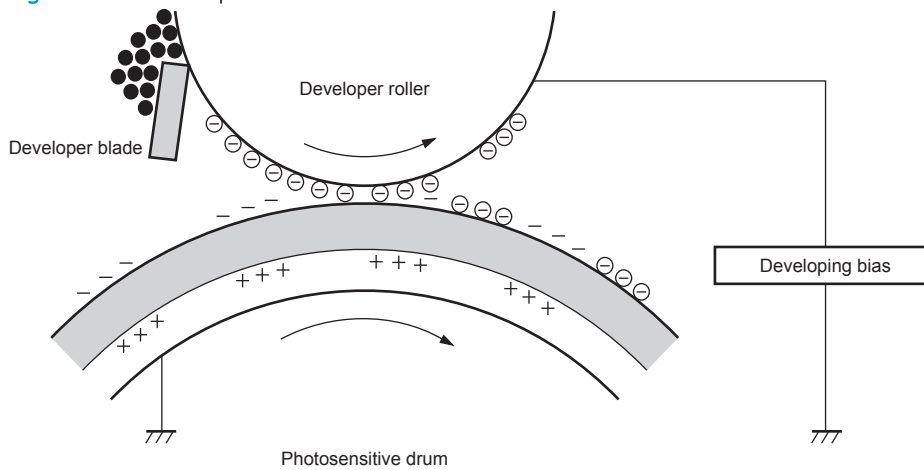

Step 5: Primary transfer

The positively-charged primary-transfer rollers contact the ITB, giving the ITB a positive charge. The ITB attracts the negatively-charged toner from the surface of each photosensitive drum, and the complete toner image transfers onto the ITB.


Figure 1-17 Primary transfer

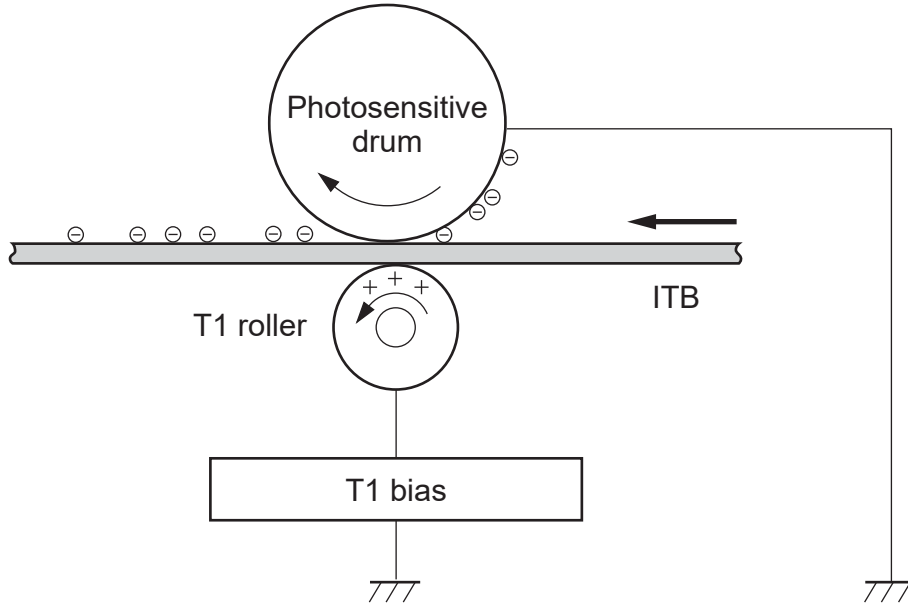

Step 6: Secondary transfer

The paper acquires a positive charge from the secondary-transfer roller, and attracts the negatively-charged toner from the surface of the ITB. The complete toner image transfers onto the paper.


Figure 1-18 Secondary transfer

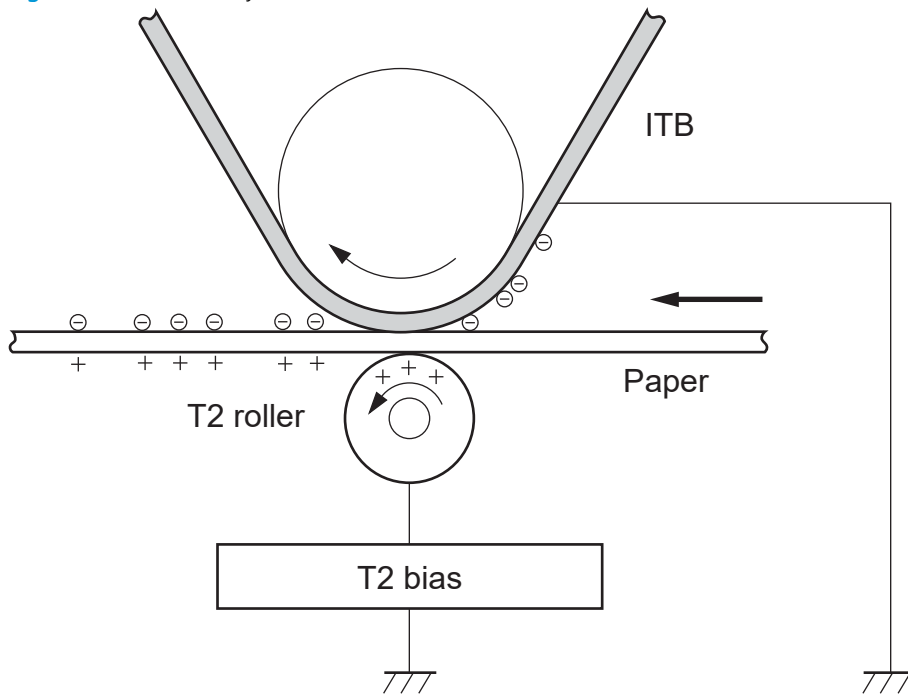

Step 7: Separation

The stiffness of the paper causes it to separate from the ITB as the ITB bends. The static-charge eliminator removes excess charge from the paper to make sure that the toner fuses correctly.


Figure 1-19 Separation

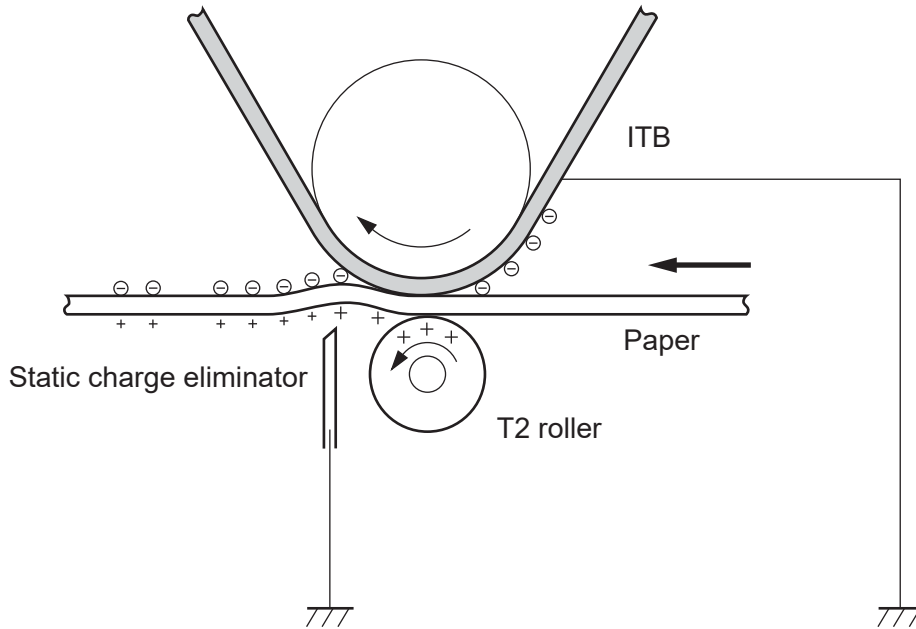

Step 8: Fusing

To create the permanent image, the paper passes through heated, pressurized rollers to melt the toner onto the page. Fusing bias is added to the pressure roller to improve the print quality.


Figure 1-20 Fusing

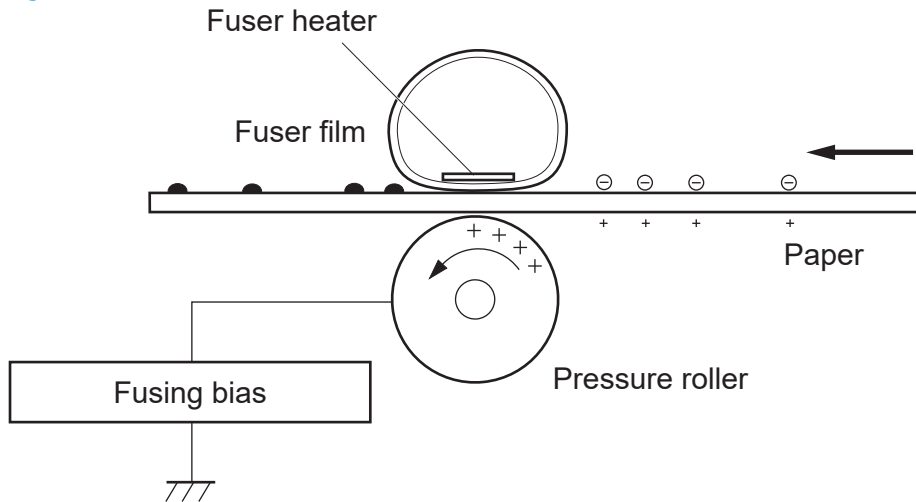

Step 9: ITB cleaning

The cleaning blade scrapes the residual toner off the surface of the ITB. The residual toner feed screw deposits residual toner in the toner collection unit. The residual toner which cannot be removed by the cleaning blade is charged by the ITB cleaning brush, and then transferred from the ITB surface to the photosensitive drum by the primary transfer (T1) roller.


Figure 1-21 ITB Cleaning

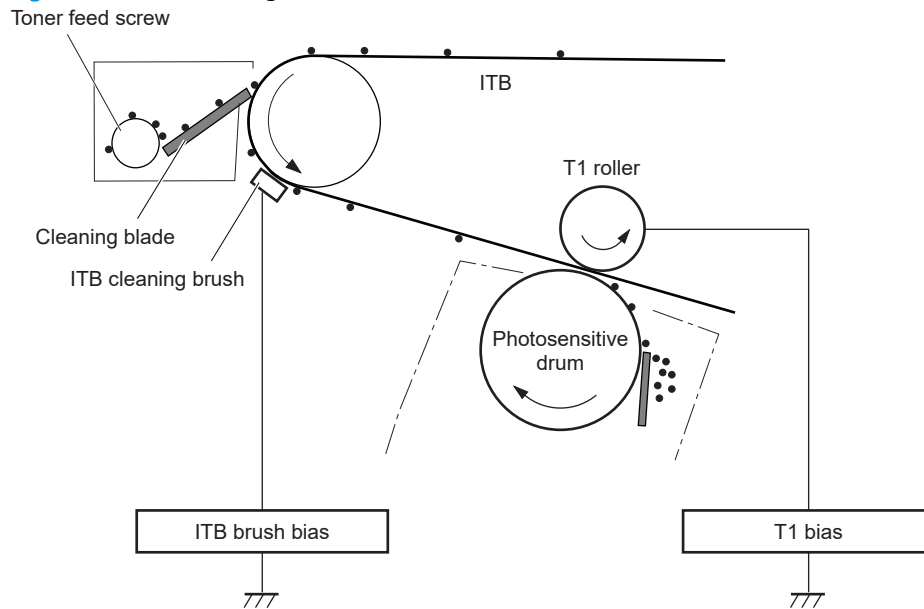

Step 10: Drum cleaning

The cleaning blade scrapes the residual toner off the surface of the photosensitive drum. The toner feed screw deposits the residual toner in the toner collection unit.

Figure 1-22 Drum cleaning

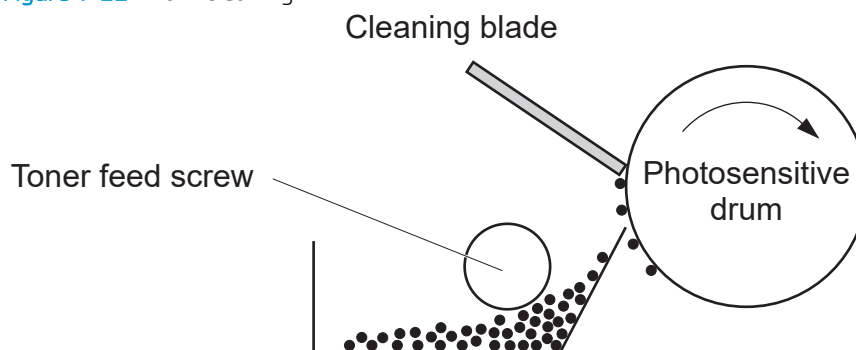

Toner cartridges

The printer has four toner cartridges, one for each color: cyan, magenta, yellow, and black.

Design

Each toner cartridge is filled with toner and consists of the following components:

- Photosensitive drum
- Developer roller
- Primary-charging roller
- Memory chip

The DC controller rotates the drum motor to drive the photosensitive drum, developer roller, and the primary-charging roller.

Figure 1-23 Toner cartridge system

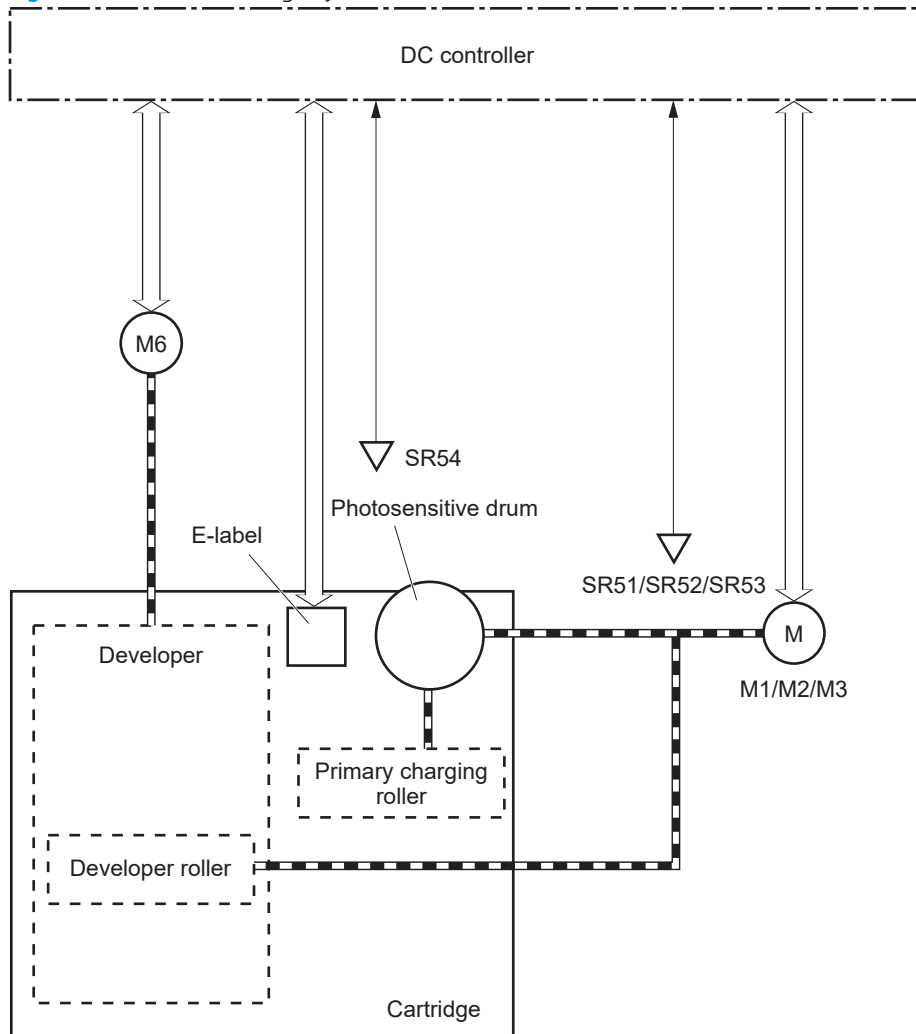


Table 1-15 Toner cartridge functions

| Function | Applied |
|----------|---------|
|----------|---------|

Table 1-15 Toner cartridge functions (continued)

| | |
|--|-----|
| Cartridge presence detection | Yes |
| Toner level detection | Yes |
| Cartridge life detection | Yes |
| Cartridge mis-installation detection | Yes |
| Developer alienation control | Yes |
| Developer alienation motor failure detection | Yes |
| Drum discharge mechanism | No |

Memory chip

The memory chip is non-volatile memory that stores information about the usage of the toner cartridge and helps protect the customer from counterfeit cartridges. This chip is also used to detect the presence of a cartridge within the printer or when a cartridge is installed in the wrong slot. The printer reads and writes the data in the memory chip.

Dynamic security

Certain HP printers use cartridges that have security chips or electronic circuitry. Cartridges using a non-HP chip or modified or non-HP circuitry* might not work. And, those that work today might not work in the future.

As is standard in the printing business, HP has a process for authenticating cartridges. HP continues to use security measures to protect the quality of our customer experience, maintain the integrity of our printing systems, and protect our intellectual property. These measures include authentication methods that change periodically and might prevent some third-party supplies from working now or in the future. HP printers and original HP cartridges deliver the best quality, security and reliability. When cartridges are cloned or counterfeited, the customer is exposed to quality and potential security risks, compromising the printing experience.

* Non-HP chips and modified or non-HP electronic circuitry are not produced or validated by HP. HP cannot guarantee that these chips or circuitry will work in your printer now or in the future. If you are using a non-original HP cartridge, please check with your supplier to ensure your cartridge has an original HP security chip or unmodified HP electronic circuitry.

JetIntelligence

JetIntelligence supports two features for managing toner cartridges.

- The authentication feature allows customers to specify the use of only genuine HP toner cartridges in the printer.
- The anti-theft feature enables locking a cartridge to a specific printer or fleet of printers.

Authentication

The genuine HP authentication feature allows a customer to specify that only genuine HP supplies can be used in a printer. If a non-HP or used supply is installed, the printer will not print. This feature is disabled by default, and can be enabled or disabled from the control panel or the Embedded Web Server (EWS).

If a genuine HP toner cartridge from another printer is moved to a printer with this feature enabled, the toner cartridge will authenticate and print, unless the toner cartridge has passed the low state. If the toner cartridge has passed the low state, an **Unauthorized Cartridge** message displays on the control panel.

If a non-HP toner cartridge is used in a printer with this feature enabled, the message **Unauthorized Cartridge** appears on the control-panel display.



NOTE: If a customer suspects they have a counterfeit cartridge, they should report it by going to www.hp.com/go/anticounterfeit and selecting **Report now**.

Anti-theft

The toner cartridge anti-theft feature allows a customer to configure the printer to automatically lock genuine HP toner cartridges to a specific printer or fleet of printers when they are installed. A locked toner cartridge will only work in the specified printer or fleet of printers. This feature prevents toner cartridges from being stolen and used in another printer, or from being moved from an authorized printer to an unauthorized printer. This

feature is disabled by default, and can be enabled or disabled from the control panel, the Embedded Web Server (EWS), or Web Jetadmin.

When the anti-theft feature is enabled, the toner cartridge in a printer will only work in the specified printer or fleet of printers. If a locked toner cartridge is moved to another printer, the cartridge will not print and the message **Protected Cartridge** appears on the control-panel display.

 **NOTE:** When a toner cartridge is locked to a specific printer or fleet of printers, it cannot be unlocked. This is a permanent operation.

Toner seal

The toner cartridge seal is opened automatically when the toner cartridge is installed into the printer.

Toner level and cartridge life detection

Toner level detection: The DC controller detects the remaining toner in the cartridge by the optical detection method and then notifies the formatter of the remaining toner level.


Cartridge life detection: Cartridge life detection is measured in two ways.

1. Toner level:
 - For the first 75% of cartridge life, toner level is measure through pixel counting by the DC controller. Once the level reaches 25%, the toner level sensor utilizes electrical properties to determine the amount of toner remaining.
2. Rotations of internal components (OPC and developer roller):
 - The DC controller monitors these two life parameters and reports them to the formatter as percent life remaining. End of cartridge life is determined by the lower value of the two.

Developing unit engagement and disengagement control

The printer can print in full-color mode or in black-only mode. To print in black-only mode, the printer disengages the developing rollers in the cyan, magenta, and yellow toner cartridges, which maximizes the life of the cartridges.

Figure 1-24 Developer roller engagement and alienation control

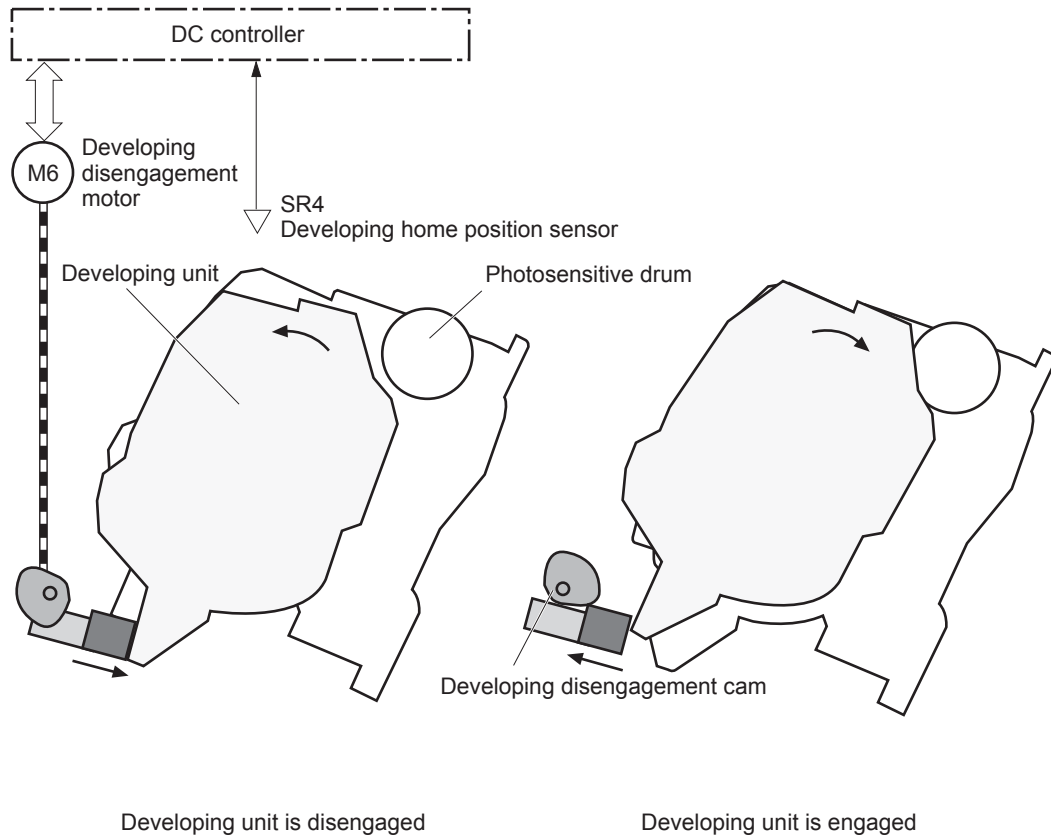

The developer roller engagement and alienation control operates as follows: When the printer is turned on and when each print job is completed, all four of the developing units are disengaged from the photosensitive drums.

- The drive of the developer alienation motor rotates the developer alienation cam.
- As the cam rotates, the developing unit engages with or separates from the photosensitive drum.

When the print mode is full color, the developing units engage with the drums. When the print mode is black-only, only the black developing unit engages with the drum.

The DC controller determines a developer alienation motor failure and notifies the formatter when it does not detect a specified signal from the developer alienation sensor during the developing unit engagement and disengagement operation.

Intermediate transfer belt (ITB) unit

The ITB unit accepts the toner images from the photosensitive drums and transfers the completed image to the paper. The ITB unit has the following main components:

- Intermediate transfer belt (ITB)
- ITB-drive roller
- Primary-transfer roller
- ITB cleaner

Drum motor 3 drives the ITB drive roller, which rotates the ITB. The motion of the ITB causes the primary transfer rollers to rotate. The ITB cleaner cleans the ITB surface.

Figure 1-25 ITB Unit

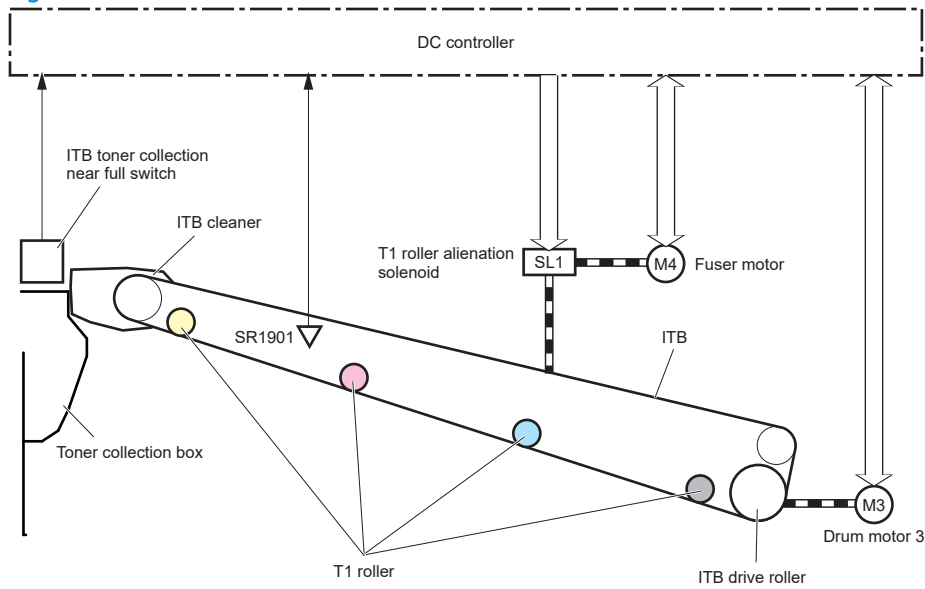


Table 1-16 ITB assembly functions

| Function | Applied |
|--|---------|
| T1 roller alienation control | Yes |
| T1 roller alienation mechanism failure detection | Yes |
| ITB ass'y life detection | Yes |
| ITB ass'y presence detection | No |
| Blade cleaning mechanism | Yes |
| Electrostatic cleaning mechanism | Yes |
| ITB toner collection box full detection | Yes |
| ITB toner collection box presence detection | No |
| ITB perimeter detection | Yes |
| ITB seal detection sensor failure detection | No |


Primary-transfer roller engagement and disengagement control

Depending on the requirements of the print job, the primary-transfer rollers engage with the ITB so it can receive toner from the photosensitive drums. The primary-transfer rollers have three engagement states.

Table 1-17 Primary-transfer roller engagement states

| | |
|------------------------|---|
| All rollers disengaged | The ITB is disengaged from all the four photosensitive drums. This state is the home position for the ITB unit. |
| All rollers engaged | The ITB is engaged with all four photosensitive drums. This is the state for full-color printing. |
| Black roller engaged | The ITB is engaged with only the black photosensitive drum. This is the state for black-only printing. |

Figure 1-26 Three states of primary-transfer roller engagement and disengagement

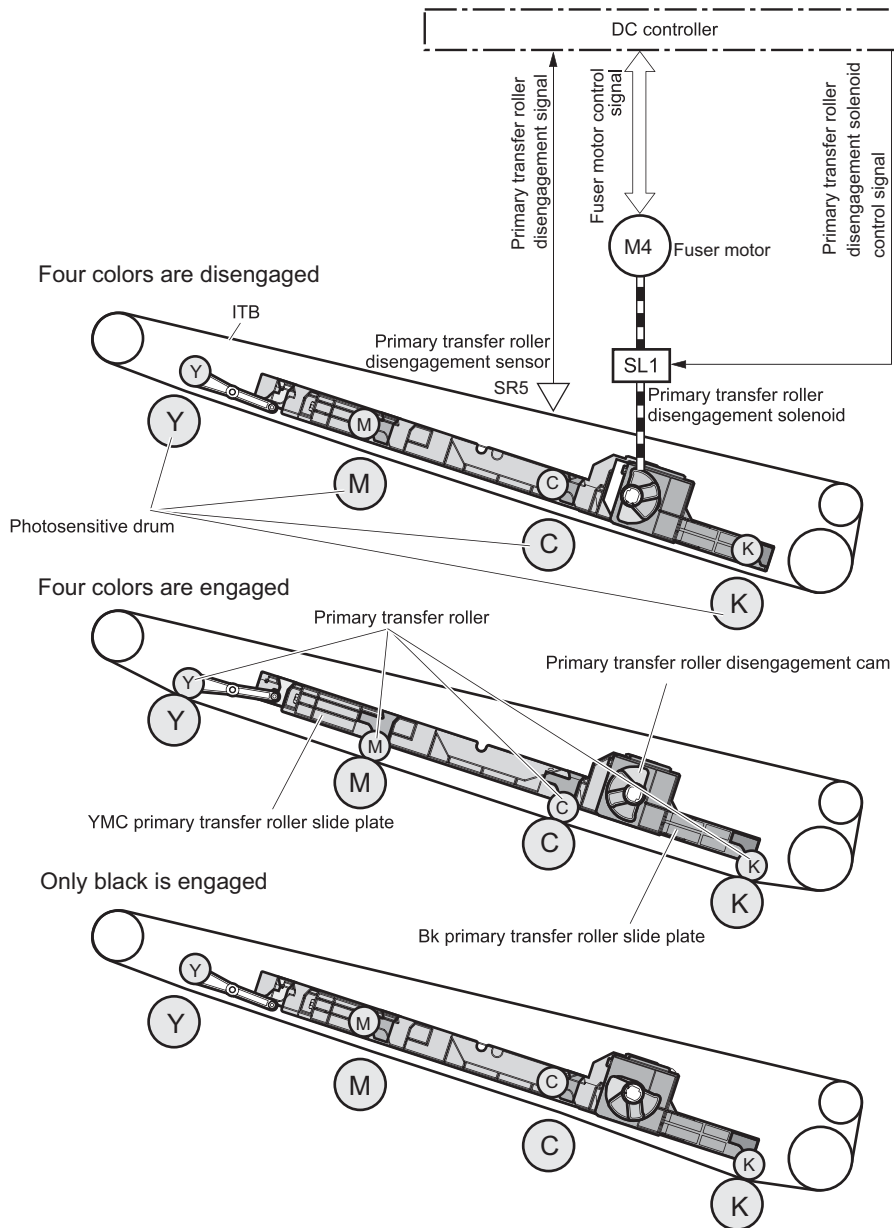

The primary-transfer-roller disengagement motor rotates or reverses to place the primary-transfer-roller disengagement cam into one of three positions. The cam causes the transfer-roller slide plate to move to the right or left. This movement causes the primary-transfer rollers to move up to engage the ITB with the photosensitive drum or down to disengage it.

The DC controller expects to receive a signal from the ITB home-position sensor when the primary-transfer-roller engages or disengages. If the DC controller does not receive this signal, but detects that the primary-transfer-roller disengagement motor is rotating, the DC controller determines that the primary-transfer-disengagement mechanism has failed, and notifies the formatter. The formatter will then display a **59.00.F0** message on the control panel.

ITB unit detection


The DC controller monitors several signals from the ITB unit to detect status.

| | |
|-----------------------------|---|
| ITB unit life detection | <p>The DC controller detects whether the ITB unit is new by monitoring the new ITB unit sensor. The DC controller determines the ITB unit is at end of life and notifies the formatter when a specified number of pages are printed after the ITB unit is replaced. If swapping ITB units between two printers for troubleshooting purposes, be sure to return the ITB units to their original printers to maintain the correct life count.</p> |
| ITB unit presence detection | <p>NOTE: When installing a new ITB, refer to the instructions for resetting the ITB life counter in the installation guide provided with the replacement part.</p> <hr/> <p>The DC controller detects the presence of an ITB unit by monitoring the primary-transfer roller disengagement sensor. The DC controller turns on the primary-transfer disengagement solenoid for specified times during an initial rotation period when the following events occur:</p> <ul style="list-style-type: none"><li data-bbox="742 680 991 701">• The printer is turned on<li data-bbox="742 730 1034 751">• The printer exits sleep mode<li data-bbox="742 781 948 802">• The door is closed <p>The DC controller determines the absences of an ITB unit and notifies the formatter when it does not detect a specified signal from the new primary-transfer roller disengagement sensor.</p> |

ITB cleaning mechanism

The cleaning blade in the ITB cleaner scrapes the residual toner off the ITB surface and deposits the residual toner into the toner collection unit. The residual toner feed screw deposits the residual toner to the residual toner feed unit. The ITB motor and the residual toner feed motor drive the screw. The residual toner that cannot be removed by the cleaning blade is charged by the ITB cleaning brush, and then transferred from the ITB surface to the photosensitive drum by the primary transfer (T1) roller. The DC controller detects whether the toner collection unit is full by using the toner collection unit full sensor, and then notifies the formatter.

Figure 1-27 ITB cleaning process

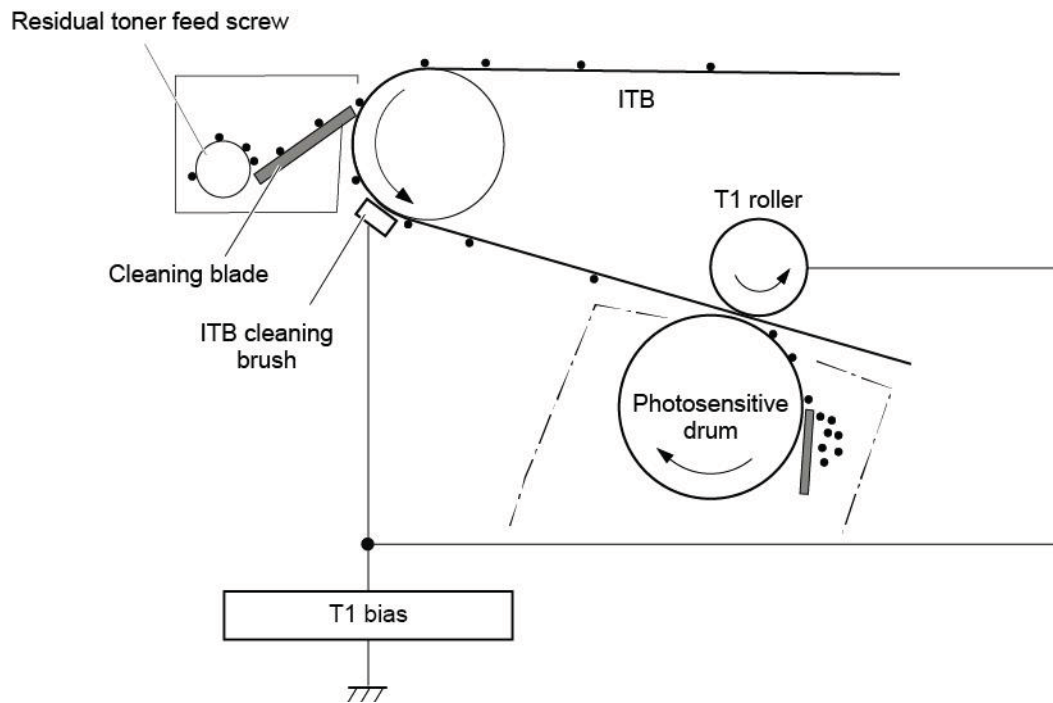

Secondary transfer roller functions

The secondary transfer roller transfers the image from the ITB onto the paper.

The printer has the following secondary transfer roller functions.

Table 1-18 Secondary transfer roller functions

| Function | Supported feature |
|--|-------------------|
| Secondary transfer roller cleaning mechanism | Yes |
| Secondary transfer roller presence detection | No |
| Secondary transfer roller life detection | No |
| Secondary transfer roller alienation control | Yes |

Calibration

The printer calibrates itself to maintain proper print quality. The calibration corrects color-misregistration and color-density variation due to environmental changes or internal variation in the printer.

The printer has the following calibration functions.

Table 1-19 Calibration functions

| Function | Supported feature |
|---|-------------------|
| Color-plane registration correction control | Yes |
| Environment correction control | Yes |
| Image density control (DMAX) | Yes |
| Image halftone control (DHALF) | Yes |
| Registration density sensor failure detection | Yes |
| Color sensor control | No |
| Gray axis control (GAS) | No |
| Environment sensor failure detection | Yes |

Pickup, feed, and delivery system

The DC controller controls the pickup, feed, and delivery system according to commands from the formatter. The pickup, feed, and delivery system uses a series of rollers to move the paper through the printer.

The pickup, feed, and delivery system consists of the following three functional blocks. The DC controller controls each block to pick up, feed and deliver the paper.

- **Pickup-and-feed-block:** Controls the movement of the paper from each pickup source to the fuser inlet
- **Fuser-and-delivery-block:** Controls the movement of the paper from the fuser to the delivery destination
- **Duplex block:** Controls the movement of the paper from the duplex switchback unit to the duplex re-pickup unit.

Figure 1-28 Pickup, feed, and delivery system

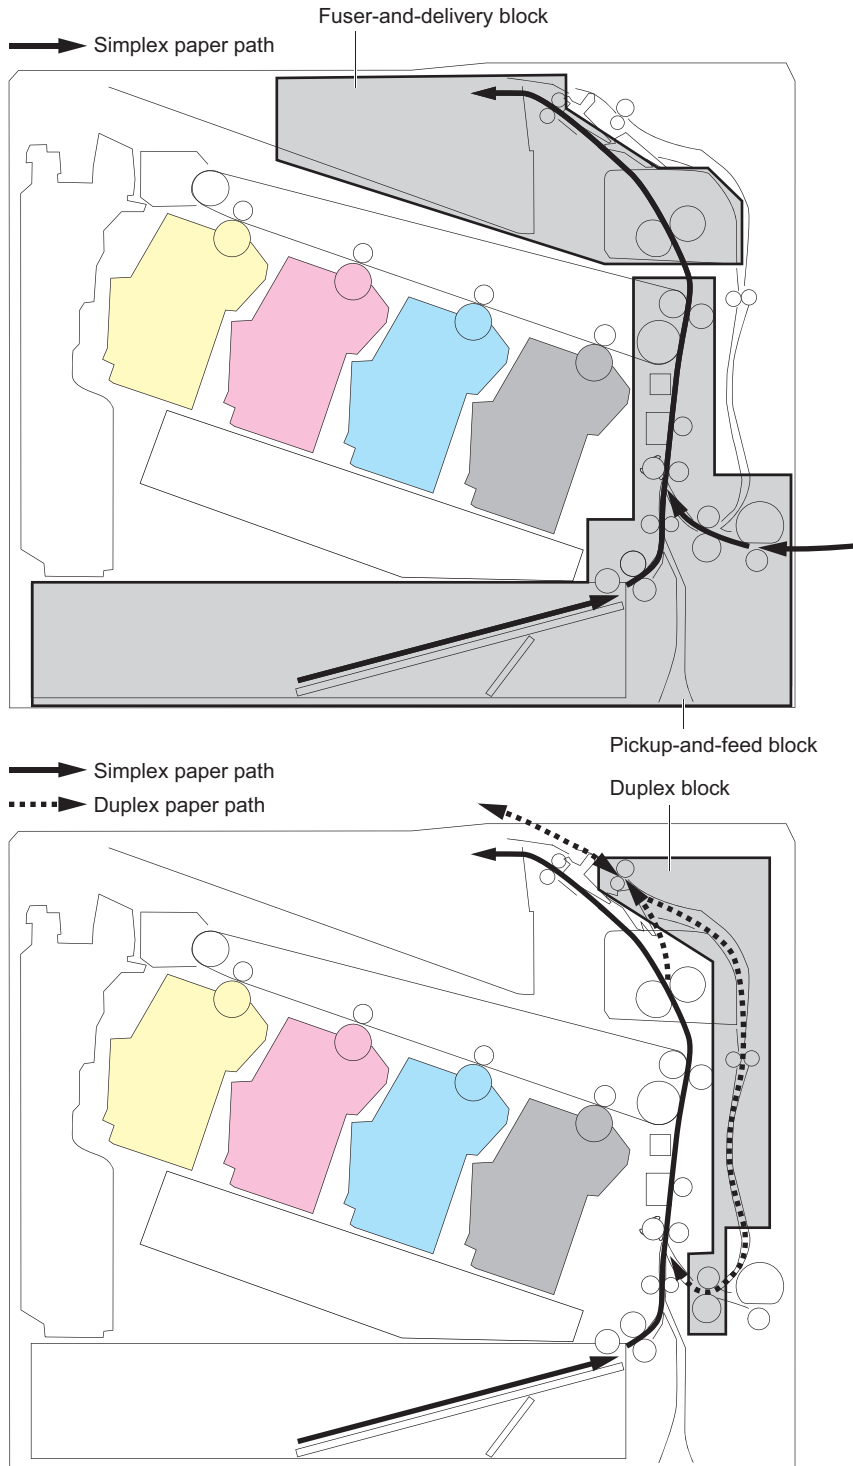


Photo sensors and switches

The following figure shows the sensors and switches for the pickup, feed, and delivery system.

Figure 1-29 Pickup, feed, and delivery system photo sensors and switches

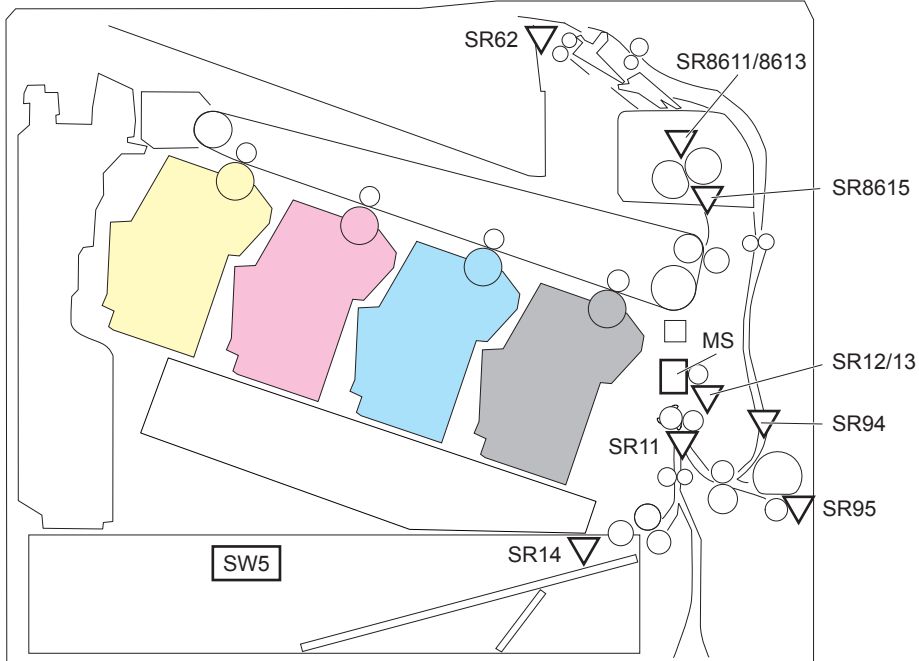


Table 1-20 Photo sensors and switches

| Abbreviation | Component name |
|--------------|-----------------------------------|
| SR11 | Registration sensor |
| SR12 | Registration media width sensor 1 |
| SR13 | Registration media width sensor 2 |
| SR14 | Tray 2 media out sensor |
| SR62 | FD1 media full sensor |
| SR94 | Duplex feed sensor |
| SR95 | Tray 1 media out sensor |
| SR8611 | Fuser output sensor 1 |
| SR8613 | Fuser output sensor 2 |
| SR8615 | Fuser loop sensor |
| SW5 | Tray 2 media size switch 1 |
| MS | Media sensor |

Motors, clutches, and solenoids

The following figure shows the motors, clutches, and solenoids for the pickup, feed, and delivery system.

Figure 1-30 Pickup, feed, and delivery system motors, clutches, and solenoids

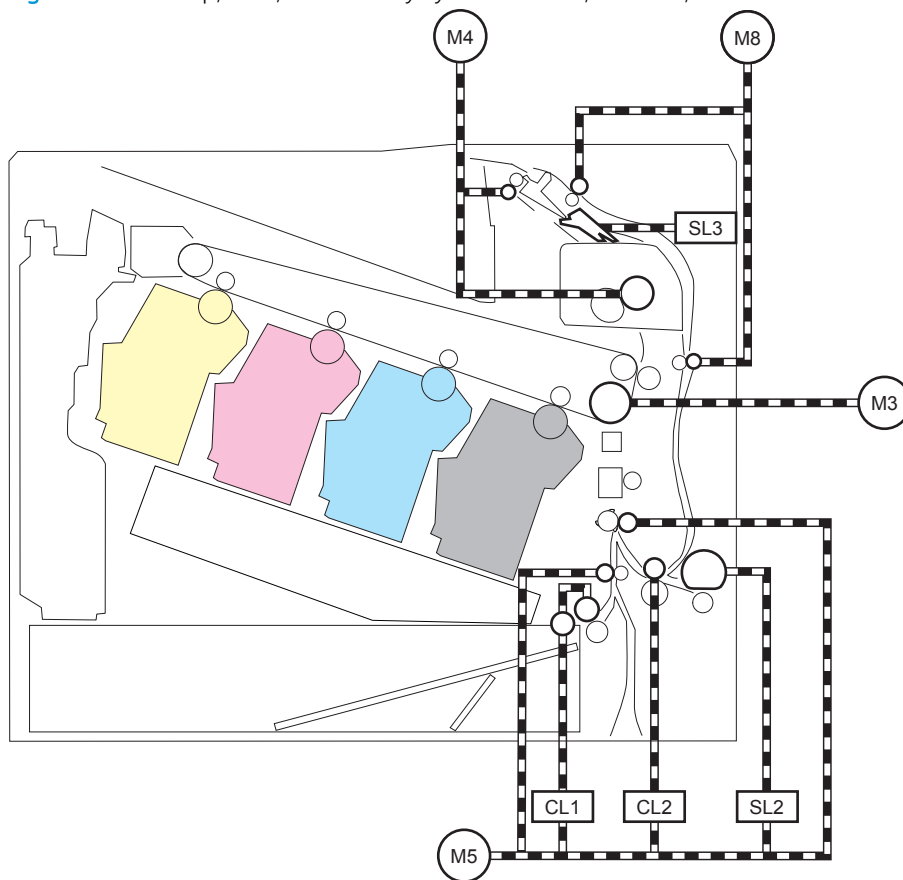


Table 1-21 Motors, clutches, and solenoids

| Abbreviation | Component | Replacement part number |
|--------------|-------------------------|--|
| M3 | Drum motor 3 | Drum motor assembly (RM2-1956-000CN) |
| M4 | Fuser motor | Fuser motor assembly (RM2-1955-000CN) |
| M5 | Pickup motor | Paper pickup assembly (RM2-6556-000CN) |
| M8 | Duplex reverse motor | Right door assembly (RM2-6622-000CN) |
| SL2 | Tray 1 pickup solenoid | Right door assembly (RM2-6622-000CN) |
| SL3 | Duplex reverse solenoid | Right door assembly (RM2-6622-000CN) |
| CL1 | Tray 2 pickup clutch | Lifter drive assembly (RM2-6669-000CN) |
| CL2 | Duplex re-pickup clutch | Right door assembly (RM2-6622-000CN) |

Paper trays

Tray 2 media type detection


The printer selects the optimal print mode based upon the media type detected by the media sensor. The media sensor consists of an optical sensor, which detects the surface texture of the paper, and an ultrasonic sensor, which measures the thickness of the paper. The formatter informs the DC controller that the printer is in auto-sense mode and the DC controller changes the fuser mode based on media type.

Following are the print modes detected by the printer:

- Normal
- Heavy media 1
- Heavy media 2
- Heavy media 3
- Light media 1
- Light media 2
- Light media 3
- Glossy media 1
- Glossy media 2
- Glossy media 3
- Glossy
- OHT
- Designated media 1
- Designated media 2
- Designated media 3

The DC controller determines a media sensor error and reports it to the formatter when the value detected by the media sensor is out of a specified range of values.

Figure 1-31 Media sensors

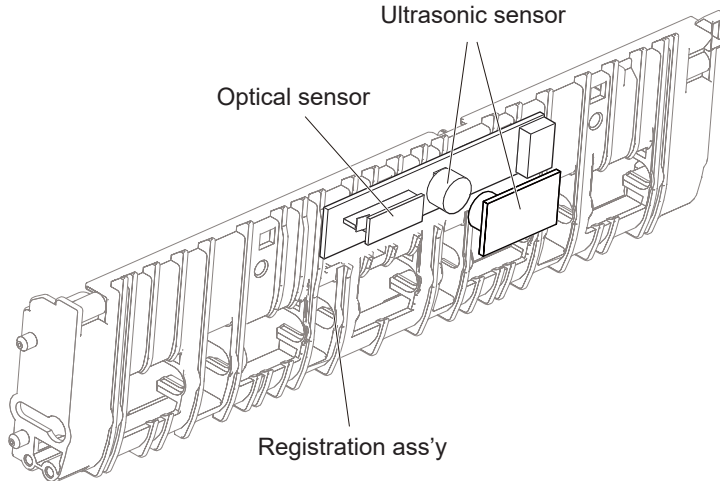

Feed speed control

The DC controller adjusts the feed speed to improve the print quality depending on the paper type. The paper is fed at a specified speed according to the print mode designated by the formatter.

Table 1-22 Print mode and feed speed

| Print mode | Feed speed ¹ | | Media sensor detection |
|----------------|-------------------------|------------|------------------------|
| | Full color | Monochrome | |
| Auto | - | - | Yes |
| Normal | 1/1 | 1/1 | Yes |
| Heavy media 1 | 3/4 | 3/4 | No |
| Heavy media 2 | 1/2 | 1/2 | Yes |
| Heavy media 3 | 1/3 | 1/3 | Yes |
| Light media 1 | 1/1 | 1/1 | Yes |
| Light media 2 | 1/1 | 1/1 | Yes |
| Light media 3 | 1/2 | 1/2 | Yes |
| Glossy media 1 | 1/3 | 1/3 | Yes |
| Glossy media 2 | 1/3 | 1/3 | Yes |
| Glossy media 3 | 1/3 | 1/3 | Yes |
| Glossy film | 1/3 | 1/3 | Yes |
| Photo media 1 | - | - | No |
| Photo media 2 | - | - | No |
| Photo media 3 | - | - | No |
| Envelope 1 | 1/3 | 1/3 | No |
| Envelope 2 | - | - | No |
| Envelope 3 | - | - | No |

Table 1-22 Print mode and feed speed (continued)

| Print mode | Feed speed ¹ | | Media sensor detection |
|--------------------|-------------------------|------------|------------------------|
| | Full color | Monochrome | |
| OHT | 1/3 | 1/3 | Yes |
| Label | 1/2 | 1/2 | No |
| Designated media 1 | 1/2 | 1/2 | No |
| Designated media 2 | 1/3 | 1/3 | No |
| Designated media 3 | 3/4 | 3/4 | No |

1/1 speed = 210 mm/s

1/2 speed = 105 mm/s

1/3 speed = 70 mm/s

Table 1-23 Pickup, feed and delivery system functions

| Function | Supported |
|---|-----------|
| Tray 2 media size detection | Yes |
| Tray 2 presence detection | Yes |
| Tray 2 media surface detection | No |
| Tray 2 media presence detection | Yes |
| Tray 2 media level detection | No |
| Tray 2 lift-up control | Yes |
| Tray 2 lift-down control | No |
| Tray 2 multiple-feed prevention mechanism | Yes |
| Tray 1 media presence detection | Yes |
| Tray 1 media width detection | No |
| Tray 1 last-media detection | No |
| Skew-feed prevention mechanism | Yes |
| Feed speed control | Yes |
| Loop control | Yes |
| Media detection | Yes |
| OHT detection | Yes |
| Image leading edge positioning | Yes |
| Media length detection | Yes |
| Media width detection | Yes |
| Pressure roller pressure release control | Yes |
| Output bin media-full detection | Yes |
| Automatic delivery | Yes |

Table 1-23 Pickup, feed and delivery system functions (continued)

| Function | Supported |
|---------------------------|-----------|
| Duplex switchback control | Yes |
| Duplex feed control | Yes |

Duplexing unit

The duplexing unit reverses the paper and feeds it through the paper path to print the second side.

Duplexing reverse and duplex feed control

The duplex reverse control reverses the paper after the first side is printed and feeds it to the duplex re-pickup position to print the second side of the page.

1. At a specified time after the first side of a page is printed, the duplex reverse motor rotates, and the duplex reverse solenoid is turned on.
2. The duplex flapper moves, and the paper feeds to the duplex reverse unit.
3. After a specified period of time, the duplex reverse motor reverses, and the paper feeds to the duplex feed unit.
4. The duplex reverse motor and the pickup motor move the paper to the duplex re-pickup position.
5. The duplex reverse motor and the duplex feed clutch stop, and the paper feed operation pauses.
6. After a specified period of time, the duplex reverse motor rotates, and the duplex feed clutch is turned on. The paper is then picked up again.


Jam detection/prevention

The printer uses the following sensors to detect the paper as it moves through the paper path and to report to the DC controller if the paper has jammed.

- Registration sensor (SR11)
- Registration media width sensor 1 (SR12)
- Registration media width sensor 2 (SR13)
- FD1 (output bin) media full sensor (SR62)
- Duplex feed sensor (SR94)
- Fuser output sensor 1 (SR8611)
- Fuser output sensor 2 (SR8613)
- Fuser loop sensor (SR8615)
- PF (paper feeder) feed sensor (PS3602) — 550-sheet paper feeder only
- PD (paper deck) cassette 1 feed sensor (PS3401) — 1x550-sheet paper-feeder, 3x550-sheet paper-feeder, and 2,550-sheet paper-feeder only

- PD (paper deck) cassette 2 feed sensor (PS4501) — 3x550-sheet paper-feeder and 2,550-sheet paper-feeder only
- PD (paper deck) cassette 3 feed sensor (PS5601) — 3x550-sheet paper-feeder only

Figure 1-32 Paper-path jam detection sensors

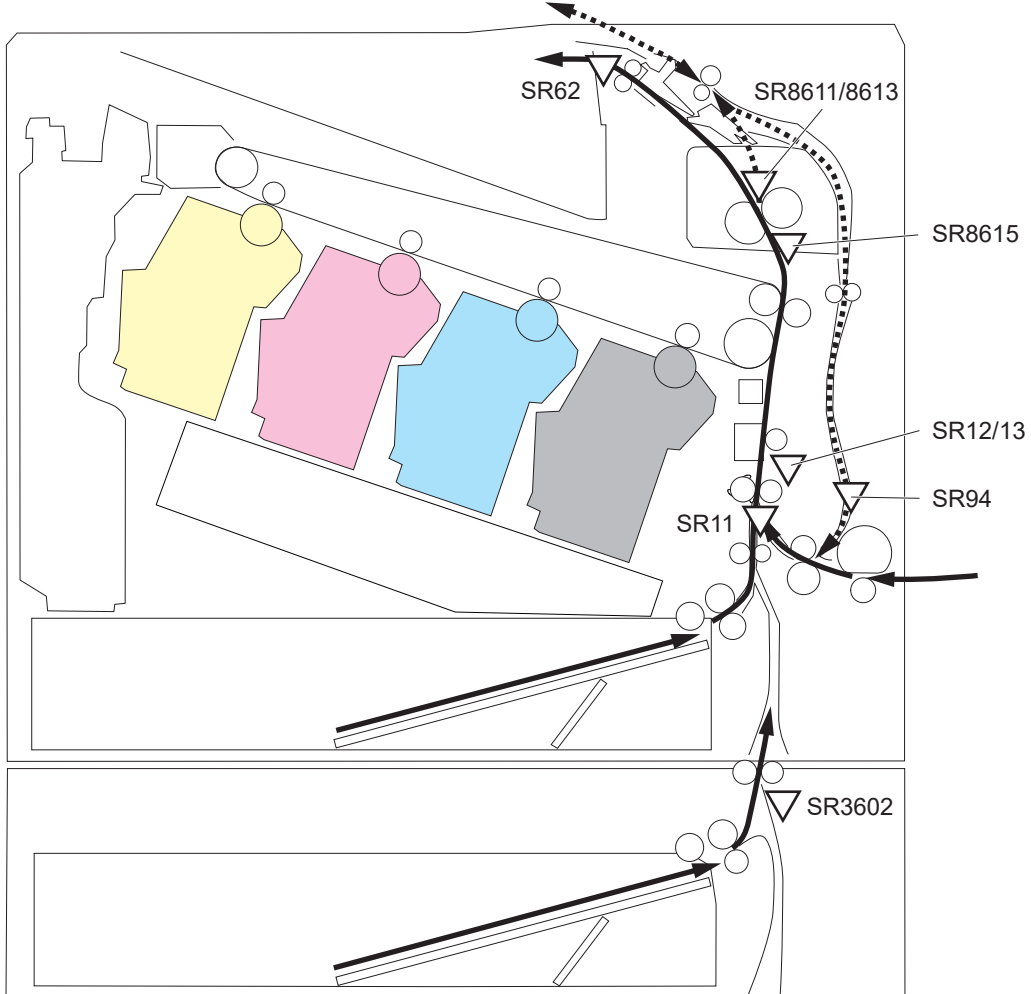

The printer determines that a jam has occurred if one of these sensors detects paper at an inappropriate time. The DC controller stops the print operation and notifies the formatter.

Figure 1-33 paper-feeder paper-path jam detection sensors

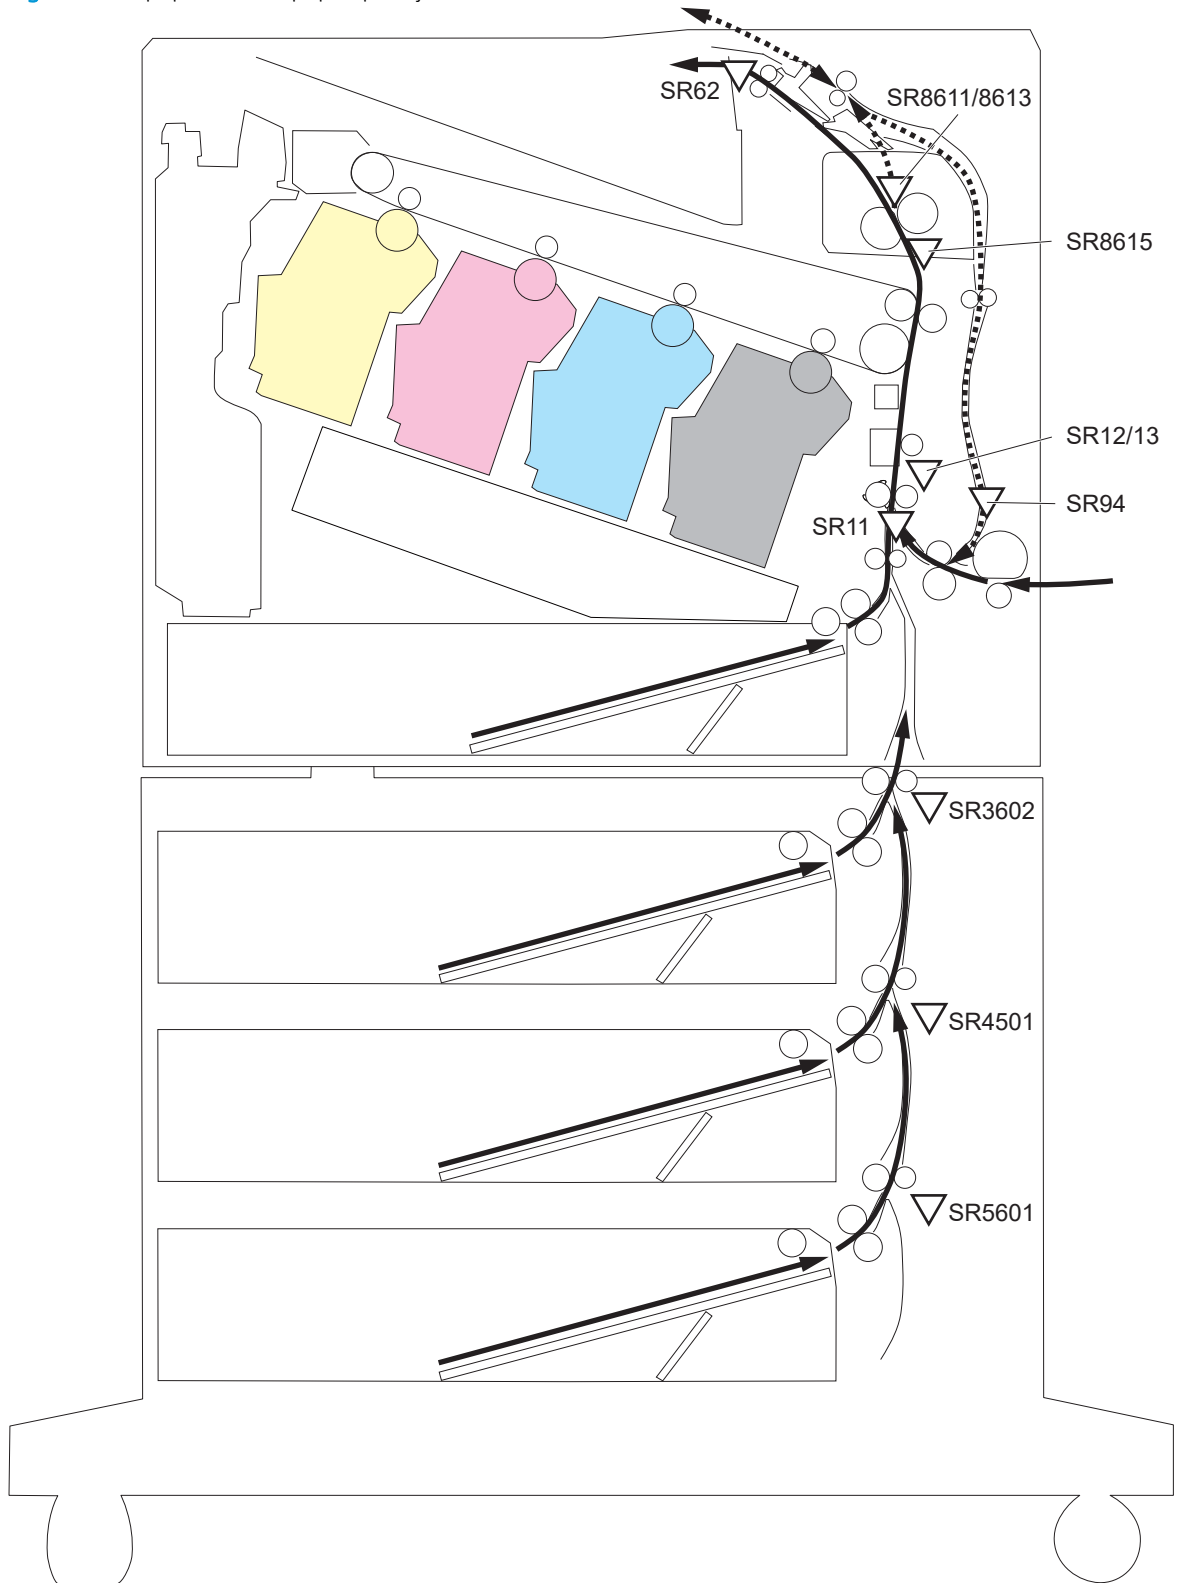


Table 1-24 Jams that the printer detects

| Jam | Supported feature |
|----------------------------|-------------------|
| No pick jam 1 | Yes |
| No pick jam 2 | Yes |
| No pick jam 3 | Yes |
| No pick jam 4 | No |
| Pickup stay jam 1 | Yes |
| Pickup stay jam 2 | No |
| Pickup stay jam 3 | No |
| Pickup stay jam 4 | No |
| Fuser delivery delay jam 1 | Yes |
| Fuser delivery delay jam 2 | No |
| Fuser delivery delay jam 3 | No |
| Fuser delivery delay jam 4 | No |
| Fuser delivery stay jam 1 | Yes |
| Fuser delivery stay jam 2 | No |
| Fuser delivery stay jam 3 | No |
| Fuser delivery stay jam 4 | No |
| Residual paper jam 1 | Yes |
| Residual paper jam 2 | No |
| Residual paper jam 3 | No |
| Residual paper jam 4 | No |
| Door open jam 1 | Yes |
| Door open jam 2 | No |
| Door open jam 3 | No |
| Door open jam 4 | No |
| Fuser wrap jam1 | Yes |
| Fuser wrap jam2 | No |
| Fuser wrap jam3 | No |
| Fuser wrap jam4 | No |
| Duplex switchback jam1 | No |
| Duplex switchback jam2 | No |
| Duplex switchback jam3 | No |
| Duplex switchback jam4 | No |
| Duplex re-pickup jam 1 | Yes |

Table 1-24 Jams that the printer detects (continued)

| Jam | Supported feature |
|--|-------------------|
| Duplex re-pickup jam 2 | No |
| Duplex re-pickup jam 3 | No |
| Duplex re-pickup jam 4 | No |
| Delivery delay jam 1 | Yes |
| Delivery delay jam 2 | No |
| Delivery delay jam 3 | No |
| Delivery delay jam 4 | No |
| Delivery stay jam 1 | No |
| Delivery stay jam 2 | No |
| Delivery stay jam 3 | No |
| Delivery stay jam 4 | No |
| Multiple feed jam 1 | No |
| Multiple feed jam 2 | No |
| Multiple feed jam 3 | No |
| Multiple feed jam 4 | No |
| Duplex feed delay jam 1 | Yes |
| Inappropriate to the delivery path Jam 1 | No |
| Inappropriate to the delivery path Jam 2 | No |

Fuser wrapping jam detection

The printer includes controls for detecting when a jam occurs causing the paper to wrap around the fuser roller.

Loop control

The loop control stabilizes the paper feed operation before the paper enters the fuser. If the pressure roller rotates slower than the secondary transfer roller, the paper loop increases and an image defect or paper crease occurs. If the pressure roller rotates faster than the secondary transfer roller, the paper loop decreases and a vertical scanning magnification failure occurs because the pressure roller pulls the paper.

To prevent these problems, the loop sensor detects the paper loop before the paper enters the fuser. The DC controller adjusts the rotational speed of the fuser motor according to the output signals from the loop sensor and maintains the paper loop. The DC controller slows the fuser motor when the sensor is off and speeds up the motor when the sensor is on.

Pressure roller pressurization and depressurization control


To prevent excessive wear on the pressure roller and help with jam-clearing procedures, the pressure roller pressurizes only during printing and standby. The DC controller reverses the fuser motor. The fuser motor rotates the fuser pressure-release cam.

The pressure roller depressurizes under the following conditions:

- The printer is turned off
- Any failure occurs
- During power-save mode
- A paper jam is detected

If the DC controller does not sense the fuser pressure-release sensor for a specified period after it reverses the fuser motor, it notifies the formatter that a fuser pressure-release mechanism failure has occurred.


Input accessories

 **NOTE:** Optional 1x550-sheet, 3x550 sheet, and 2,550 paper feeders are available for this printer. The printer supports up to three of these paper feeders at a time.

550-sheet paper feeder

The 550-sheet paper feeder is installed under the printer. It picks up paper and feeds it into the printer.


Figure 1-34 550-sheet paper feeder

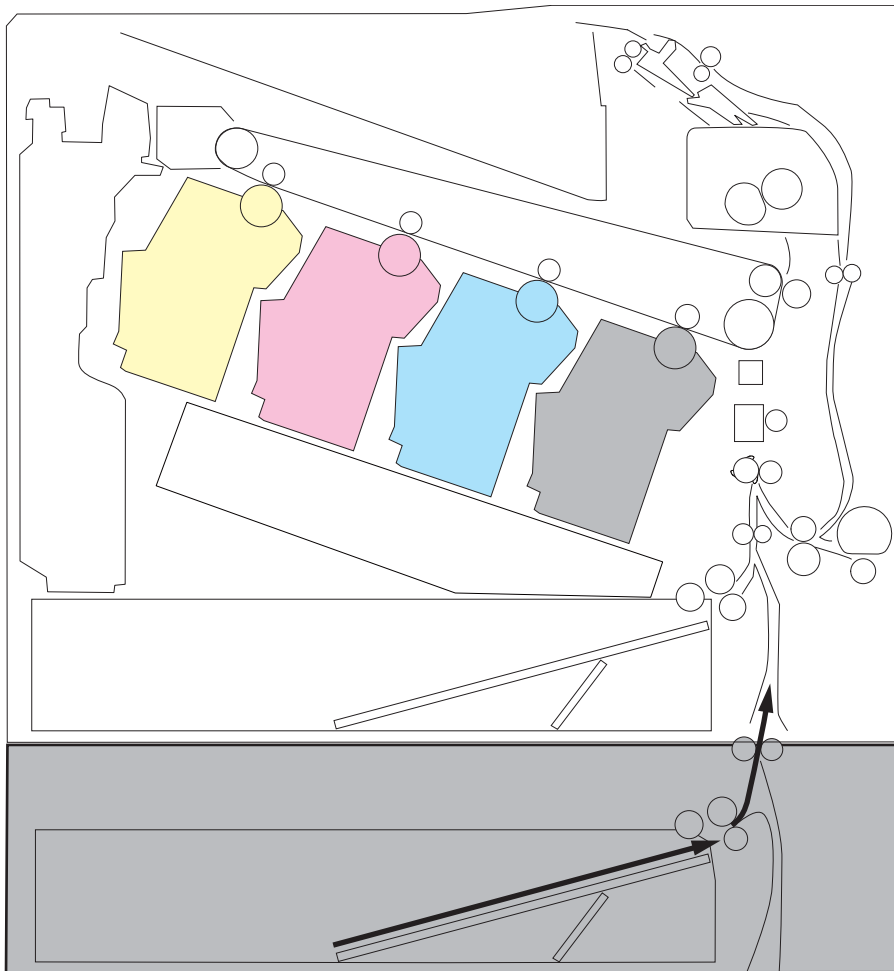

550-sheet paper feeder controller

The paper feeder controller controls the operational sequence of the paper feeder.

Figure 1-35 550-sheet paper feeder driver PCA

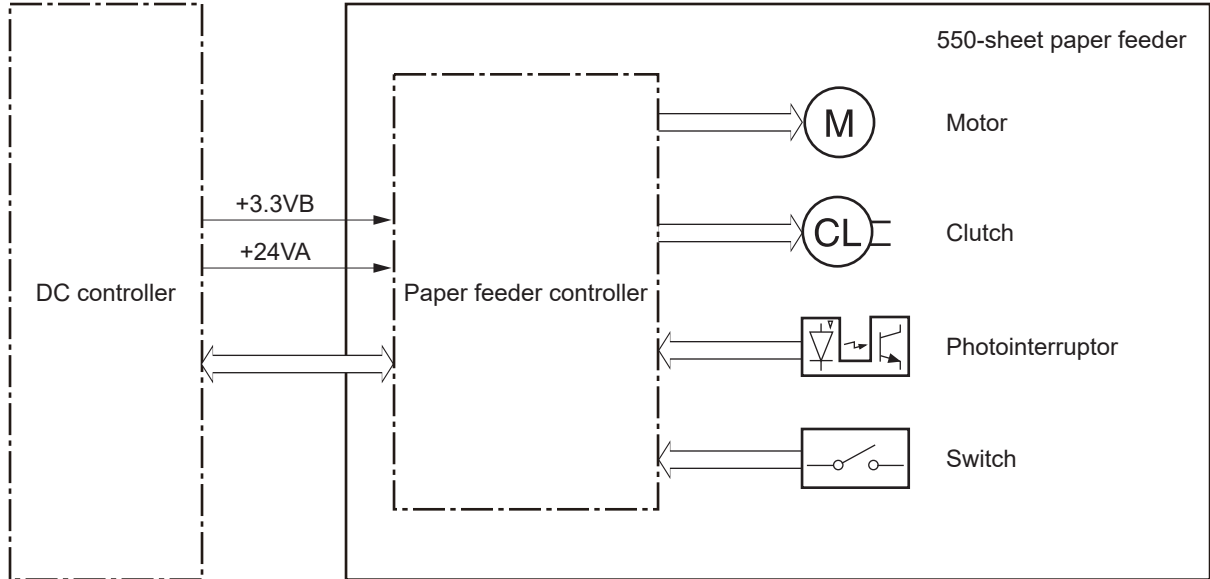

550-sheet paper feeder motor control

The 550-sheet paper feeder has one motor for lifting the tray and feeding paper.

Table 1-25 550-sheet paper feeder motor control

| Component | Drives | Failure detection |
|-----------|--|-------------------|
| M3602 | Feed motor (550-sheet paper feeder) | No |
| | Tray pickup roller (B5L24-67904) | |
| | Tray feed roller (RM2-6684-000CN) | |
| | Paper feed assembly (RM2-5145-000CN) | |
| | Lifter drive assembly (RM2-6669-000CN) | |

550-sheet paper feeder electrical components

The paper feeder contains several motors, solenoids, sensors, and switches, as described in the following table.

Table 1-26 550-sheet paper feeder electrical components

| Component type | Abbreviation | Component name | Replacement part number |
|----------------|--------------|--|---|
| Motor | M3602 | Feed motor (550-sheet paper feeder) | Paper feed assembly (RM2-5145-000CN) |
| Clutch | CL3602 | Tray pick up clutch (550-sheet paper feeder) | Lifter drive assembly (RM2-5149-000CN) |
| Switches | SW3601 | Right door switch (550-sheet paper feeder) | Right door (RM2-5146-000CN) |
| | SW3602 | Tray detection switch (550-sheet paper feeder) | Switch button (WC2-5806-000CN) |
| Sensors | PS3601 | Tray media-out sensor (550-sheet paper feeder) | Paper pick up assembly (RM2-5154-000CN) |

Table 1-26 550-sheet paper feeder electrical components (continued)

| Component type | Abbreviation | Component name | Replacement part number |
|----------------|--------------|--------------------------------------|--------------------------------------|
| | PS3602 | Feed sensor (550-sheet paper feeder) | Paper feed assembly (RM2-5145-000CN) |

550-sheet paper feeder paper pickup

The 550-sheet paper feeder picks up one sheet from the paper-feeder tray and feeds it to the printer.

Figure 1-36 Paper pickup and feed operation (550-sheet paper feeder)

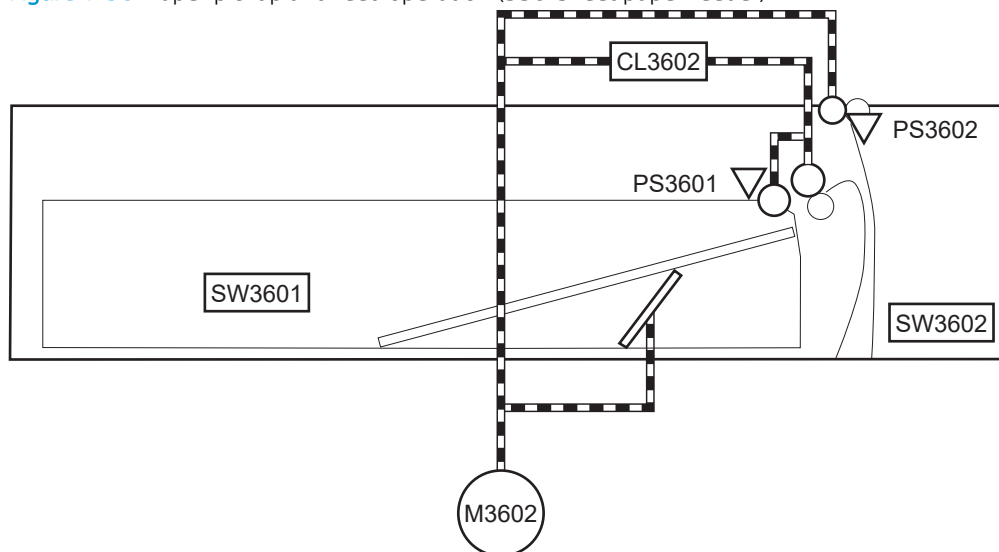


Table 1-27 Pickup feed components (1x550-sheet paper feeder)

| Abbreviation | Component | Replacement part number |
|--------------|--|---|
| M3602 | Feed motor (550-sheet paper feeder) | Paper feed assembly (RM2-5145-000CN) |
| CL3602 | Tray pickup clutch (550-sheet paper feeder) | Part not available |
| SW3601 | Media size switch | |
| SW3602 | Door switch | |
| PS3601 | Tray media-out sensor (550-sheet paper feeder) | Paper pick up assembly (RM2-5154-000CN) |
| PS3602 | Feed sensor (550-sheet paper feeder) | Paper feed assembly (RM2-5145-000CN) |

550-sheet paper feeder multiple feed prevention

The multiple-feed prevention for the 550-sheet paper feeder is operated in the same way as that of the printer base.

550-sheet paper feeder tray presence detection

The presence detection for the 550-sheet paper feeder is the same way as that of the printer base.

550-sheet paper feeder tray lift operation

The 550-sheet paper feeder keeps the paper stack surface at the correct pickup position. The tray lift operation occurs under the following conditions:

- The printer is turned on.
- The tray is inserted.
- The paper stack surface of the tray lowers.

The sequence occurs as follows:

1. The feeder tray-lifting motor rotates and the lifter moves up.
2. When the paper-feeder media-stack-surface sensor detects the stack surface of the paper, the lifting motor stops.
3. The lifting motor rotates again to lift the lifter when the paper-feeder media-stack-surface sensor detects the stack surface, and then lowers during printing.

If a tray media-stack-surface sensor does not detect a stack surface within a specified period after the lifting motor starts rotating, the paper feeder driver determines that the lifting motor has failed and notifies the formatter through the DC controller.

The paper-feeder driver notifies the formatter if either of the paper-feeder media-stack-surface sensors fails to detect the stack surface within a specified period from when a lift-up operation starts.

550-sheet paper feeder jam detection

The 550-sheet paper feeder uses the feed sensor (SR21) and right door switch (SW20) to detect the presence of paper and to check whether paper has jammed.

The 550-sheet paper feeder detects the following jams:

- **Media input delay jam 1 (550-sheet paper feeder):** Paper did not reach the registration sensor in time.
- **Media input delay jam 2 (550-sheet paper feeder):** Paper did not reach the source tray feed sensor in time.
- **Media input delay jam 3 (550-sheet paper feeder):** Paper did not reach the tray 3 feed sensor in time.
- **Pickup stationary jam (550-sheet paper feeder):** The feed sensor does not detect the trailing edge of paper within a specified time after the sensor detects the leading edge.
- **Residual paper jam (550-sheet paper feeder):** The feed sensor detects the presence of paper for a specified time during an automatic delivery operation.
- **Right door open jam (550-sheet paper feeder):** The right door open is detected during a paper feed operation.

550-sheet paper-feeder

Figure 1-37 Paper path (1x550-sheet paper-feeder)

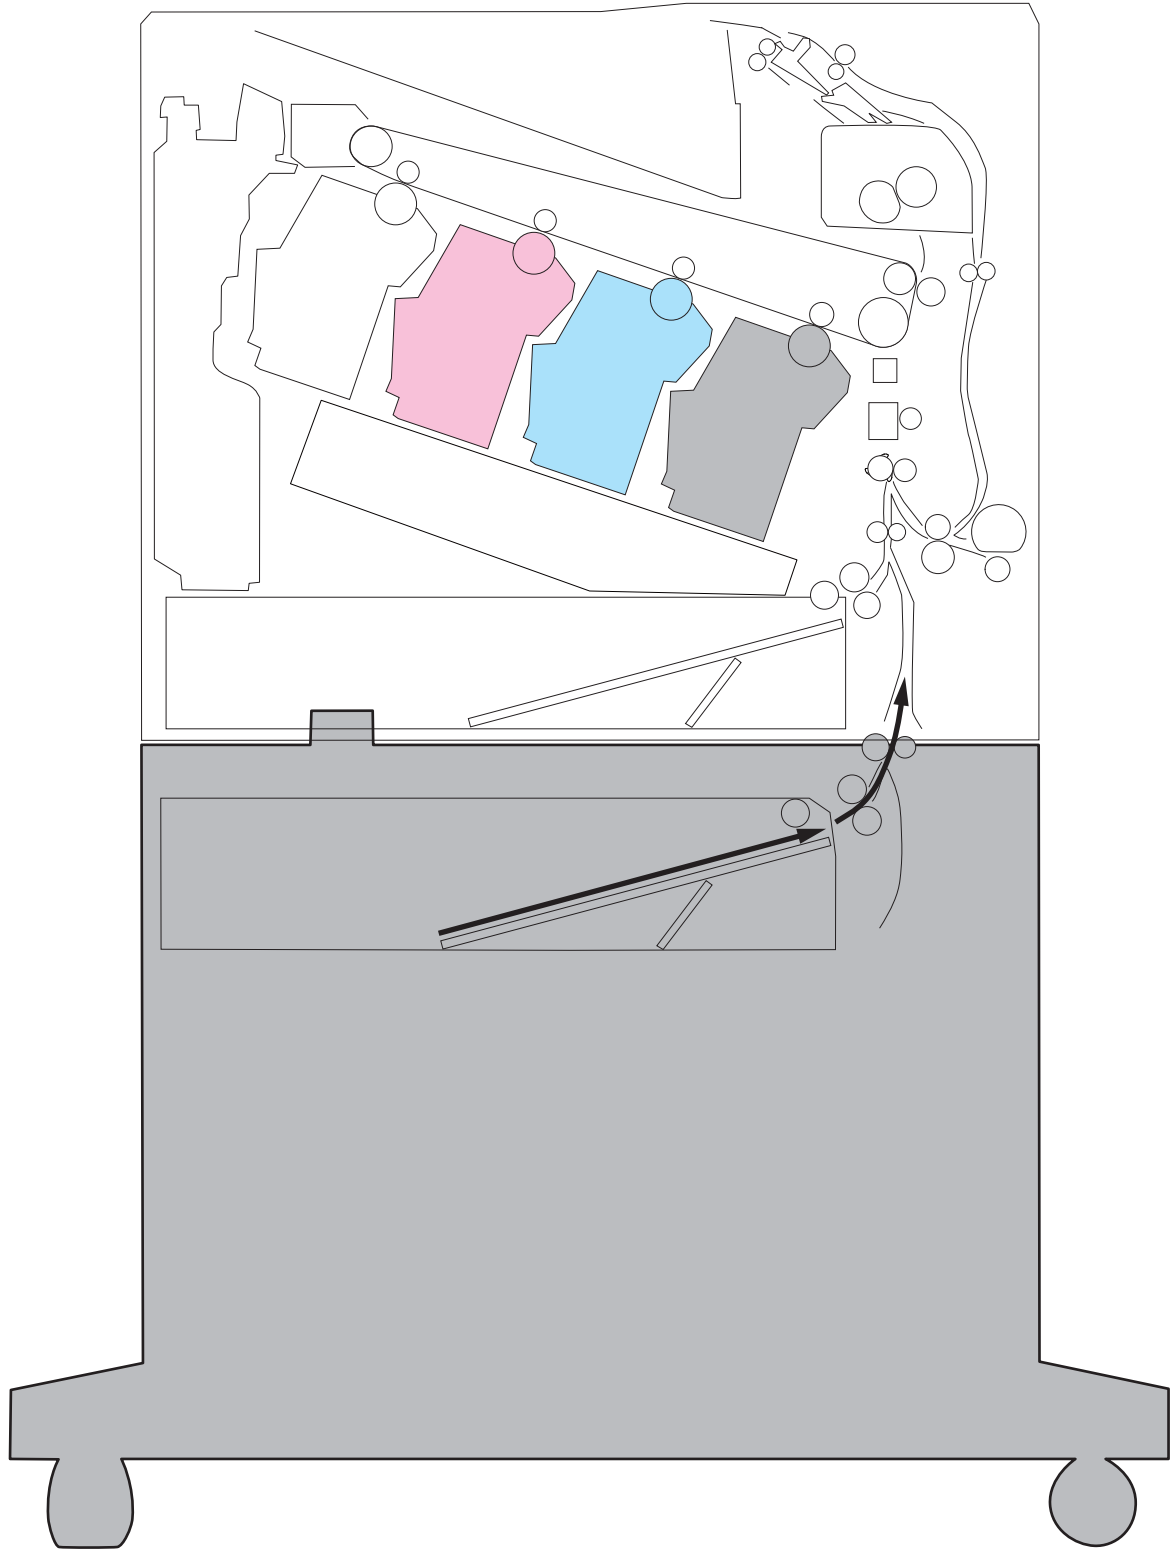


Figure 1-38 Paper path (3x550-sheet paper-feeder)

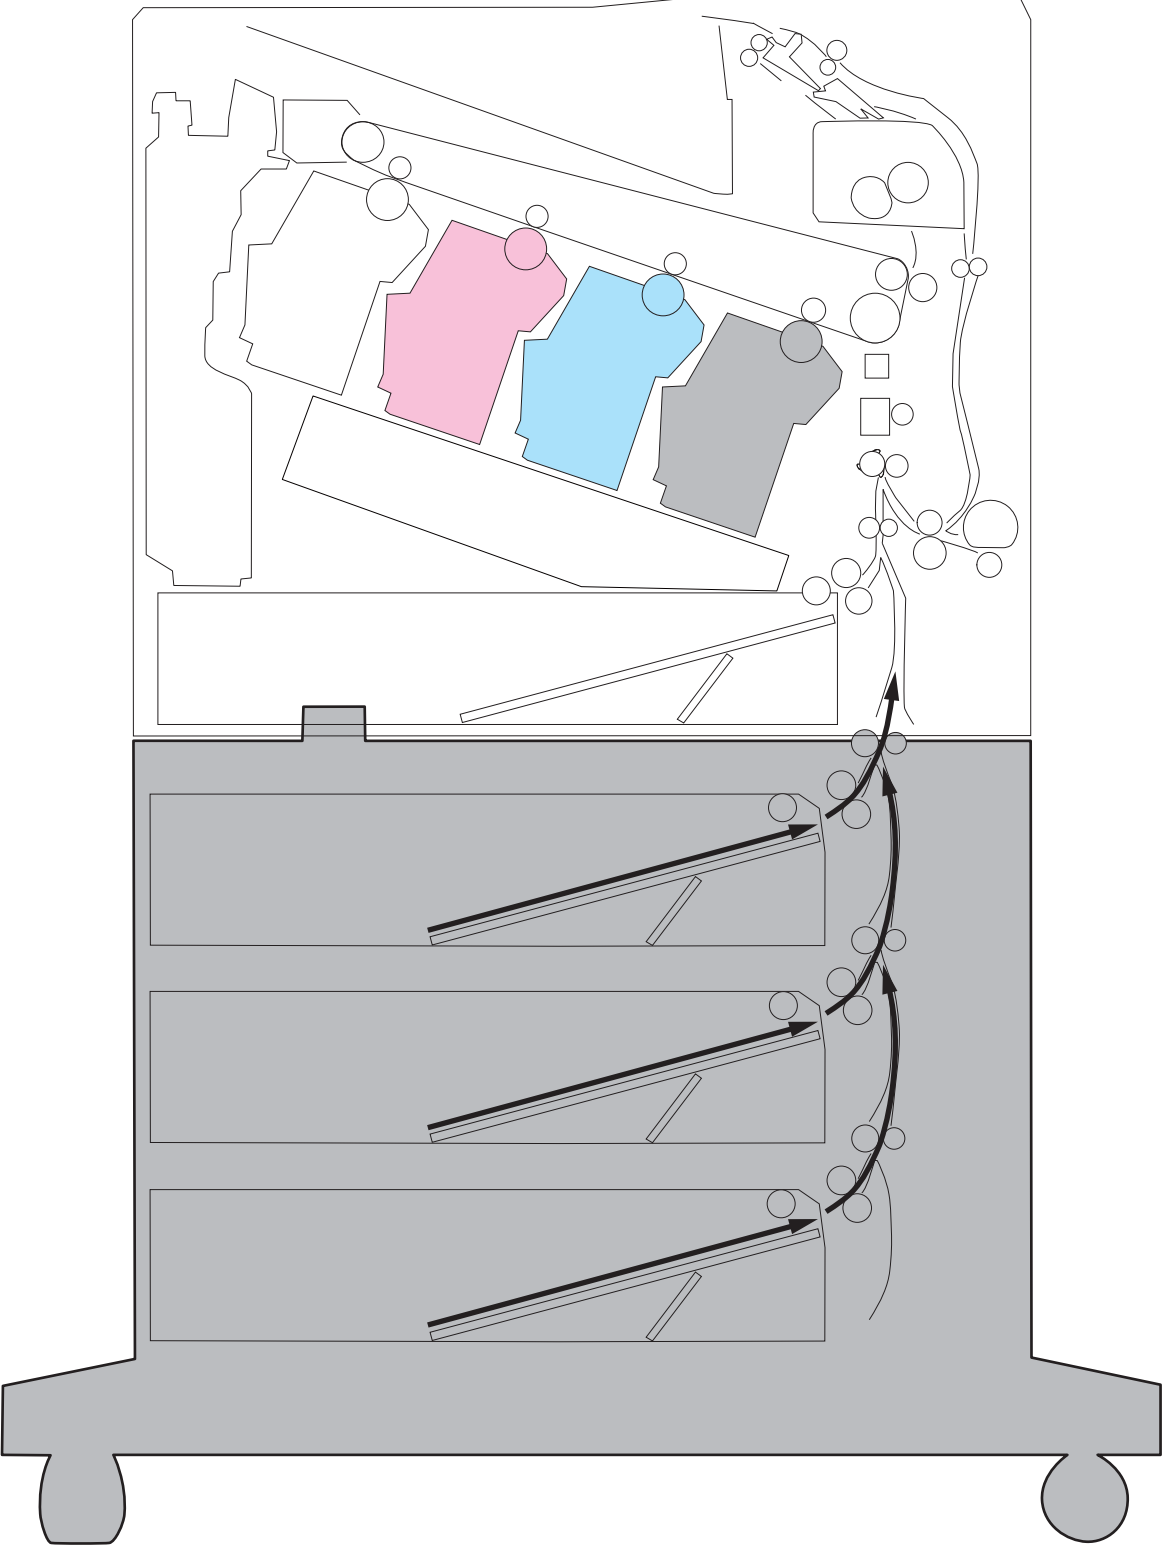


Figure 1-39 Paper path (2,550-sheet paper-feeder)

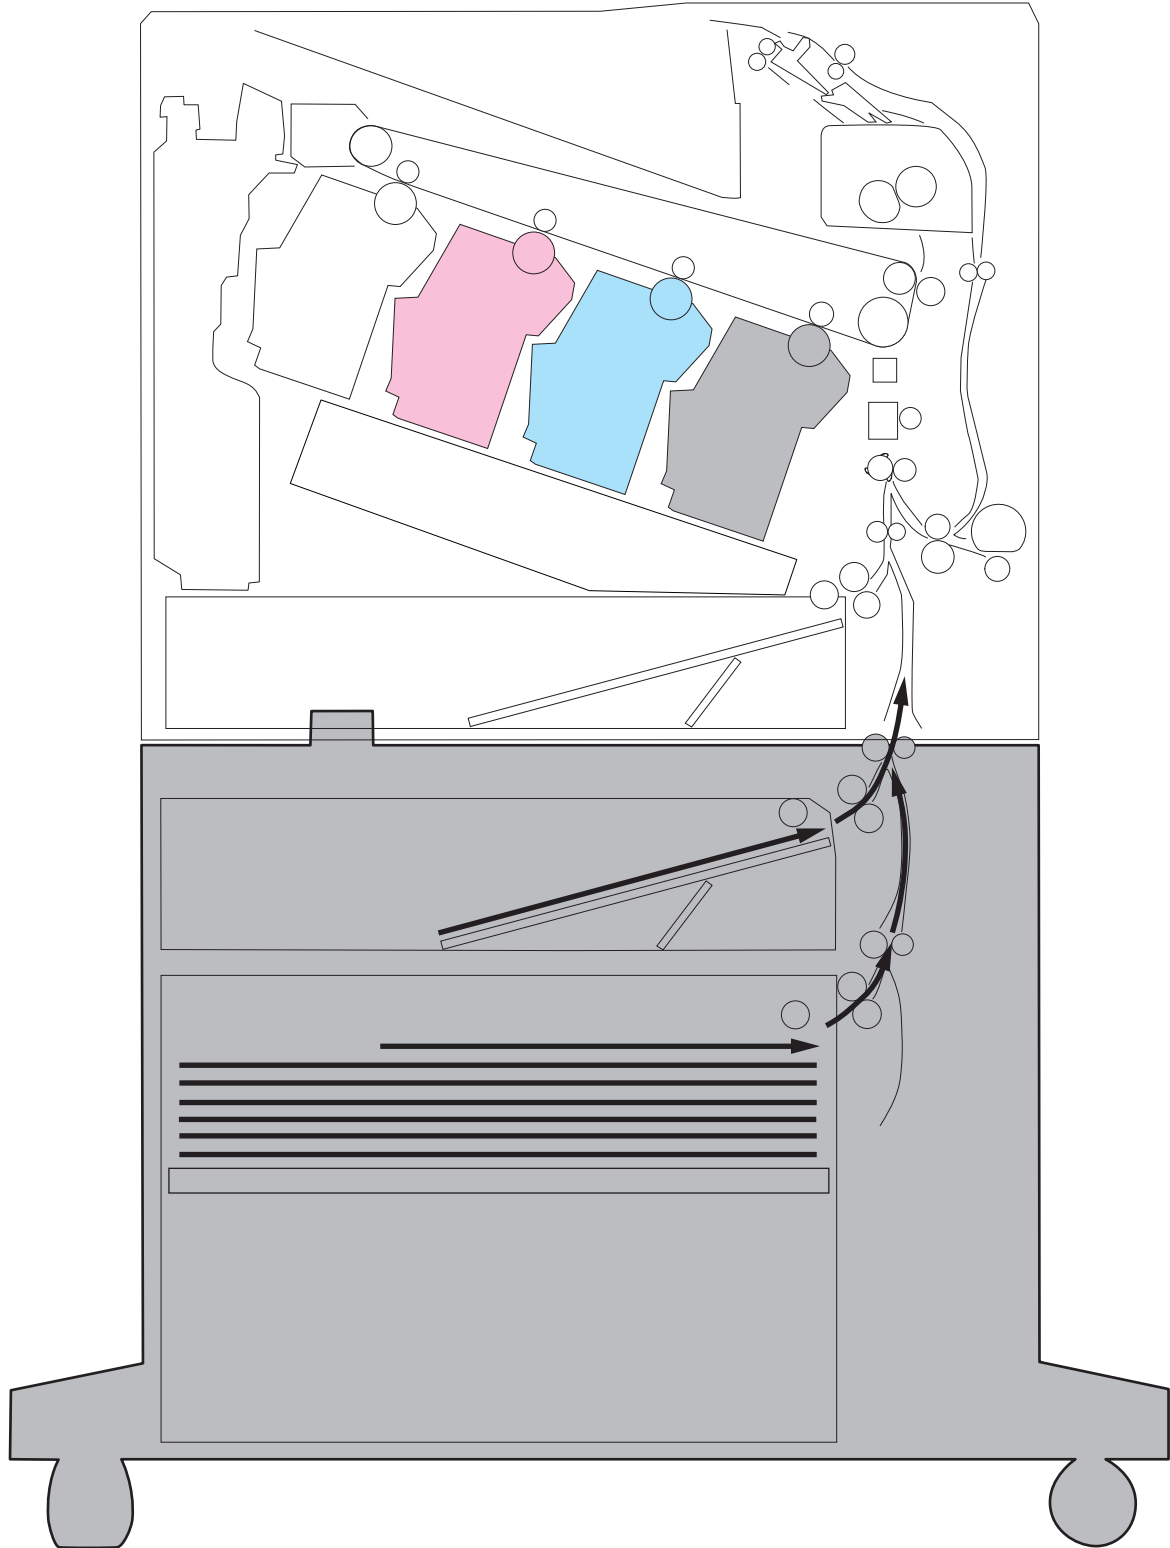


Figure 1-40 paper-feeder controller

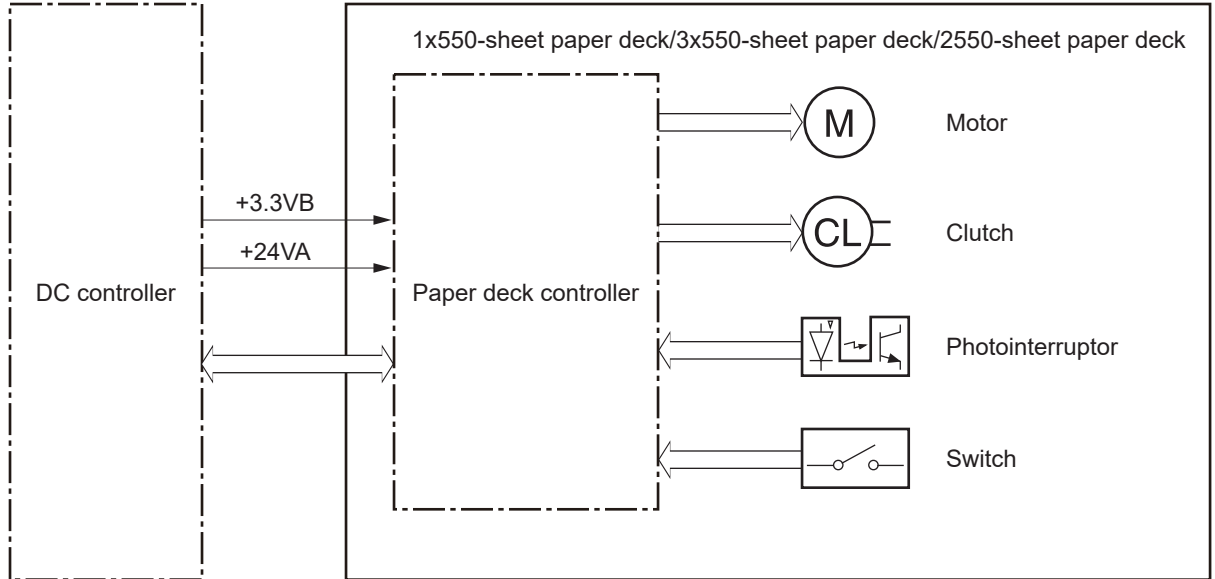


Table 1-28 Paper-feeder electrical component list

| Component type | Abbreviation | Component name | 1x550 PD | 3x550 PD | 2,550 PD |
|------------------|--------------|------------------------------------|----------|----------|----------|
| Motor | M3401 | PD cassette 1 lifter motor | Yes | Yes | Yes |
| | M3402 | PD feed motor 1 | Yes | Yes | Yes |
| | M4501 | PD cassette 2 lifter motor | No | Yes | Yes |
| | M4502 | PD feed motor 2 | No | Yes | Yes |
| | M5601 | PD cassette 3 lifter motor | No | Yes | No |
| | M5602 | PD feed motor 3 | No | Yes | No |
| Clutch | CL3401 | PD cassette 1 pickup clutch | Yes | Yes | Yes |
| | CL4501 | PD cassette 2 pickup clutch | No | Yes | Yes |
| | CL5601 | PD cassette 3 pickup clutch | No | Yes | No |
| Switch | SW3401 | PD Cassette 1 media size switch 1 | Yes | Yes | Yes |
| | SW3402 | PD Cassette 1 media size switch 2 | Yes | Yes | Yes |
| | SW4501 | PD Cassette 2 media size switch 1 | No | Yes | Yes |
| | SW4502 | PD Cassette 2 media size switch 2 | No | Yes | No |
| | SW5601 | PD Cassette 3 media size switch 1 | No | Yes | No |
| | SW5602 | PD Cassette 3 media size switch 2 | No | Yes | No |
| | SW3403 | PD door switch | Yes | Yes | Yes |
| Photointerrupter | PS3401 | PD cassette 1 feed sensor | Yes | Yes | Yes |
| | PS3402 | PD cassette 1 media out sensor | Yes | Yes | Yes |
| | PS3403 | PD cassette 1 media surface sensor | Yes | Yes | Yes |
| | PS3413 | PD pickup roller alienation sensor | Yes | Yes | Yes |

Table 1-28 Paper-feeder electrical component list (continued)

| Component type | Abbreviation | Component name | 1x550 PD | 3x550 PD | 2,550 PD |
|----------------|--------------|------------------------------------|----------|----------|----------|
| | PS4501 | PD cassette 2 feed sensor | No | Yes | Yes |
| | PS4502 | PD cassette 2 media out sensor | No | Yes | Yes |
| | PS4503 | PD cassette 2 media surface sensor | No | Yes | Yes |
| | PS5601 | PD cassette 3 feed sensor | No | Yes | No |
| | PS5602 | PD cassette 3 media out sensor | No | Yes | No |
| | PS5603 | PD cassette 3 media surface sensor | No | Yes | No |

Motor control

| Component name | Components driven | |
|----------------|----------------------------|--|
| M3401 | PD Cassette 1 lifter motor | Lift up the cassette 1 |
| M3402 | PD feed motor 1 | Cassette pickup roller, cassette feed roller, and feed roller |
| M4501 | PD Cassette 2 lifter motor | Lift up the cassette 2 or tray ¹ |
| M4502 | PD feed motor 2 | Cassette pickup roller, cassette feed roller, tray pickup roller, tray feed roller, and feed roller ¹ |
| M5601 | PD Cassette 3 lifter motor | Lift up the cassette 3 ² |
| M5602 | PD feed motor 3 | Cassette pickup roller, cassette feed roller and feed roller ² |

¹ Only for 3x550-sheet paper-feeder and 2,550-sheet paper-feeder

² Only for 3x550-sheet paper-feeder

Pickup-and-feed Operation

The paper-feeder picks up the sheet of paper one by one in the paper-feeder cassette and feeds it to the printer.

Figure 1-41 1x550-sheet paper-feeder/3x550-sheet paper-feeder electrical components

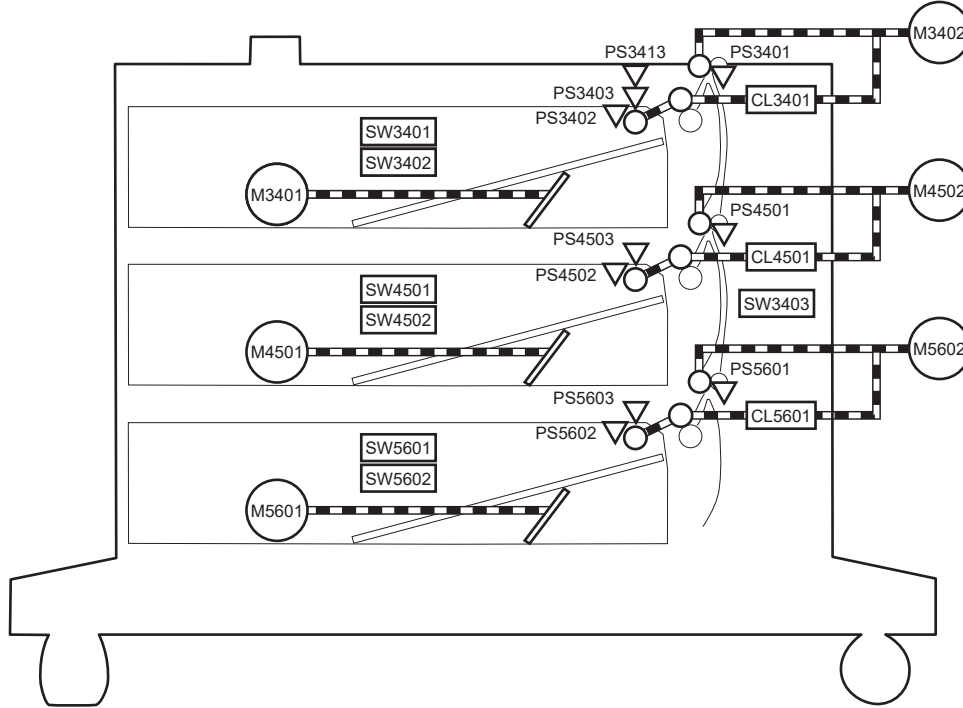


Table 1-29 Electrical component list (1x550-sheet paper-feeder/3x550-sheet paper-feeder)

| Abbreviation | Component name | 1x550 PD | 3x550 PD |
|--------------|-----------------------------------|----------|----------|
| M3401 | PD cassette 1 lifter motor | Yes | Yes |
| M3402 | PD feed motor 1 | Yes | Yes |
| M4501 | PD cassette 2 lifter motor | No | Yes |
| M4502 | PD feed motor 2 | No | Yes |
| M5601 | PD cassette 3 lifter motor | No | Yes |
| M5602 | PD feed motor 3 | No | Yes |
| CL3401 | PD cassette 1 pickup clutch | Yes | Yes |
| CL4501 | PD cassette 2 pickup clutch | No | Yes |
| CL5601 | PD cassette 3 pickup clutch | No | Yes |
| SW3401 | PD Cassette 1 media size switch 1 | Yes | Yes |
| SW3402 | PD Cassette 1 media size switch 2 | Yes | Yes |
| SW4501 | PD Cassette 2 media size switch 1 | No | Yes |
| SW4502 | PD Cassette 2 media size switch 2 | No | Yes |
| SW5601 | PD Cassette 3 media size switch 1 | No | Yes |
| SW5602 | PD Cassette 3 media size switch 2 | No | Yes |
| SW3403 | PD door switch | Yes | Yes |
| PS3401 | PD cassette 1 feed sensor | Yes | Yes |
| PS3402 | PD cassette 1 media out sensor | Yes | Yes |

Table 1-29 Electrical component list (1x550-sheet paper-feeder/3x550-sheet paper-feeder) (continued)

| Abbreviation | Component name | 1x550 PD | 3x550 PD |
|--------------|------------------------------------|----------|----------|
| PS3403 | PD cassette 1 media surface sensor | Yes | Yes |
| PS3413 | PD pickup roller alienation sensor | Yes | Yes |
| PS4501 | PD cassette 2 feed sensor | No | Yes |
| PS4502 | PD cassette 2 media out sensor | No | Yes |
| PS4503 | PD cassette 2 media surface sensor | No | Yes |
| PS5601 | PD cassette 3 feed sensor | No | Yes |
| PS5602 | PD cassette 3 media out sensor | No | Yes |
| PS5603 | PD cassette 3 media surface sensor | No | Yes |

Figure 1-42 Outline of electrical component (2,550-sheet paper-feeder)

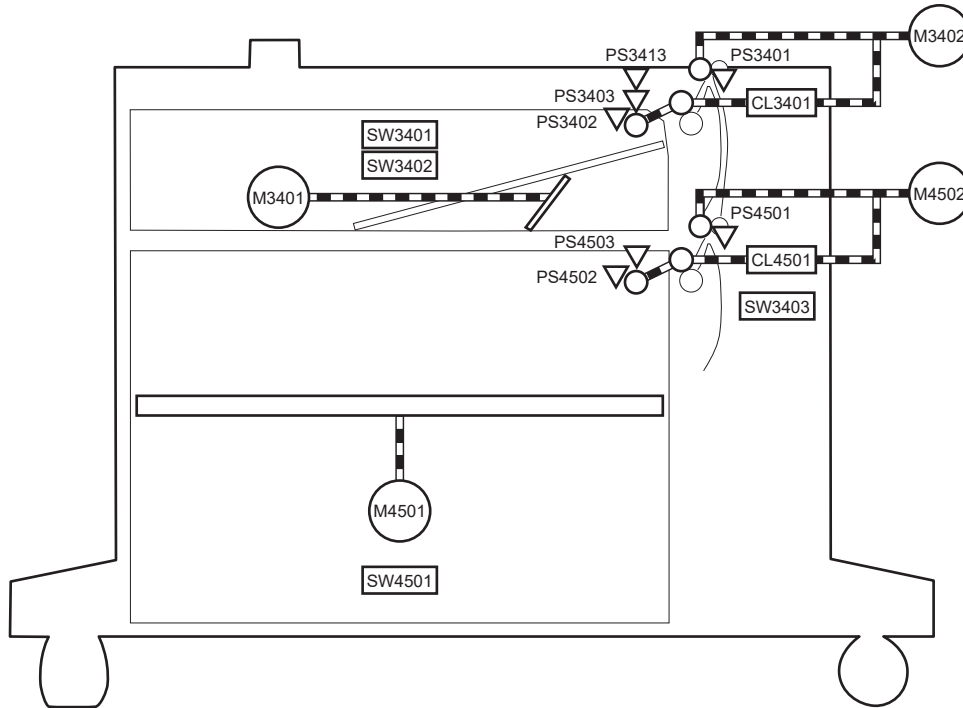


Table 1-30 Electrical component list (2,550-sheet paper-feeder)

| Abbreviation | Component name |
|--------------|-----------------------------------|
| M3401 | PD cassette 1 lifter motor |
| M3402 | PD feed motor 1 |
| M4501 | PD cassette 2 lifter motor |
| M4502 | PD feed motor 2 |
| CL3401 | PD cassette 1 pickup clutch |
| CL4501 | PD cassette 2 pickup clutch |
| SW3401 | PD Cassette 1 media size switch 1 |

Table 1-30 Electrical component list (2,550-sheet paper-feeder) (continued)

| Abbreviation | Component name |
|--------------|------------------------------------|
| SW3402 | PD Cassette 1 media size switch 2 |
| SW4501 | PD Cassette 2 media size switch 1 |
| SW3403 | PD door switch |
| PS3401 | PD cassette 1 feed sensor |
| PS3402 | PD cassette 1 media out sensor |
| PS3403 | PD cassette 1 media surface sensor |
| PS3413 | PD pickup roller alienation sensor |
| PS4501 | PD cassette 2 feed sensor |
| PS4502 | PD cassette 2 media out sensor |
| PS4503 | PD cassette 2 media surface sensor |

Table 1-31 Paper-feeder functions

| Function | Supported |
|--|-----------|
| Cassette lift-up control | Yes |
| Cassette presence detection | Yes |
| Cassette media size detection | Yes |
| Cassette media stack surface detection | Yes |
| Cassette media out detection | Yes |
| Cassette media level detection | No |
| Multiple-feed prevention | Yes |
| Automatic delivery | Yes |

Staple stacker multi bin mailbox

The staple stacker multi bin mailbox (SSMBM) is installed on the upper side of the printer, and it delivers the print media to output tray after the staple process. The SSMBM controller controls the operation sequence of the SSMBM.

Figure 1-43 Staple stacker multi bin mailbox paper path


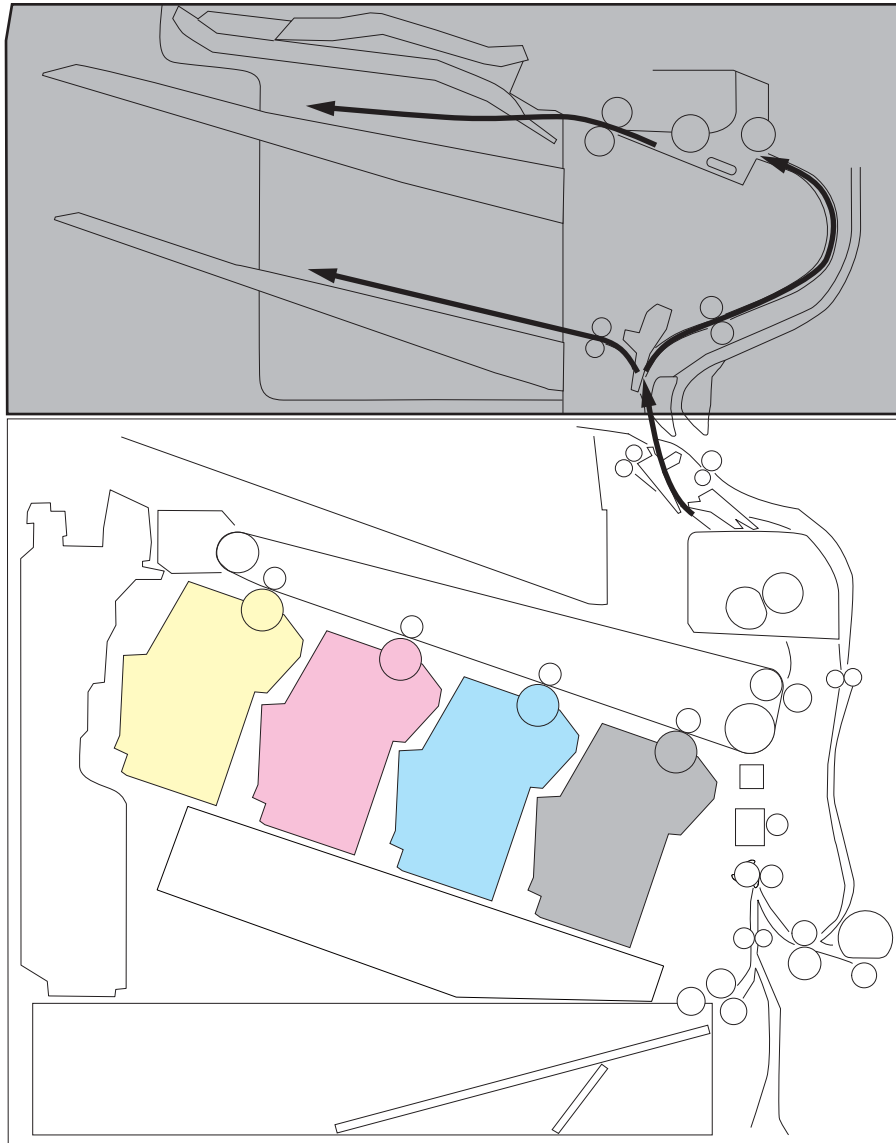


Figure 1-44 SSMBM controller

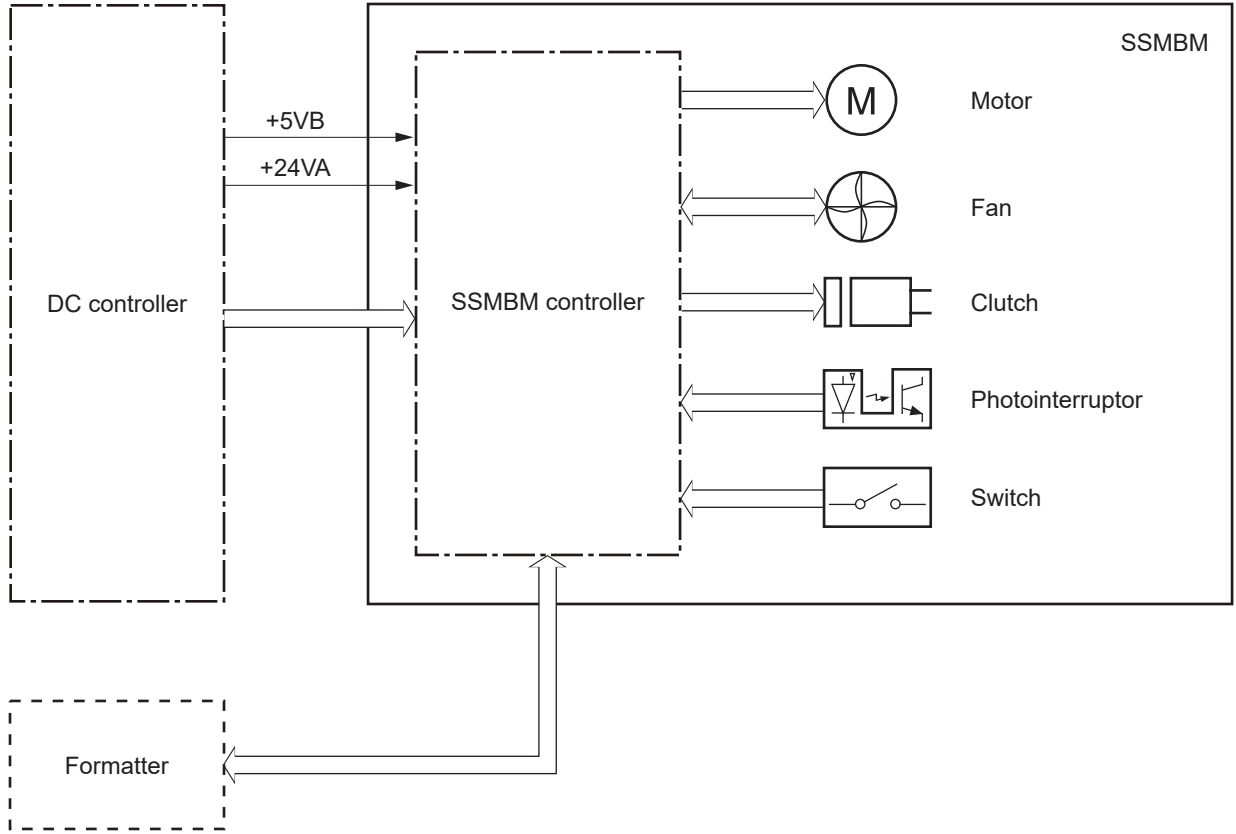

| Component type | Abbreviation | Component name | Replacement part number |
|----------------|--------------|-------------------|--|
| Motor | M11 | SS output motor | Upper paper feed assembly (RM2-6810-000CN) |
| | M12 | SS feed motor | Motor, stepping, DC (RK2-8149-000CN) |
| | M14 | Jogger motor | Jog assembly (RM2-1066-000CN) |
| | M15 | Y alignment motor | Upper paper feed assembly (RM2-6810-000CN) |
| | M16 | Staple motor | Stapler assembly (RK2-8148-000CN) |
| | M17 | Lifter motor | Upper paper feed assembly (RM2-6810-000CN) |
| | Fan | FAN11 | MBM fan |

| Component type | Abbreviation | Component name Replacement part number |
|------------------|--------------|---|
| Solenoid | SL11 | Inlet flapper solenoid Lower paper feed assembly (RM2-6815-000CN) |
| | SL12 | Stamp solenoid Lower paper feed assembly (RM2-6815-000CN) |
| | SL13 | Output bin 2 flapper solenoid Lower paper feed assembly (RM2-6815-000CN) |
| Photointerrupter | PS101 | Bin 1 media presence sensor Upper paper feed assembly (RM2-6810-000CN) |
| | PS102 | SS exit sensor Upper paper feed assembly (RM2-6810-000CN) |
| | PS103 | Staple inlet sensor Stapler assembly (RK2-8148-000CN) |
| | PS104 | Y alignment home position sensor Upper paper feed assembly (RM2-6810-000CN) |
| | PS105 | Bin 1 media full sensor Jog assembly (RM2-1066-000CN) |
| | PS106 | Alienation home position sensor Upper paper feed assembly (RM2-6810-000CN) |
| | PS107 | Jogger home position sensor Jog assembly (RM2-1066-000CN) |
| | PS108 | Bin 2 media presence sensor Lower paper feed assembly (RM2-6815-000CN) |
| | PS109 | Bin 2 media full sensor Lower paper feed assembly (RM2-6815-000CN) |
| | PS110 | SS inlet sensor Lower paper feed assembly (RM2-6815-000CN) |

| Component type | Abbreviation | Component name Replacement part number |
|----------------|--------------|--|
| | PS111 | Bin 1 upper limit sensor Lower paper feed assembly (RM2-6815-000CN) |
| | PS112 | Bin 1 lower limit sensor Lower paper feed assembly (RM2-6815-000CN) |
| | PS113 | Staple low sensor Stapler assembly (RK2-8148-000CN) |
| | PS114 | Staple ready sensor Stapler assembly (RK2-8148-000CN) |
| | PS115 | Staple home position sensor Stapler assembly (RK2-8148-000CN) |
| Switch | SW2 | SS door switch Upper paper feed assembly (RM2-6810-000CN) |
| | SW11 | Staple door switch Upper paper feed assembly (RM2-6810-000CN) |

Motor Control

The SSMBM has six motors for the paper feed, paper alignment, output bin lift up/down, and staple operations.

Table 1-32 Motor list

| Component name | Components driven | Replacement part number |
|-----------------------|---|--|
| M11 SS output motor | Output bin 1 delivery roller, exit feed roller | Upper paper feed assembly (RM2-6810-000CN) |
| M12 SS feed motor | Output bin 2 delivery roller, inlet feed roller | Lower paper feed assembly (RM2-6815-000CN) |
| M14 Jogger motor | Jogger guide | Jog assembly (RM2-1066-000CN) |
| M15 Y alignment motor | Alignment roller | Upper paper feed assembly (RM2-6810-000CN) |
| | Engage/disengage the output bin 1 delivery roller | |
| M16 Staple motor | Staple | Stapler assembly (RK2-8148-000CN) |
| M17 Lifter motor | Lift up/down the output bin 1 | Upper paper feed assembly (RM2-6810-000CN) |

The SSBM detects the following motor failures:

- Jogger motor failure
- Y alignment motor failure
- Staple motor failure

Fan Control

The SSMBM fan prevents the temperature from rising in the SSMBM assembly.

| Component name | Cooling area | Type | Speed |
|----------------|--------------|--------|----------|
| FAN11 | MBM fan | Intake | Full/Low |

The SSBM detects the following fan failure:

- Fan motor 1 failure (MBM fan)

Delivery Operation

The SSMBM deliver a print media from the printer to the specified output bin for each print job. (Mailbox mode)

Figure 1-45 Motors and solenoids

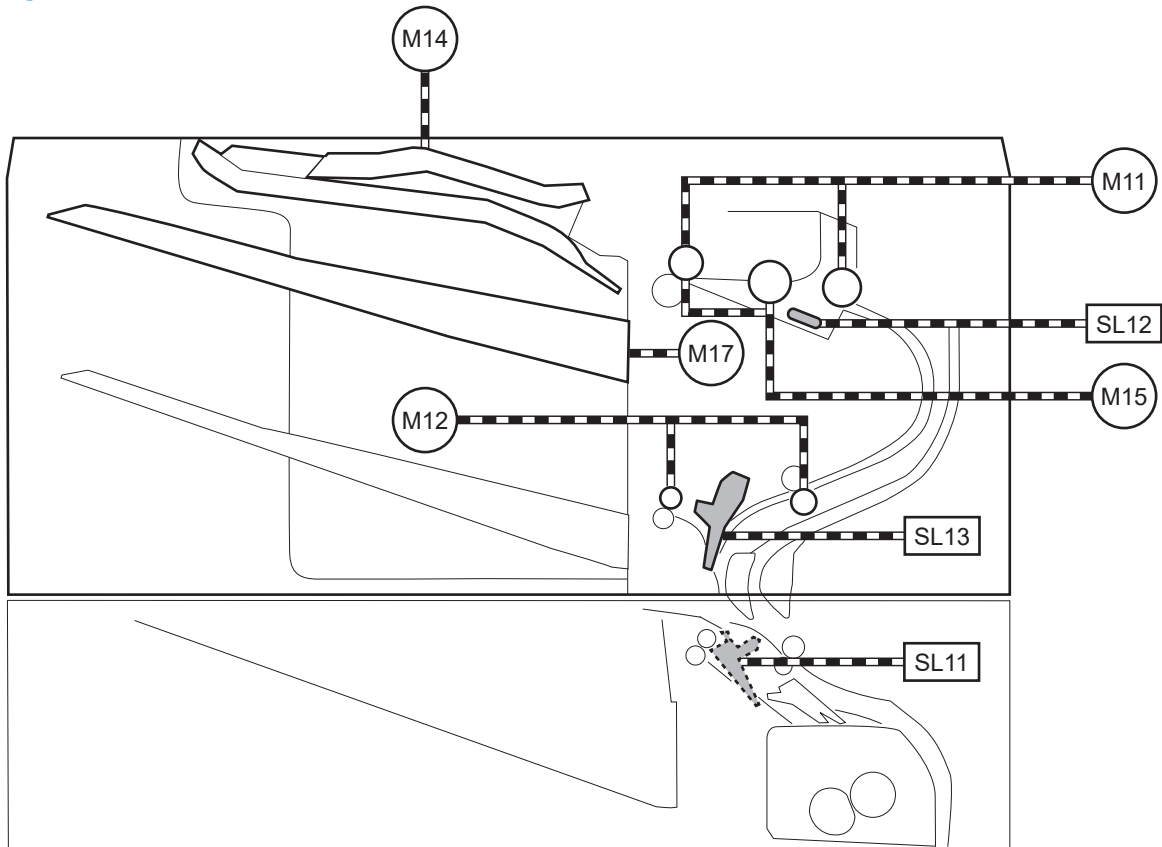



Table 1-33 Electrical component list

| Abbreviation | Component name | Replacement part number |
|--------------|-----------------|--|
| M11 | SS output motor | Upper paper feed assembly (RM2-6810-000CN) |

Table 1-33 Electrical component list (continued)

| Abbreviation | Component name | Replacement part number |
|--------------|-------------------------------|--|
| M12 | SS feed motor | Lower paper feed assembly (RM2-6815-000CN) |
| M14 | Jogger motor | Jog assembly (RM2-1066-000CN) |
| M15 | Y alignment motor | Upper paper feed assembly (RM2-6810-000CN) |
| M16 | Staple motor | Stapler assembly (RK2-8148-000CN) |
| M17 | Lifter motor | Upper paper feed assembly (RM2-6810-000CN) |
| SL11 | Inlet flapper solenoid | Lower paper feed assembly (RM2-6815-000CN) |
| SL12 | Stamp solenoid | Lower paper feed assembly (RM2-6815-000CN) |
| SL13 | Output bin 2 flapper solenoid | Lower paper feed assembly (RM2-6815-000CN) |

Figure 1-46 Stapler/stacker sensors and switches

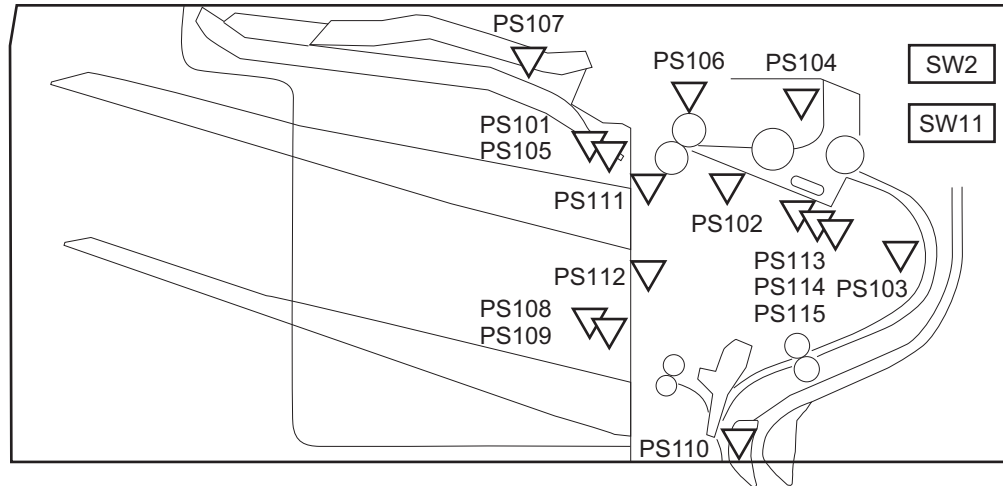

| Abbreviation | Component name | Replacement part number |
|--------------|----------------------------------|--|
| PS101 | Bin 1 media presence sensor | Upper paper feed assembly (RM2-6810-000CN) |
| PS102 | SS exit sensor | Upper paper feed assembly (RM2-6810-000CN) |
| PS103 | Staple inlet sensor | Stapler assembly (RK2-8148-000CN) |
| PS104 | Y alignment home position sensor | Upper paper feed assembly (RM2-6810-000CN) |
| PS105 | Bin 1 media full sensor | Jog assembly (RM2-1066-000CN) |
| PS106 | Alienation home position sensor | Upper paper feed assembly (RM2-6810-000CN) |
| PS107 | Jogger home position sensor | Jog assembly (RM2-1066-000CN) |
| PS108 | Bin 2 media presence sensor | Lower paper feed assembly (RM2-6815-000CN) |
| PS109 | Bin 2 media full sensor | Lower paper feed assembly (RM2-6815-000CN) |
| PS110 | SS inlet sensor | Lower paper feed assembly (RM2-6815-000CN) |
| PS111 | Bin 1 upper limit sensor | Lower paper feed assembly (RM2-6815-000CN) |
| PS112 | Bin 1 lower limit sensor | Lower paper feed assembly (RM2-6815-000CN) |

| Abbreviation | Component name | Replacement part number |
|--------------|-----------------------------|--|
| PS113 | Staple low sensor | Stapler assembly (RK2-8148-000CN) |
| PS114 | Staple ready sensor | Stapler assembly (RK2-8148-000CN) |
| PS115 | Staple home position sensor | Stapler assembly (RK2-8148-000CN) |
| SW2 | SS door switch | Upper paper feed assembly (RM2-6810-000CN) |
| SW11 | Staple door switch | Upper paper feed assembly (RM2-6810-000CN) |

Table 1-34 Stapler/stacker functions

| Function | Applied |
|-------------------------|---------|
| Mailbox mode | Yes |
| Stacker mode | No |
| Function separator mode | No |
| Job separator mode | No |
| Collator mode | No |
| Staple control | Yes |
| Automatic delivery | Yes |

Scanning and image capture system (M681/M682/E67550/E67560/E67650/E67660)

The scanner is a carriage-type platen scanner which includes the frame, glass, scan module, and a scan control board (SCB). The scanner has a sensor to detect legal-sized media and a switch to indicate when the document feeder is opened.

The document feeder and control panel are attached to the scanner. If the scanner fails, it can be replaced as a whole unit. The scanner replacement part does not include the document feeder, control panel, or SCB.

Document feeder system (M681/M682/E67550/E67560/E67650/E67660)

Document feed system

This section describes the following:

- Sensors in the document feeder
- Document feeder paper path
- Simplex single-pass scanning
- Electronic duplexing (e-duplex) single-pass scanning
- Deskew operation
- Document feeder hinges

The printer supports single-pass electronic duplexing (e-duplex) copy jobs. Two separate scan modules scan the front-side and back-side of an e-duplex copy job page in a single pass through the document feeder.

For the M681 models, the document feeder supports a smart background, which auto-crops and adjusts the image extents.

Sensors in the document feeder

The document feeder contains the following sensors:

- **ADF paper present sensor:** Detects whether a document is present in the document feeder. If paper is present in the document feeder when copies are made, the printer scans the document using the document feeder. If no paper is present when copies are made, the printer scans the document using the scanner glass.
- **ADF Y (length) sensor:** Detects whether a legal-size original is present in the document feeder.
- **ADF jam cover sensor:** Detects whether the document feeder cover is open or closed.
- **ADF paper path deskew sensor:** Detects the top of the page as it enters the deskew rollers.
- **ADF paper path pick success sensor:** Detects a successful one page feed from the document feeder tray.



NOTE: This sensor uses ultrasonic sound to detect a multi-page paper feed.

- **Paper path sensor 1:** Detects the top of the page as it approaches the front-side scan module (document feeder glass).

Figure 1-47 Document feeder sensors

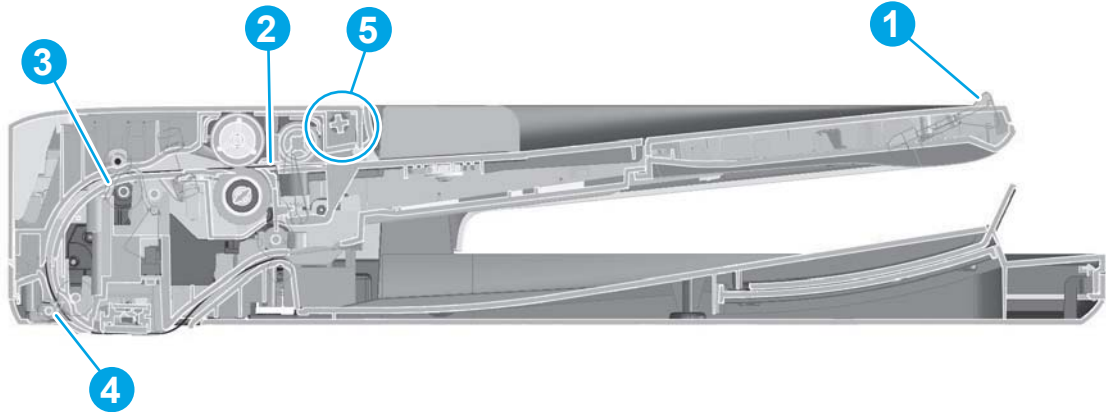


Table 1-35 Document feeder sensors

| Item | Description |
|--|--|
| 1 | ADF Y (length) sensor |
| 2 | ADF paper present sensor |
| 3 | ADF deskew sensor |
| 4 | Paper path sensor 1 |
| <p>NOTE: For an e-duplex copy job, this sensor is used to activate the front-side scan module (in the scanner base) and the front-side background selector (in the document feeder), if needed.</p> | |
| 5 | ADF jam cover sensor (open the jam access cover and insert a folded piece of paper to activate the flag) |

Document feeder paper path

Figure 1-48 Document feeder paper path

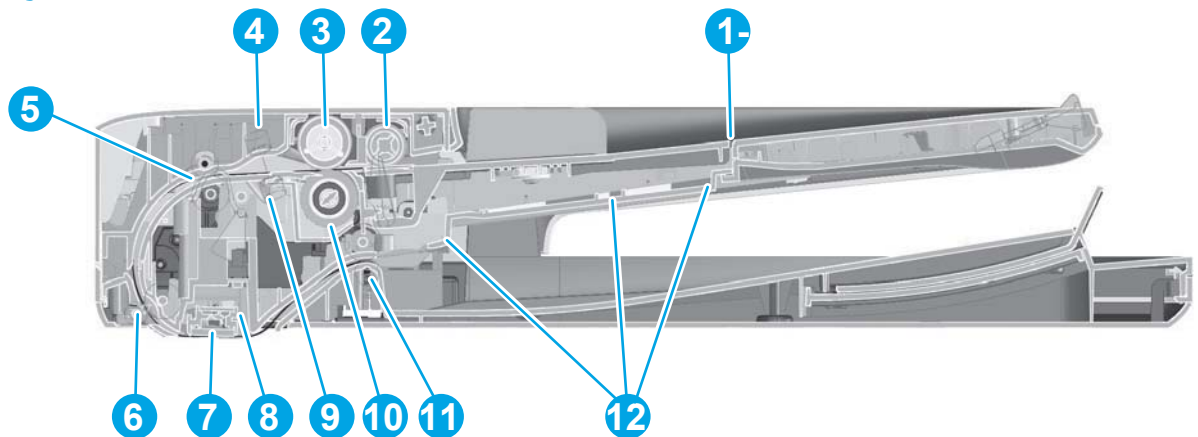


Table 1-36 Document feeder paper path

| Item | Description | Item | Description |
|--|-------------|------|------------------------|
| 1 | Input tray | 7 | Front-side scan module |
| <p>NOTE: This scan module (document feeder glass) is located in the scanner base.</p> | | | |

Table 1-36 Document feeder paper path (continued)

| Item | Description | Item | Description |
|------|---------------------------|------|------------------------------|
| 2 | Pre-pick roller | 8 | Back-side scan module |
| 3 | Pick roller | 9 | ADF pick success transmitter |
| 4 | ADF pick success receiver | 10 | Separator roller |
| 5 | Deskew drive roller | 11 | Exit drive roller |
| 6 | Prescan drive roller | 12 | Lift plate |

Document feeder simplex operation

Following is the basic sequence of operation for a document feeder simplex job.

1. The ADF jam cover sensor detects when the cover door is in the closed position.
2. The ADF paper present sensor activates when paper is loaded onto the input tray.
3. The feed motor rotates to raise the lift plate and starts to pick the loaded paper.
4. The ADF multi-pick (ultrasonic) sensor activates when the leading edge of the media is driven past the sensor. The printer firmware registers a successful pick operation.
5. The ADF paper path deskew activates when the leading edge of the paper passes it. The printer firmware registers the leading edge of the paper position.
6. The leading edge of the paper drives into the nip point of the deskew drive roller and the deskew pinch rollers. This creates a buckle of paper by the nip point for pick-skew correction.
7. The deskew motor rotates the deskew drive roller to pull the paper into the prescan drive roller.
8. The pick motor stops turning and allows both the pick and feed roller to turn freely while the paper is pulled in by the deskew drive roller.
9. The feed motor rotates to drive the paper into the prescan front-side sensor. The firmware registers the leading edge position of the paper as the multi-pick sensor activates.
10. The feed motor continues to rotate and drive the leading edge of the paper through the preset distance from the multi-pick sensor to the front-side scan zone. The scanner begins the scanning and data retrieval process.
11. The ADF multi-pick (ultrasonic) sensor deactivates when the trailing edge of the paper passes the sensor. The firmware registers the trailing edge of the paper position.
12. The feed motor continues to rotate and drive the trailing edge of the paper through the preset distance from the ADF multi-pick (ultrasonic) sensor to the front-side scan zone. The scanner ends the scanning and data retrieval process.
13. The feed motor continues to rotate and ejects the trailing edge of the paper into the output bin.
14. One of the following occurs:

- If the copy job is complete, the ADF paper present sensor deactivates. The feed motor reverses rotation to raise the pick roller.
- If the copy job is not complete, the ADF paper present sensor is active. The printer firmware detects additional pages in the input tray and the process repeats.

Document feeder e-duplex operation

Following is the basic sequence of operation for a document feeder simplex job.



NOTE: For an e-duplex copy job, the background scan operation begins immediately after the simplex sequence of operation ends.

1. The feed motor continues to drive the paper until the leading edge activates the prescan back-side sensor. The printer firmware registers the position of the leading edge of the paper.
2. The feed motor continues to rotate to drive the leading edge of the paper through the preset distance from prescan back-side sensor to the back-side background selector scan zone. The back-side background scan module begins scanning and retrieval of the data.
3. The prescan back-side sensor deactivates when the trailing edge of the paper passes it. The printer firmware registers the trailing edge of the paper position.
4. The feed motor continues to rotate to drive the trailing edge of the paper edge past the back-side background selector scan zone.
5. The feed motor continues to rotate and ejects the trailing edge of the paper into the output bin.
6. One of the following occurs:
 - If the copy job is complete, the ADF paper present sensor deactivates. The feed motor reverses rotation to raise the pick roller.
 - If the copy job is not complete, the ADF paper present sensor is active. The printer firmware detects additional pages in the input tray and the process repeats.

Deskew operation

Sliding side guides on the input tray make sure that the paper stack is correctly aligned at the center of the input tray when paper is loaded in the tray. The correct position of the loaded paper is parallel with the direction of travel into the document feeder paper path


The document feeder further reduces paper skew due to improper loading of paper in the input tray by buckling the paper to create a paper buffer.

The document feeder aligns the leading edge of the paper parallel with the deskew drive rollers before it is driven further into the document feeder paper path.

Figure 1-49 Deskew operation



Document feeder hinges

 **NOTE:** The left and right document feeder hinges are different parts. During repairs, they must be clearly identified and installed in the correct orientation. The parts are keyed so they cannot be installed in the wrong position.

The document feeder hinges allow positioning the assembly vertically above the scanner glass to accommodate the placement of books and other objects up to 25 mm (1.0 in) in height on the scanner glass. The document feeder still closes (the bottom of the document feeder is kept parallel to the scanner glass) and allows the printer to operate.

The document feeder hinges provide height adjustment of 25 mm (1.0 in) when a maximum downward force of 4.5 kg (10 lb) is applied at the front edge of the assembly, with the fulcrum (such as the spine of a book) centered on the scanner glass and parallel to its long axis.

The document feeder will withstand a downward force of at least 4.5 kg (10 lb) applied at the front edge center of the assembly—when the fulcrum (such as the spine of a book) is located anywhere on the scanner glass and parallel to its long axis—without breaking, deforming, detaching or experiencing performance degradation.

The document feeder hinges support the assembly in the open position and prevent the document feeder from suddenly closing in a damaging or loud manner.

The hinges can hold the document feeder static in all positions higher than 100 mm (3.93 in); measured at the front of the assembly. Less than 2.3 kg (5 lb) of force is required to open or close the document feeder.

The hinges allow the document feeder to open to an angle of between 60° and 80° from the horizontal position (this angle will not allow the printer to tip over).

Figure 1-50 Document feeder open (book mode)


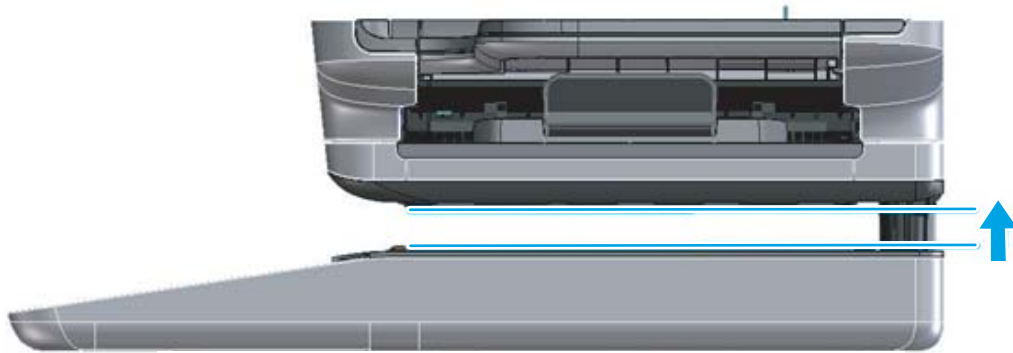


Figure 1-51 Document feeder open (60° to 80°)

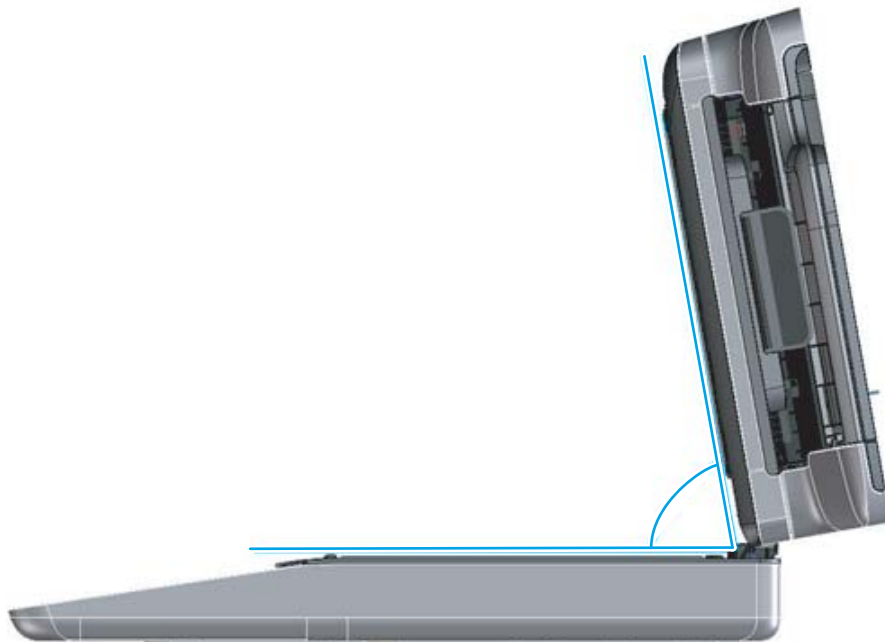

2 Solve problems

- [HP service and support](#)
- [Manually unlock the front door](#)
- [Solve problems checklist](#)
- [Troubleshooting process](#)
- [Tools for troubleshooting](#)
- [Resolve print-quality problems](#)
- [Clean the printer](#)
- [Solve paper handling problems](#)
- [Solve performance problems](#)
- [Solve wired network problems](#)
- [Solve wireless network problems](#)
- [Service mode functions](#)
- [Firmware upgrades](#)
- [Solve fax problems or email](#)

HP service and support

Learn about HP access to additional service and support information.

Additional service and support for channel partners

Channel partners, go to partner.hp.com, and then use the steps below to access the HP Web-based Interactive Search Engine (WISE).

Access WISE for Channel partners

1. Select **Services & Support**, and then select **Services Delivery**.
2. Select **Technical Support**, and then select **Technical Documentation**.

Find information about the following topics

- Service manuals
- Service advisories
- Up-to-date control panel message (CPMD) troubleshooting
- Install and configure
- Printer specifications
- Solutions for printer issues and emerging issues
- Remove and replace part instructions and videos
- Warranty and regulatory information

Additional service and support for HP internal personnel

HP internal personnel, go to one of the following Web-based Interactive Search Engine (WISE) sites:

Americas (AMS)

- <https://support.hp.com/wise/home/ams-enWISE> - English
- <https://support.hp.com/wise/home/ams-esWISE> - Spanish
- <https://support.hp.com/wise/home/ams-ptWISE> - Portuguese
- <https://support.hp.com/wise/home/ams-frWISE> - French

Asia Pacific / Japan (APJ)

- <https://support.hp.com/wise/home/apj-enWISE> - English
- <https://support.hp.com/wise/home/apj-jaWISE> - Japanese
- <https://support.hp.com/wise/home/apj-koWISE> - Korean
- <https://support.hp.com/wise/home/apj-zh-HansWISE> - Chinese (simplified)

- [https://support.hp.com/wise/home/apj-zh-HantWISE - Chinese \(traditional\)](https://support.hp.com/wise/home/apj-zh-HantWISE - Chinese (traditional))
- <https://support.hp.com/wise/home/apj-thWISE - Thai>


Europe / Middle East / Africa (EMEA)

- <https://support.hp.com/wise/home/emea-enWISE - English>


Manually unlock the front door

If there is an issue with the front door locks, use the following procedure to manually disengage them.


1. On the front side of the left door, insert a small, sharp tool (callout 1), such as a precision flat-blade screwdriver into the hole (callout 2) on the left door to unlock the front door (callout 3) at the left side.

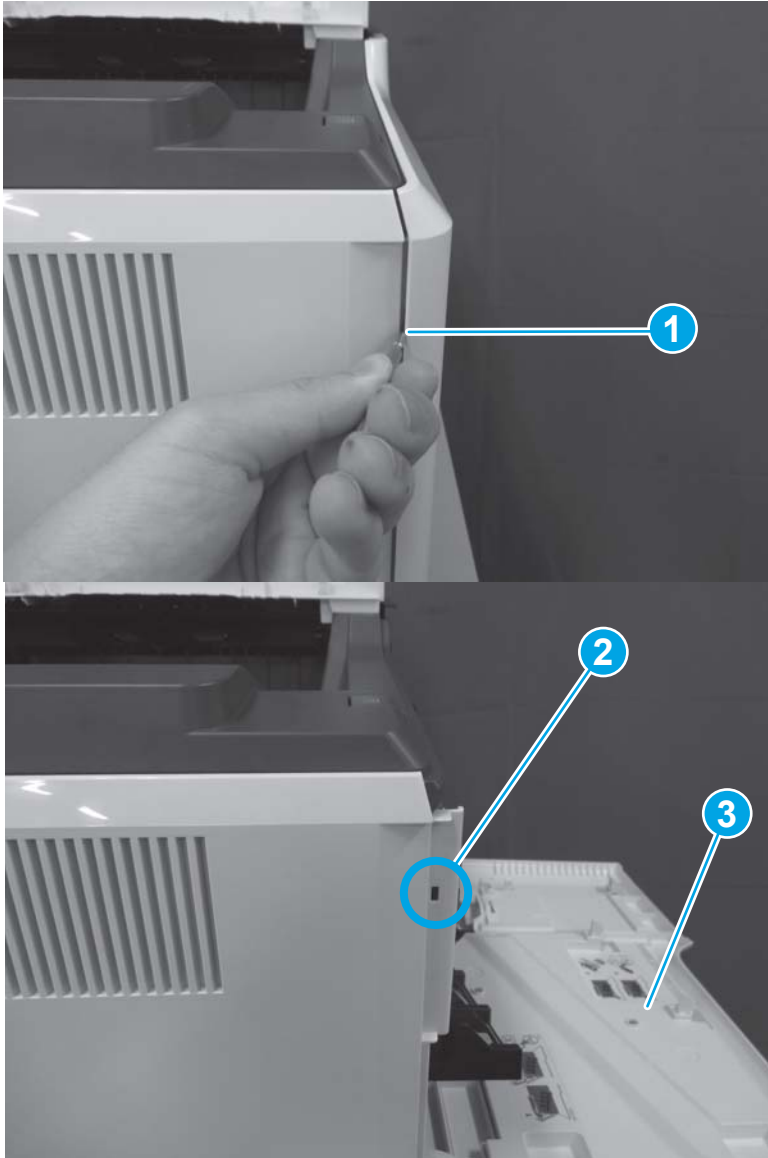

2. Open the right door, and locate the gap (callout 1) in the upper left area.

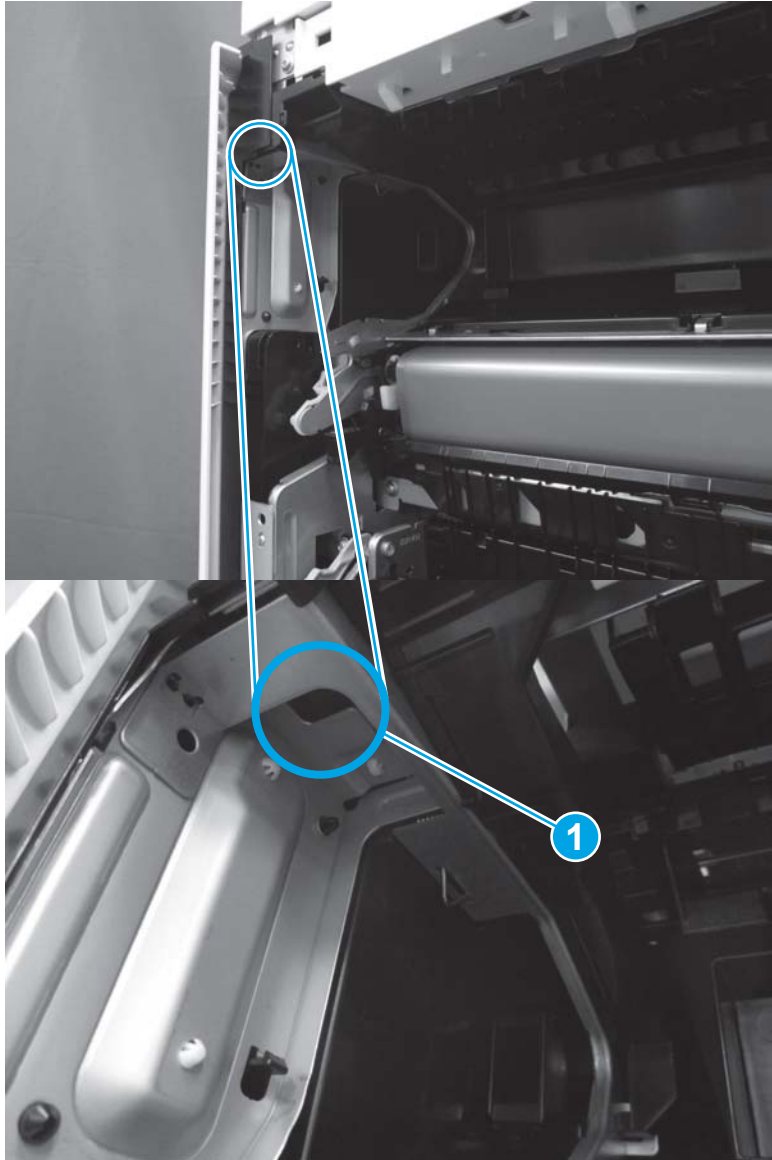

3. Insert your finger in the gap (callout 1), and then push the lever (callout 2) in the direction indicated to unlock the front door at the right side.

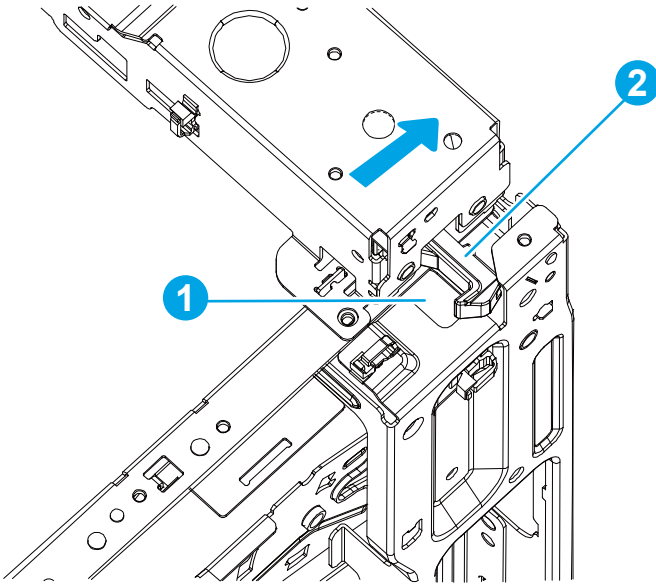


Solve problems checklist

- [Solve problems checklist](#)
- [Print configuration report](#)
- [Print settings menu map](#)
- [Print current settings pages](#)
- [Print event log](#)
- [Pre-boot menu options](#)
- [Remote Admin](#)

Solve problems checklist

If the printer is not correctly functioning, complete the steps (in the order given) in the following checklist. If the printer fails a checklist step, follow the corresponding troubleshooting suggestions for that step. If a checklist step resolves the problem, skip the remaining checklist items.

1. If the control panel is blank or black, check the following before proceeding:
 - Check to make sure that the printer is not in Sleep mode (tap the touchscreen control panel or press a button on the LCD control panel).
 - Check the power cable.
 - Check that the power is turned on.
 - Make sure that the line voltage is correct for the printer power configuration. (See the label that is on the back of the printer for voltage requirements.) If a power strip is in use, and its voltage is not within specifications, connect the printer directly into the electrical outlet. If it is already connected into the outlet, try a different outlet.

 **NOTE:** The following conditions indicate that the printer has frozen while in Sleep mode. Opening a door, tapping the control panel (touchscreen control panels), or pressing a control panel button (LCD control panels) causes the printer to wake up from Sleep mode.

- The control panel home button LED is illuminated.
- The power-switch LED flashes once every three to five seconds.

If the control panel is not responding to touch (touchscreen control panels), or if it appears black or blank, try the following:

- a. Turn the printer power off, and then on again.
- b. Verify that the control panel is correctly functioning by accessing the control panel diagnostics. See the control panel checks section of this manual.

 **TIP:** The LED on the formatter will blink if the control panel is not detected or the cables are not properly seated.

If the control panel does not respond to the diagnostic button, try the following:

- Try printing from a host computer. Does the printer print a test page?
 - Is the printer HP Embedded Web Server (EWS) accessible?
 - Turn the power off.
 - Reseat the cable connections on the bottom of the control panel assembly and the control panel connectors at the formatter.
 - Turn the printer power on, and then check for functionality of the control panel by tapping the touchscreen or pressing a button on the LCD control panel.
- c. If the error persists, replace the control panel assembly.
2. The control panel should indicate a [Ready](#), [Paused](#), or [Sleep mode on](#) status. If an error message displays, resolve the error.
3. For network connection errors, check the cables.
- a. Check the network cable connections between the printer and the computer or network port. Make sure that the connections are secure.



NOTE: The network LEDs should be illuminated and flashing.

- b. Make sure that the cables are not faulty by trying different cables, if possible.
- c. Check the network connection. Verify that the port is active.
4. Print a configuration page. If the printer is connected to a network, an HP Jetdirect page also prints.

Print a configuration page from a touchscreen control panel

- a. From the [Home](#) screen on the printer control panel, select [Reports](#).
- b. Select [Configuration/Status Pages](#).
- c. Select [Configuration Page](#).



TIP: Multiple report pages can be selected, and then printed together.

- d. Select [Print](#) to print the pages.


Print a configuration page from an LCD control panel

- a. From the [Home](#) screen on the printer control panel, use the arrow buttons to navigate to [Reports](#), and then select [OK](#).
- b. Open the following menus:
- [Configuration/Status Pages](#)
 - [Configuration Page](#)
- c. Select [Print](#), and then select [OK](#) to print the pages.



TIP: Multiple report pages can be selected, and then printed together.

- If the pages do not print, check that at least one tray contains paper.

 **TIP:** Make sure that the selected paper size and type meet HP specifications. Also open the **Trays** menu on the printer control panel and verify that the tray is configured correctly for the paper type and size.


- If the page jams in the printer, follow the instructions on the control panel to clear the jam.
- If the page does not print correctly, the problem is with the printer hardware.
- If the page prints correctly, the printer hardware is working. The problem is with the host computer, with the print driver, or with the program.

5. Print a supplies status page and then check that the maintenance items below are not at their end-of-life.

 **TIP:** If a maintenance item needs to be replaced, order the part number provided below.


Print a supplies status page from a touchscreen control panel


- a. From the Home screen on the printer control panel, select **Reports**.
- b. Open the following menus:
 - **Configuration/Status Pages**
 - **Supplies Status Page**
- c. Select **Print** to print the page, and then check the maintenance items (listed below in this step).

 **TIP:** Multiple report pages can be selected, and then printed together.

Print a supplies status page from an LCD control panel

- a. From the **Home** screen on the printer control panel, use the arrow keys to navigate to **Reports**, and then select **OK**.
- b. Open the following menus:
 - **Configuration/Status Pages**
 - **Supplies Status Page**
- c. Select **Print**, and then select **OK** to print the page, and then check the maintenance items (listed below in this step).

 **TIP:** Multiple report pages can be selected, and then printed together.

 **NOTE:** HP long-life consumables and maintenance kit life specifications are estimations. Actual individual life/yield during normal use varies depending on usage, environment, media, and other factors. Estimated life is not an implied guarantee or warrantable.

- Fuser assembly; estimated life: 150,000 pages
 - RM2-1928-000CN (110V)
 - RM2-1929-000CN (220V)
- Document feeder maintenance kit; estimated life: 150,000 pages
 - 5851-7202

6. Verify that the correct print driver for this printer is installed. Check the program to make sure that the print driver for this printer is used. The print driver is on the CD that came with the printer, or can be downloaded from this website: www.hp.com/support/colorljM652, www.hp.com/support/colorljM653, www.hp.com/support/colorljE65050, www.hp.com/support/colorljE65060, www.hp.com/support/colorljE65150, www.hp.com/support/colorljE65160, www.hp.com/support/colorljM681MFP, www.hp.com/support/colorljM682MFP, www.hp.com/support/colorljE67550MFP, www.hp.com/support/colorljE67560MFP, www.hp.com/support/colorljE67650MFP, or www.hp.com/support/colorljE67660MFP.
7. Print a short document from a different program that has worked in the past. If this solution works, the problem is with the program. If this solution does not work (the document does not print), complete these steps:
 - a. Try printing the job from another computer that has the printer software installed.
 - b. If the printer is connected to the network, connect the printer directly to a host computer with a USB cable. Redirect the printer to the correct port, or reinstall the software (make sure to select the new connection type).

Print configuration report



NOTE: Depending on the model, up to three pages print when printing a configuration page. In addition to the main configuration page, the HP embedded Jetdirect configuration pages print.

Print the configuration page from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, select [Reports](#).
2. Select [Configuration/Status Pages](#).
3. Select [Configuration Page](#).
4. Select [Print](#) to print the pages.



TIP: Multiple report pages can be selected, and then printed together.

Print the configuration page from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the arrow keys to navigate to [Reports](#), and then select [OK](#).
2. Select [Configuration/Status Pages](#), and then select [OK](#).
3. Select [Configuration Page](#), and then select [OK](#).
4. Select [Print](#), and then select [OK](#) to print the pages.




TIP: Multiple report pages can be selected, and then printed together.

Print settings menu map

To more easily navigate individual settings, print a report of the complete menu system.

Print the settings menu map from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, select [Reports](#).
2. Select [Configuration/Status Pages](#).
3. Select [Settings Menu Map](#).
4. Select [Print](#) to print the report.

 **TIP:** Multiple report pages can be selected, and then printed together.

Print the menu map from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the arrow keys to navigate to [Reports](#), and then select [OK](#).
2. Select [Configuration/Status Pages](#).
3. Select [Settings Menu Map](#), and then select [OK](#).
4. Select [Print](#), and then select [OK](#) to print the pages.


 **TIP:** Multiple report pages can be selected, and then printed together.

Print current settings pages

Printing the current settings page provides a map of the user configurable settings that might be helpful in the troubleshooting process.


Print the current settings page from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, select [Reports](#).
2. Select [Configuration/Status Pages](#).
3. Select [Current Settings Page](#).
4. Select [Print](#) to print the report.

 **TIP:** Multiple report pages can be selected, and then printed together.

Print the current settings page from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use arrow keys to navigate to [Reports](#), and then select [OK](#).
2. Select [Configuration/Status Pages](#).
3. Select [Current Settings Page](#), and then select [OK](#).
4. Select [Print](#), and then select [OK](#) to print the pages.

 **TIP:** Multiple report pages can be selected, and then printed together.

Print event log

Printing the event log might be helpful in the troubleshooting process. For more information, see the Interpret control panel messages and event log entries section in the printer troubleshooting manual.

Print the event log from the Troubleshooting menu from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, select [Support Tools](#) .
2. Select [Troubleshooting](#).
3. Select [Event Log](#).
4. The event log displays on the screen. Select [Print](#) to print the page.

Print the event log from the Troubleshooting menu from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the arrow keys to navigate to [Support Tools](#), and then select [OK](#).
2. Select [Troubleshooting](#), and then select [OK](#).
3. Select [Event Log](#).
4. Select [Print](#), and then select [OK](#) to print the page.

Print the event log from the Service menu from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, select [Support Tools](#) .
2. Select [Service](#).
3. On the sign-in screen, select the [Service Access Code](#) option from the drop-down list.
4. Enter the following service access code for the printer:
 - 05065217 (M652/E65050/E65150)
 - 05065317 (M653/E65060/E65160)
 - 05068117 (M681/E67550/E67650)
 - 05068217 (M682/E67560/E67660)
5. Select [Event Log](#).
6. The event log displays on the screen. Select [Print](#) to print the page.

Print the event log from the Service menu from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the arrow keys to navigate to [Support Tools](#), and then select [OK](#).
2. Select [Service](#), and then select [OK](#).
3. On the sign-in screen, select [Service Access Code](#) from the drop-down list.
4. Enter the following service access code for the printer:

- 05065217 (M652/E65050/E65150)
 - 05065317 (M653/E65060/E65160)
 - 05068117 (M681/E67550/E67650)
 - 05068217 (M682/E67560/E67660)
5. Select [Event Log](#).
 6. Select [Print](#), and then select [OK](#) to print the page.

Clear the event log from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, select [Support Tools](#).
2. Open the [Service](#) menu.
3. On the sign-in screen, select [Service Access Code](#) from the drop-down list.
4. Enter the following service access code for the printer:
 - 05065217 (M652/E65050/E65150)
 - 05065317 (M653/E65060/E65160)
 - 05068117 (M681/E67550/E67650)
 - 05068217 (M682/E67560/E67660)
5. Select [Event Log](#).
6. Select [Clear](#), and then select [OK](#).

Clear the event log from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the arrow keys to navigate to [Support Tools](#), and then select [OK](#).
2. Select [Service](#), and then select [OK](#).
3. On the sign-in screen, select [Service Access Code](#) from the drop-down list, and then select [OK](#).
4. Enter the following service access code for the printer:
 - 05065217 (M652/E65050/E65150)
 - 05065317 (M653/E65060/E65160)
 - 05068117 (M681/E67550/E67650)
 - 05068217 (M682/E67560/E67660)
5. Select [Event Log](#).
6. Select [Clear](#), and then select [OK](#).

Pre-boot menu options

The **Pre-boot** menus are available prior to the printer initializing.

CAUTION: The **Format Disk** option (printers with a hard-disk drive only) performs a disk initialization for the entire disk. The operating system, firmware files, and third party files (among other files) will be completely lost. HP does not recommend this action.

TIP: The Pre-boot menu can be remotely accessed by using a telnet network protocol to establish an administration connection to the printer. See [Remote Admin on page 115](#).

Open the Pre-boot menu from a touchscreen control panel


1. Touch the middle of the control panel display when you see the 1/8 under the logo.

Figure 2-1 Open the Pre-boot menu



2. On the **Pre-boot** menu screen, use the following buttons to navigate the tests.

Figure 2-2 Pre-boot menu

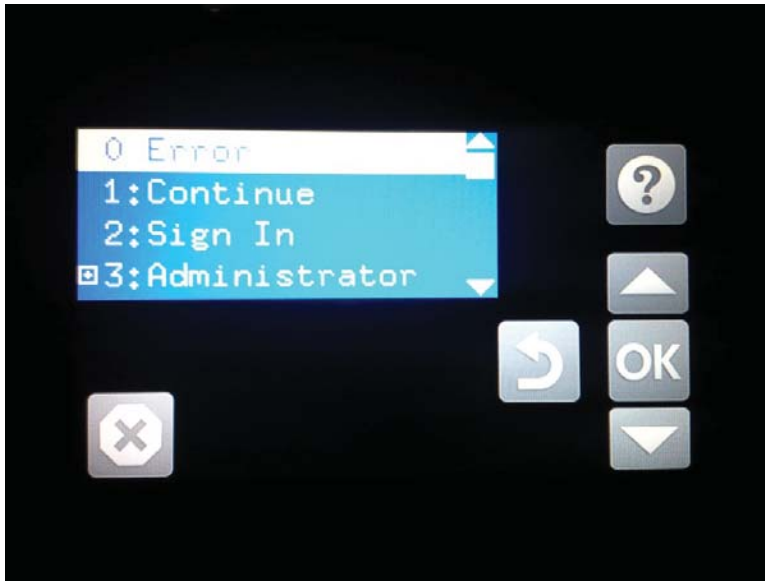

Use this button to see more information about a selected item.



Use this button to scroll up through menu items.



Use this button to select a highlighted menu item.



Use this button to scroll down through menu items.



Use this button to go back to the previous menu.




Not used.



Use this button to exit a diagnostic test.

3. Use the arrow buttons on the touchscreen to navigate the [Pre-boot](#) menu.
4. Select [OK](#) to select a menu item.

Open the Pre-boot menu from an LCD control panel


1. Press the [Cancel](#)  button when you see the [1/8](#) under the logo.
2. Use the arrow buttons on the control panel to navigate the [Pre-boot](#) menu.
3. Select [OK](#) to select a menu item.




Cold reset using the Pre-boot menu from a touchscreen control panel

 **CAUTION:** This procedure resets all printer configurations and settings to factory defaults (customer configurations and settings are lost).

1. Touch the middle of the control panel display when you see the [1/8](#) under the logo.

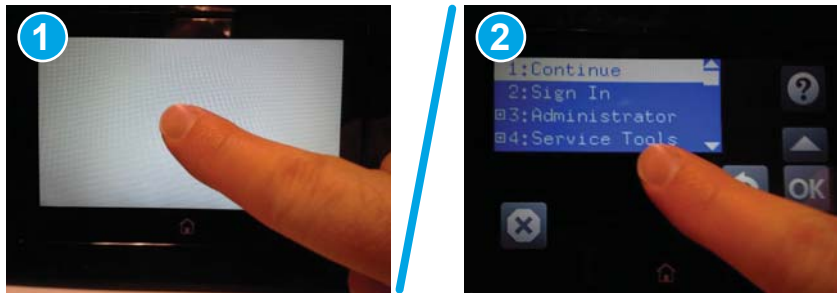Figure 2-3 Open the Pre-boot menu







2. Use the  button to highlight the [+3:Administrator](#) item, and then touch the [OK](#).
3. Use the  button to highlight the [+8:Startup Options](#) item, and then select [OK](#).
4. Use the  button to highlight the [2 Cold Reset](#) item, and then select [OK](#) to select it.
5. Select Home to return to the main [Pre-boot](#) menu and highlight the [1:Continue](#) item, and then select [OK](#).

 **NOTE:** The printer will initialize.

Cold reset using the Pre-boot menu from an LCD control panel

 **CAUTION:** This procedure resets all printer configurations and settings to factory defaults (customer configurations and settings are lost).

1. Press the [Cancel](#)  button when you see the [1/8](#) under the logo.
2. Use the down arrow  button to highlight the [+3:Administrator](#) item, and then select [OK](#).
3. Use the down arrow  button to highlight the [+8:Startup Options](#) item, and then select [OK](#).
4. Use the down arrow  button to highlight the [2 Cold Reset](#) item, and then select [OK](#).
5. Select the Home to return to the main [Pre-boot](#) menu and highlight the [1:Continue](#) item, and then select [OK](#).

 **NOTE:** The printer will initialize.


 **NOTE:** Some of the pre-boot options in the following tables are not supported by the current version of the printer firmware and are included for information only. Future versions of firmware will support these options.

Table 2-1 Pre-boot menu options (1 of 7)

| Menu option | First level | Second level | Third level | Description |
|---------------|---------------|----------------------------------|-------------|---|
| Continue | | | | Selecting the Continue item exits the Pre-boot menu and continues the normal boot process. If a selection is not made in the initial menu within 30 seconds, the printer returns to a normal boot (the same as selecting Continue). If the user navigates to another menu, the timeout does not apply. |
| Sign In | | | | Enter the administrator PIN or service PIN if one is required to open the Pre-boot menu. |
| Administrator | | | | This item navigates to the Administrator submenus. If authentication is required (and the user is not already signed in) the Sign In prompt displays. The user is required to sign in. |
| | Download | Network USB USB Thumbdrive | | This item initiates a Pre-boot firmware download process. A USB Thumbdrive option will work on all FutureSmart printers. USB or Network connections are not currently supported. |
| | Format Disk | | | This item reinitializes the disk and cleans all disk partitions. CAUTION: Selecting the Format Disk item removes all data. A delete confirmation prompt is not provided. The system is not bootable after this action and a 99.09.67 error displays on the control panel. A firmware download must be performed to return the system to a bootable state. |
| | Partial Clean | | | This item reinitializes the disk (removing all data except the firmware repository where the master firmware bundle is downloaded and saved). CAUTION: Selecting the Partial Clean item removes all data except the firmware repository. A delete confirmation prompt is not provided. CAUTION: This procedure resets all printer configurations and settings to factory defaults (customer configurations and settings are lost). This allows a user to reformat the disk by removing the firmware image from the active directory without having to download new firmware code (printer remains bootable). |

Table 2-1 Pre-boot menu options (1 of 7) (continued)

| Menu option | First level | Second level | Third level | Description |
|---------------|-----------------|--------------|-------------|---|
| Administrator | Change Password | | | Select this item to set or change the administrator password. |
| (continued) | Clear Password | | | Select the Clear Password item to remove a password from the control panel menus. Before the password is actually cleared, a message will be shown asking to confirm that the password should be cleared. Select OK to confirm the action. When the confirmation prompt displays, select OK to clear the password. |

Table 2-2 Pre-boot menu options (2 of 7)

| Menu option | First level | Second level | Third level | Description |
|---------------|-------------|-----------------|--------------|---|
| Administrator | Manage Disk | Clear disk | | Select the Clear disk item to enable using an external device for job storage. Job storage is normally enabled only for the Boot device. This will be grayed out unless the 99.09.68 error is displayed. |
| (continued) | | Lock Disk | | Select the Lock Disk item to lock (mate) a new secure disk to this printer. The secure disk already locked to this printer will remain accessible to this printer. Use this function to have more than one encrypted disk accessible by the printer when using them interchangeably. The data stored on the secure disk locked to this printer always remains accessible to this printer. |
| | | Leave Unlocked | | Select the Leave Unlocked item to use a new secure disk in an unlocked mode for a single service event. The secure disk that is already locked to this printer will remain accessible to this printer and uses the old disk's encryption password with the new disk. The secure disk that is already locked to this printer remains accessible to this printer. |
| | | Clear Disk Pwd | | Select the Clear Disk Pwd item to continue using the non-secure disk and clear the password associated with the yet-to-be installed secure disk. CAUTION: Data on the missing secure disk will be permanently inaccessible. |
| | | Retain Password | | Select the Retain Password item to use the non-secure disk for this session only, and then search for the missing secure disk in future sessions. |
| | Boot Device | | Secure Erase | Select the Secure Erase item to erase all of the data on the disk and unlock it if required. This might take a long time. NOTE: The system will be unusable until the system files are reinstalled. The ATA secure-erase command is a one-pass overwrite, which erases the entire disk including firmware. The disk remains an encrypted disk. |

Table 2-2 Pre-boot menu options (2 of 7) (continued)

| Menu option | First level | Second level | Third level | Description |
|------------------------------|----------------------------|----------------------------|--------------|---|
| Administrator (continued) | Manage Disk (continued) | Boot Device (continued) | Erase/Unlock | Select the Erase/Unlock item to cryptographically erase all data on the disk and unlock the disk to allow a user to gain access to it from any printer. NOTE: The system will be unusable until the system files are reinstalled. It erases the encryption key. The encryption key is erased, so the disk becomes a non-encrypted disk. |
| | | | Get Status | This item provides disk status information if any is available. |

Table 2-3 Pre-boot menu options (3 of 7)

| Menu option | First level | Second level | Third level | Description |
|------------------------------|----------------------------|-----------------|--------------|--|
| Administrator (continued) | Manage Disk (continued) | Internal Device | | Select the Internal Device item to erase the internal device or get a status about the internal device. |
| | | | Secure Erase | Select the Secure Erase item to erase all of the data on the disk and unlock it if required. This might take a long time. NOTE: The system will be unusable until the system files are reinstalled. The ATA secure-erase command erases the entire disk, including firmware. The disk remains an encrypted disk. |
| | | | Erase/Unlock | Select the Erase/Unlock item to cryptographically erase all of the data on disk and unlock the disk to allow the user to gain access to it from any printer. NOTE: The system will be unusable until the system files are reinstalled. The HP High Performance Secure Hard Disk is erased. |
| | | | Get Status | This item provides disk status information if any is available. |
| | | External Device | | Select the External Device item to erase the external device or get status about the external device. |
| | | | Secure Erase | Select the Secure Erase item to erase all of the data on the disk and unlock it if required. This might take a long time. NOTE: The system will be unusable until the system files are reinstalled. The ATA secure-erase command erases the entire disk, including firmware. The disk remains an encrypted disk. |
| | | | Erase/Unlock | Select the Erase/Unlock item to cryptographically erase all of the data on disk and unlock the disk to allow a user to gain access to it from any printer. NOTE: The system will be unusable until the system files are reinstalled. The encryption key is erased, so the disk becomes a non-encrypted disk. |
| | | | Get Status | This item provides disk status information if any is available. |

Table 2-4 Pre-boot menu options (4 of 7)

| Menu option | First level | Second level | Third level | Description |
|---------------|--|------------------|-----------------|---|
| Administrator | Configure LAN | IP Mode [DHCP] | | The network can be configured to obtain the network settings from a DHCP server or as static. |
| (continued) | NOTE: This configuration is only active when the Pre-boot menu is open. | IP Mode [STATIC] | | Use this item for automatic IP address acquisition from the DHCP server. |
| | | | | Use this item to manually assign the network addresses. |
| | | | IP Address | Use this item to manually enter the IP addresses. |
| | | | Subnet Mask | Use this item to manually enter the subnet mask. |
| | | | Default Gateway | Use this item to manually enter the default gateway. |
| | | | Save | Select the Save item to save the manual settings. |

Table 2-5 Pre-boot menu options (5 of 7)

| Menu option | First level | Second level | Third level | Description |
|---------------|-----------------|--------------------------------|-------------|--|
| Administrator | Startup Options | | | Select the Startup Options item to specify options that can be set for the next time the printer is turned on and initializes to the Ready state. |
| (continued) | | Show Revision | | <p>Not currently functional: Select the Show Revision item to allow the printer to initialize and show the firmware version when the printer reaches the Ready state.</p> <p>Once the printer power is turned on the next time, the Show Revision item is unchecked so that the firmware revision is not shown.</p> |
| | | Cold Reset | | <p>Select the Cold Reset item to clear the IP address and all customer settings. (This item also returns all settings to factory defaults.)</p> <p>NOTE: Items in the Service menu are not reset.</p> |
| | | Skip Disk Load | | Select the Skip Disk Load item to disable installed third-party applications. |
| | | Skip Cal | | Select the Skip Cal item to skip the printer calibration for the very next power-initialization cycle only. |
| | | Lock Service | | <p>CAUTION: Select the Lock Service item to lock the Service menu access (both in the Pre-boot menu and the Device Maintenance menu).</p> <p>Service personnel must have the administrator remove the Lock Service setting before they can open the Service menu.</p> |
| | | Skip FSCK | | Select the Skip FSCK item to disable Chkdisk/ScanVolume during startup. |

Table 2-5 Pre-boot menu options (5 of 7) (continued)

| Menu option | First level | Second level | Third level | Description |
|------------------------------|--------------------------------|------------------------|-------------|---|
| Administrator (continued) | Startup Options (continued) | First Power | | <p>Not currently functional: This item allows the printer to initialize as if it is the first time it has been turned on.</p> <p>For example, the user is prompted to configure first-time settings like date/time, language, and other settings.</p> <p>Select this item so that it is enabled for the next time the printer power is turned on.</p> <p>When the printer power is turned on the next time, this item is unchecked so that the pre-configured settings are used during configuration, and the first-time setting prompt is not used.</p> |
| | | Embedded Jetdirect Off | | <p>Select the Embedded Jetdirect Off item to disable the embedded HP Jetdirect.</p> <p>By default this item is unchecked so that HP Jetdirect is always enabled.</p> |
| | | WiFi Accessory | | <p>Select the WiFi Accessory item to enable the wireless accessory.</p> |

Table 2-6 Pre-boot menu options (6 of 7)

| Menu option | First level | Second level | Third level | Description |
|------------------------------|-------------|--------------|-------------|--|
| Administrator (continued) | Diagnostics | | | <p>Diagnostic items are useful to diagnose hardware components and their interface connections. Use these items to troubleshoot specific hardware components, and the interface between them and other components.</p> |
| | | Memory | Do Not Run | <p>Use the Do Not Run item to exclude the Memory diagnostic when executing multiple diagnostics.</p> |
| | | | Short | <p>Use the Short item to select a brief memory test.</p> <p>NOTE: This test requires about four minutes to execute.</p> |
| | | | Long | <p>Use the Long item to select an extended memory test.</p> <p>NOTE: This test requires about twenty minutes to execute.</p> |
| | | Disk | Do Not Run | <p>Use the Do Not Run item to exclude the Disk diagnostic when executing multiple diagnostics.</p> |
| | | | Short | <p>Use the Short item to select a brief firmware self-test.</p> <p>NOTE: This test requires about two or three minutes to execute.</p> |
| | | | Long | <p>Use the Long item to select an extended firmware self-test.</p> <p>NOTE: This test requires about sixty minutes to execute.</p> |

Table 2-6 Pre-boot menu options (6 of 7) (continued)

| Menu option | First level | Second level | Third level | Description |
|------------------------------|----------------------------|---------------------|-------------|---|
| Administrator (continued) | Diagnostics (continued) | Disk (continued) | Optimized | Use the Optimized item to select a test that checks the active sectors on the disk. NOTE: This test requires about thirty minutes to execute. |
| | | | Raw | Use the Raw item to select a test that checks every sector on the disk. NOTE: This test requires about fifty minutes to execute. |
| | | | Smart | Use the Smart item to select a very brief test that checks the drive self-monitoring analysis and reporting technology (SMART) status—the drive detects and reports reliability indicators to help anticipate disk failures (SMART status). |
| | | CPB | | Use the CPB item to verify the integrity of the copy processor board (CPB) and the formatter PCA connections. |
| | | Run Selected | | Select the Run Selected item to execute a selected test. NOTE: If more than one test is selected, they are executed in sequence. |

Table 2-7 Pre-boot menu options (7 of 7)


| Menu option | First level | Second level | Third level | Description |
|------------------------------|----------------|---------------|-------------|---|
| Administrator (continued) | Remote Admin | Start Telnnet | | The Remote Admin item allows a service technician to access to the printer Pre-boot menu remotely, and to navigate the menu selections from a remote location. IMPORTANT: A Remote Admin connection must be initiated by a person that is physically present at the printer. This person will also need to provide a randomly generated PIN to the remote service technician. NOTE: For more information about using the Remote Admin function, see Remote Admin on page 115 . |
| | | Stop Telnnet | | |
| | | Refresh IP | | |
| | System Triage | Copy Logs | | If the printer will not boot to the Ready state, or the diagnostic log feature found in the Troubleshooting menu is not accessible, then use the System Triage item to copy the diagnostic logs to a USB flash drive at the next printer start up. The files can then be sent to HP to help diagnose the problem. |
| | Change Svc PWD | | | Use this item to change the Service menu personal identification number (PIN). |
| | Reset Svc PWD | | | If the Service menu personal identification number (PIN) has been changed, use this item to reset it to the original PIN. |

Table 2-7 Pre-boot menu options (7 of 7) (continued)

| Menu option | First level | Second level | Third level | Description |
|-----------------|----------------|--------------|-------------|---|
| Service Tools | Reset Password | | | Use this item to reset the Pre-boot administrator password. |
| | Subsystems | | | For manufacturing use only. Do not change these values. |
| Developer Tools | Netexec | | | For development use only. Do not change these values. |

Remote Admin

The Remote Admin feature allows remote access the printer Pre-boot menu (BIOS environment). The printer functions as a telnet server which uses the telnet networking protocol to transmit text data. Any computer (with telnet installed and enabled) can function as the telnet client to remotely display and interact with the Pre-boot menu.

 **IMPORTANT:** While the Remote Admin function allows remote access the Pre-boot menu, for security reasons the Remote Admin connection must be initiated by a person that is physically present at the printer.

This section describes the following Remote Admin items.

- [Required software and network connection](#)
- [Connect a remote connection](#)
- [Disconnect a remote connection](#)

Required software and network connection

Before using the Remote Admin feature, make sure that the telnet network protocol is installed, and enabled, on the remote telnet client computer.


 **NOTE:** This section describes enabling and configuring the telnet feature for computers using a Windows® operating system.

HP recommends that the telnet client computer be a Windows based system, however, there are other operating systems that support the telnet network protocol. For information about enabling and configuring the telnet network protocol for other operating systems, see the owner's manual for that operating system.

Telnet client


Enable the Windows telnet client

All computers using the Windows operating system have the telnet client installed, however, the telnet client function might not be enabled by default.

 **NOTE:** The figures and menus in this section are for the Windows 7 Enterprise® operating system. Screens and menu selections might vary slightly for other operating systems.


1. Use the **Start** menu to open the **Control Panel**, and then click the **Programs** item to select it.

Figure 2-4 Open the Control Panel

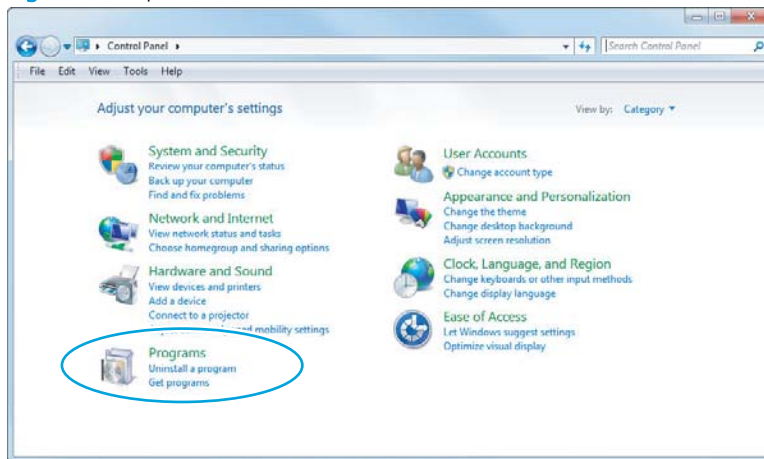

2. Click the **Turn Windows features on or off** item to select it.

Figure 2-5 Turn Windows features on or off

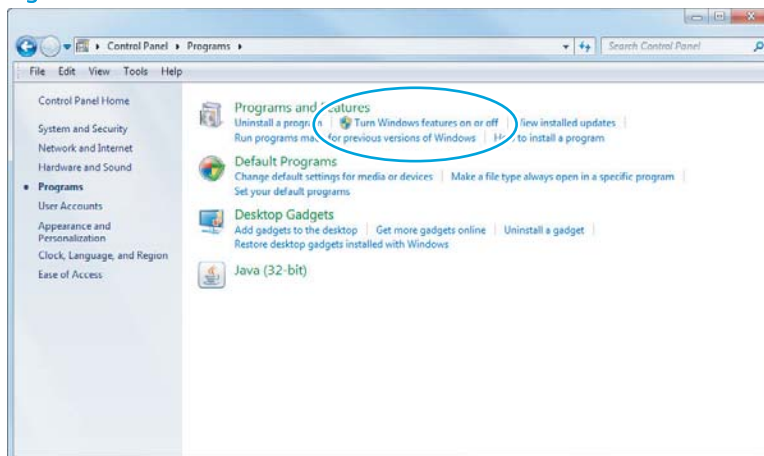

3. In the **Windows Features** box, scroll down to **Telnet Client**. If the check box is not checked, click the box to select it, and then click the **OK** button.


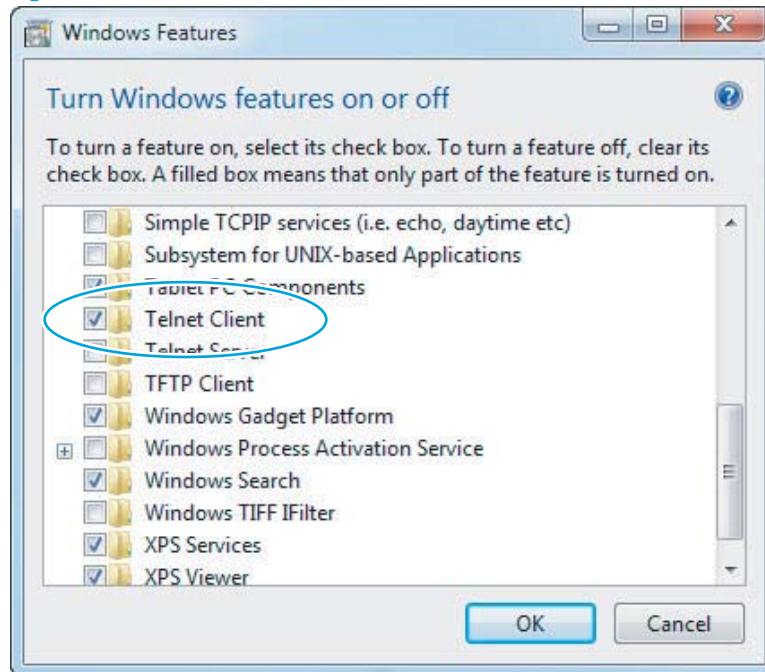
 **TIP:** If the check box is already checked then the telnet client function is already enabled. Click the **Cancel** button.

Figure 2-6 Enable the telnet client feature



Network connection


The remote telnet client computer must have direct network access to the printer for the Remote Admin function to operate. This means that the telnet client computer must be on the same network as the printer. The Remote Admin function cannot be accessed through a network firewall or other remote access network security programs.

If a private network is not accessible, ask the network administrator to set up a virtual private network (VPN) connection to the network.

Connect a remote connection

Start the telnet server function at the printer


For security reasons the Remote Admin feature must be initiated by a person that is physically present at the printer. The following steps must be performed by a person that is physically present at the printer.

 **NOTE:** This person might need to sign in with an administrator or service password depending on how the printer is configured.

1. Turn the printer on.
2. The HP logo displays on the printer control panel. When a "1/8" with an underscore displays, touch the middle of the screen to open the **Pre-boot** menu.


- Use the arrow buttons on the touchscreen to scroll down and highlight the **+3:Administrator** item, and then touch the **OK** button to select it.

Figure 2-7 Select the +3:Administrator item

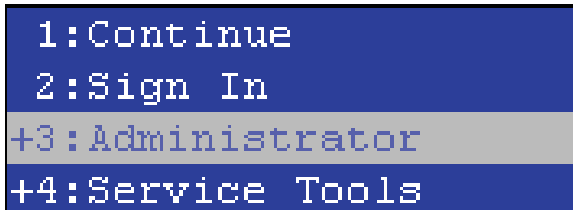


- Use the arrow buttons on the touchscreen to scroll down and highlight the **+A:Remote Admin** item, and then touch the **OK** button to select it.

Figure 2-8 Select the +A:Remote Admin item

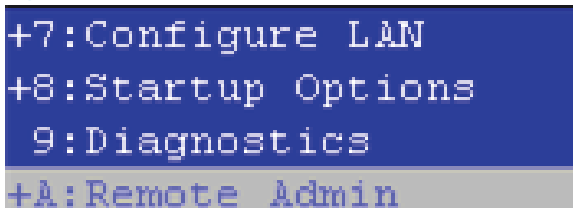


- Use the arrow buttons on the touchscreen to scroll down and highlight the **1:Start Telnet** item, and then touch the **OK** button to select it.

Figure 2-9 Select the 1:Start Telnet item

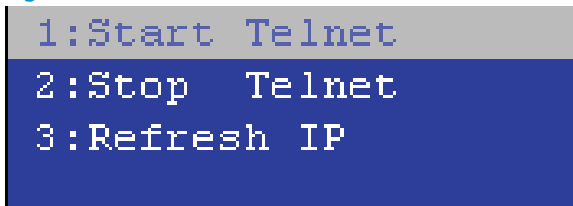


- Do one of the following
 - If a connecting message displays briefly, go to step [7](#).

Figure 2-10 Telnet connecting message

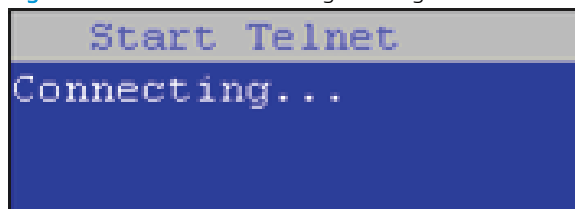

- If an error message displays, use the steps below to identify the problem.

Figure 2-11 Telnet error message

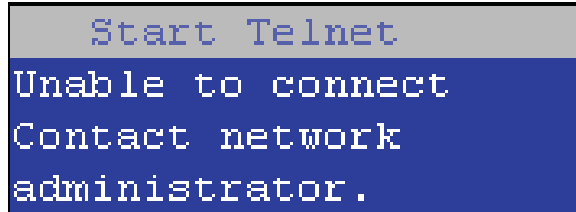


- a. The printer network cable is not correctly connected.
 - b. The BIOS LAN settings are incorrect.
 - o The printer should be configured to use a static IP address, but is configured to use DHCP instead.
 - o The printer is configured to use a static IP address, but the IP address is incorrect.
 - c. The printer is correctly configured to use DHCP, but the DHCP server is not turned on or is malfunctioning.
7. When the printer telnet server function is initialized, the following screen appears. Use the information on this screen to connect the remote telnet client computer to the printer.

 **NOTE:** The printer is now ready to receive remote telnet client commands.

- **IP:** The static or dynamically allocated IP address for the printer.
- **Port:** The standard telnet port (23).
- **Pin:** A randomly generated 4-digit personal identification number (PIN).

Figure 2-12 Telnet server function initialized

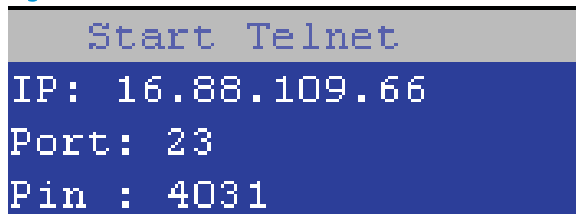


Start the telnet client function at the remote computer

The following steps establish a Remote Admin connection from a remote computer to the printer.


1. From the **Start** menu click **Run** to open a dialog box, type `cmd` in the **Open** field, and then click the **OK** button to open a Windows command window.

Figure 2-13 Open a command window

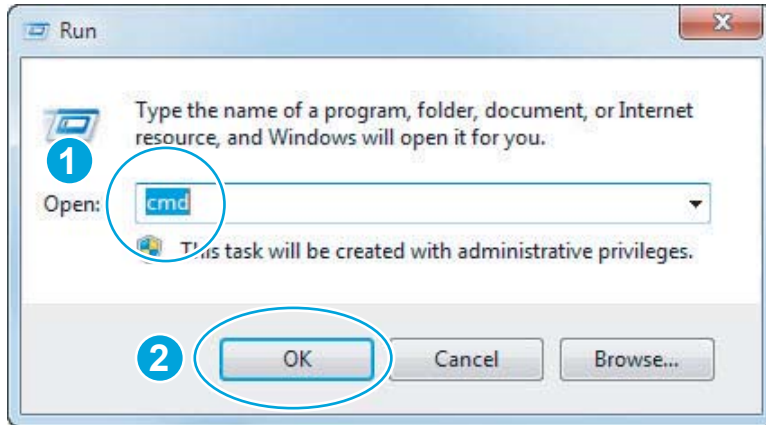


2. From any displayed directory, type `telnet` at the prompt, and then press the **Enter** key.

Figure 2-14 Start a telnet session

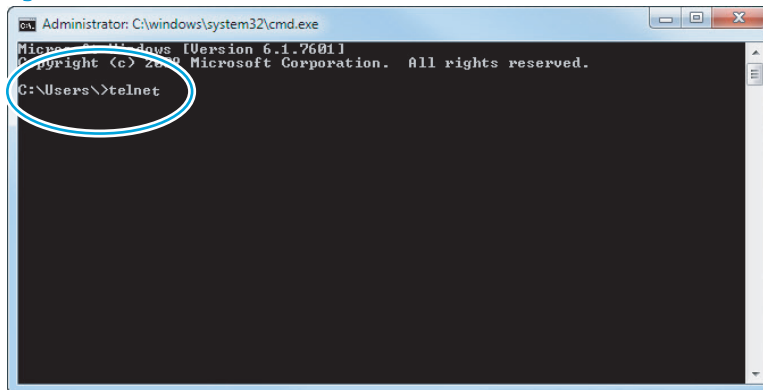

3. Type `<IP ADDRESS>` at the telnet prompt, and then press the **Enter** key.

 **NOTE:** For `<IP ADDRESS>`, substitute the IP address that was displayed in step 7 in [Start the telnet server function at the printer on page 117](#).


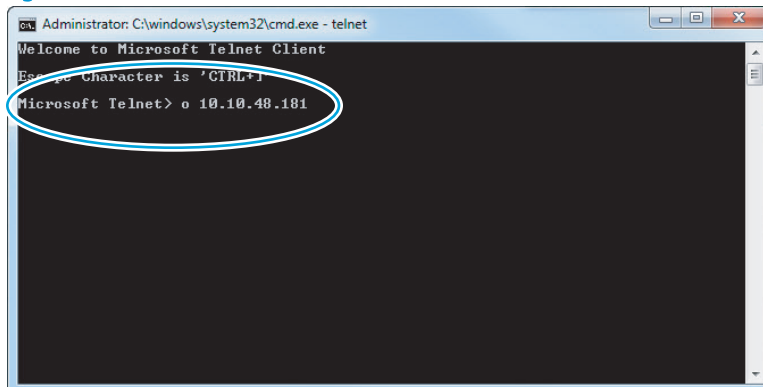
 **TIP:** If the telnet connection fails to establish a connection, the printer is probably behind a firewall or on a different network than the remote telnet client computer. See [Network connection on page 117](#).

Figure 2-15 Establish a telnet connection



4. Type the PIN that was displayed in step 7 in [Start the telnet server function at the printer on page 117](#) at the prompt, and then press the **Enter** key.


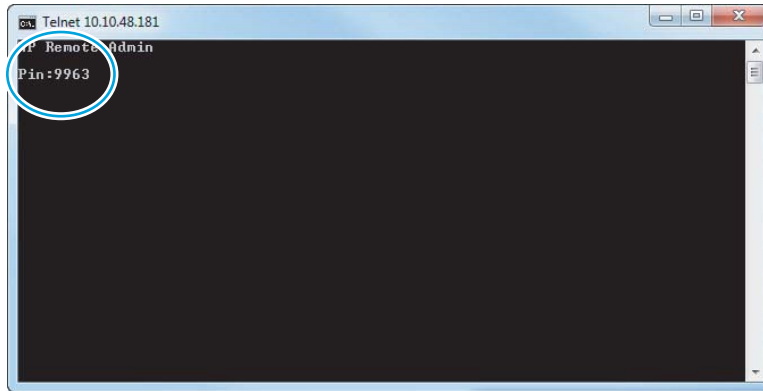

 **IMPORTANT:** Make sure to type the PIN correctly. After five incorrect PIN entries, the printer terminates the Remote Admin connection. The Remote Admin feature must be re-initiated at the printer. See [Start the telnet server function at the printer on page 117](#).

Figure 2-16 Enter the PIN




5. The following screen displays when the correct PIN is entered and the Remote Admin connection is successful. For information about the Pre-boot menu and options, see [Pre-boot menu options on page 105](#).

 **NOTE:** Because a Remote Admin connection is an unsecure telnet network protocol connection, the following Pre-boot menu items are disabled for the remote telnet client computer.


- The **+3:Administrator** menu **4:Change Password** item.
- The **+3:Administrator** menu **5:Clear Password** item.
- The **+3:Administrator** menu **6:Disk Manage** item.

Figure 2-17 Remote Admin window

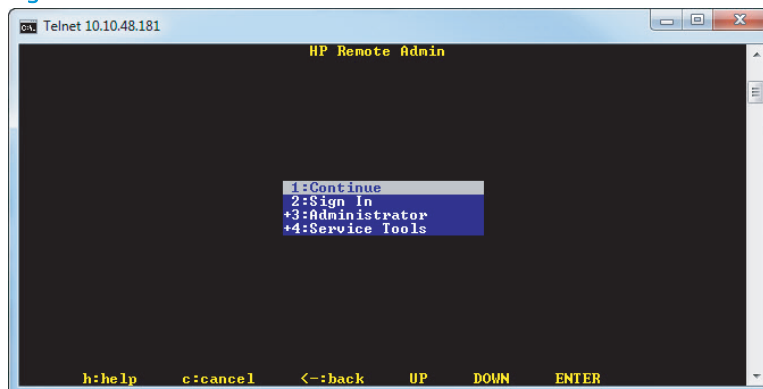


Disconnect a remote connection

The Remote Admin connection can be terminated from the printer control panel or the remote telnet client computer.

 **NOTE:** The following procedure describes terminating a Remote Admin connection from the remote telnet client computer.


1. From the Pre-boot main menu, use the arrow buttons on the keyboard to scroll down to the **+3:Administrator** item, and then press the **Enter** key.

Figure 2-18 Access the administrator menu

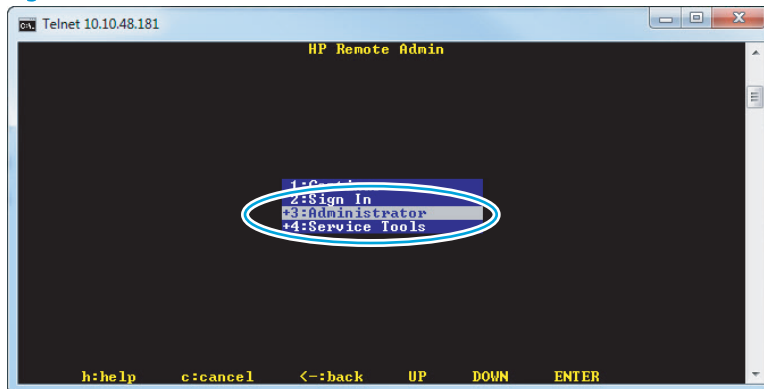


2. Use the arrow buttons on the keyboard to scroll down to the **+A:Remote Admin** item, and then press the **Enter** key.

Figure 2-19 Access the remote admin menu

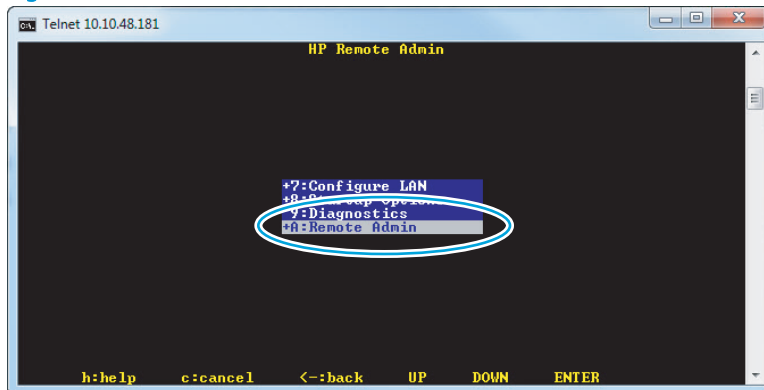

3. Use the arrow buttons on the keyboard to scroll down to the **2:Stop Telnet** item, and then press the **Enter** key. The Remote Admin connection between the printer and the remote telnet client computer terminates.

 **IMPORTANT:** The printer remains in the Pre-boot menu. Have the person that is physically present at the printer do the following:

- Touch the **Home** button to return to the main Pre-boot menu and highlight the **1:Continue** item, and then touch the **OK** button. The printer will continue to initialize.

Figure 2-20 Terminate the telnet connection



Troubleshooting process

Determine the problem source

When the printer malfunctions or encounters an unexpected situation, the printer control panel alerts you to the situation. This section contains a pre-troubleshooting checklist to filter out many possible causes of the problem. A troubleshooting flowchart helps you diagnose the root cause of the problem. The remainder of this chapter provides steps for correcting problems.

- Use the troubleshooting flowchart to pinpoint the root cause of hardware malfunctions. The flowchart guides you to the section of this chapter that contains steps for correcting the malfunction.

Before beginning any troubleshooting procedure, check the following issues:

- Are supply items within their rated life?
- Are supply items Genuine HP supplies?
- Does the configuration page reveal any configuration errors?



NOTE: The customer is responsible for checking supplies and for using supplies that are in good condition.

Troubleshooting flowchart

This flowchart highlights the general processes that you can follow to quickly isolate and solve printer hardware problems.

Each row depicts a major troubleshooting step. A “yes” answer to a question allows you to proceed to the next major step. A “no” answer indicates that more testing is needed. Go to the appropriate section in this chapter, and follow the instructions there. After completing the instructions, go to the next major step in this troubleshooting flowchart.

Table 2-8 Troubleshooting flowchart

| | | | |
|------------------------------------|---|------|--|
| 1 Power on | Is the printer on and does a readable message display? | | Follow the power-on troubleshooting checks. See Power subsystem on page 126 . After the control panel display is functional, see step 2. |
| | Yes ↓ | No → | |
| 2 Control panel messages | Does the message Ready display on the control panel? | | After the errors have been corrected, go to step 3. See the control panel messages document (CPDM) on the printer support website. |
| | Yes ↓ | No → | |
| 3 Event log | Open the Troubleshooting menu and print an event log to see the history of errors with this printer. Does the event log print? | | If the event log does not print, check for error messages. See the control panel messages document (CPDM) on the printer support website. If paper jams inside the printer, clear the jam. See the clear paper jams section of the printer troubleshooting manual. If error messages display on the control panel when you try to print an event log, see the control panel messages document (CPDM) in the printer troubleshooting manual. After successfully printing and evaluating the event log, see step 4. |
| | Yes ↓ | No → | |
| 4 Information pages | Open the Reports menu and print the configuration pages to verify that all the accessories are installed. Are all the accessories installed? | | If accessories that are installed are not listed on the configuration page, remove the accessory and reinstall it. After evaluating the configuration pages, see step 5. |
| | Yes ↓ | No → | |
| 5 Print quality | Does the print quality meet the customer's requirements? | | Compare the images with the print quality report. See the solve image quality section of the printer troubleshooting manual After the print quality is acceptable, see step 6. |
| | Yes ↓ | No → | |
| 6 Interface | Can the customer print successfully from the host computer? | | Verify that all I/O cables are connected correctly and that a valid IP address is listed on the HP Jetdirect configuration page. If error messages display on the control panel when you try to print an event log, see the control panel messages document (CPDM) on the printer support website. When the customer can print from the host computer, this is the end of the troubleshooting process. |
| | Yes. This is the end of the troubleshooting process. | No → | |

Power subsystem

Power-on checks

The basic printer functions should start up when the printer is connected into an electrical outlet and the power switch is pushed to the *on* position. If the printer does not start, use the information in this section to isolate and solve the problem.

If the control panel display remains blank, random patterns display, or asterisks remain on the control panel display, perform power-on checks to find the cause of the problem.

Power-on troubleshooting overview

During normal operation, a cooling fan begins to spin briefly after the printer power is turned on. Place your hand over the vents at the rear of the printer, next to the formatter, or on the rear of the scanner (MFPs only). If the fan is operating, you will feel air passing out of the printer. You can lean close to the printer and hear the fan operating.

After the fan is operating, the main motor turns on (unless the left door or cartridge access door is open, a jam condition is sensed, or the paper-path sensors are damaged). You might be able to visually and audibly determine if the main motor is turned on.

If the fan and main motor are operating correctly, the next troubleshooting step is to isolate print engine, formatter, and control panel problems.

If the control panel is blank when you turn on the printer, check the following items:

1. Make sure that the printer is connected directly into an active electrical outlet (not a power strip) that delivers the correct voltage.
2. Make sure that the power switch is in the *on* position.
3. Make sure that the fan runs briefly, which indicates that the power supply is operational.
4. Make sure that the control panel display wire harness is connected.
5. Make sure the power switch is in the *on* position, and then verify that the heartbeat LED is blinking.
6. Remove any external solutions, and then try to turn the printer on again.

Troubleshooting a blank display, black display, no display, or no power situation

Customers usually report that the control panel display is not showing anything. It is very important to collect as much information as possible from the customer about the issue to help resolve it.

Following are some printer behaviors the customer might encounter:

- The control panel is completely blank (no LEDs or back light).
- The control panel is blank, but there might be LEDs illuminated.
- The control panel is blank (LEDs are on or flashing) and the back light is on (but no text is visible).

Following are some possible causes of a blank control panel display:

- No power to the printer.
- The control panel contrast setting is not correctly adjusted.

- The formatter connector(s) are not fully seated into the connector(s) on the DC controller.
- The memory DIMM is missing, faulty, incorrectly installed, or is not fully seated.
- A faulty component is installed on the formatter (for example a memory DIMM, fax PCA, network PCA, USB device, or other component).
- The formatter is defective.
- The control panel connector is not fully seated, or the control panel is defective.
- The DC controller is defective.

Following are some questions to ask the customer:

- Was the printer newly installed or has the printer been properly functioning?
 - For a new install, investigate to see if there was any shipping damage to the printer.
 - Did the customer notice any damage to the shipping box or any visible damage to the printer?
- What happened just prior to the control panel going blank?
 - Was the printer serviced recently?
 - Has a power outage recently occurred?
 - Has a lightning storm recently occurred?
 - Did the customer recently add a memory DIMM or install a third-party component?
- Make sure to get a complete description of the failure.
 - Is the control panel display completely blank (might be faint text and no back light)?
 - Is the control panel display back light on?
 - Are any of the LEDs (Ready, Data, or Attention) illuminated?
 - Has a print job been sent to the printer? The customer might report that their print jobs seemed to print, but when they go to the printer the control panel display is blank.

Recommended actions

If the control panel display is completely blank (no LEDs illuminated or no back light) check to see if the printer is getting power. Listen for fans or any printer initialization sounds when the power is turned on.

If there are no signs of power, then perform the following:

1. Make sure that the printer is plugged directly into an active electrical outlet (not a power strip or interruptible power supply) that delivers the correct voltage.


 **TIP:** Try using a different power cable if possible.

2. Turn the printer power on, and make sure that the fan(s) run briefly (this indicates that the power supply is operational).
3. Turn the printer power off.

4. Make sure that the control panel display wire harness (and/or flat cable) is properly connected (and fully seated), and then turn the printer power on again.
5. Verify the status LEDs are illuminated, but the control panel display is blank. If applicable: Check if the contrast setting is adjusted to very low. If so, try turning the contrast knob to see if the control panel display becomes visible.
6. From a host computer, send a print job to the printer.


 **NOTE:** If the print job correctly prints, then the problem is most likely to a defective control panel.

7. Turn the printer power off, and then make sure that the memory DIMM is installed in the correct slot and is fully seated.

 **NOTE:** For some printers, there may be more than one memory DIMM installed. Some printers have third-party solutions/applications or fonts that use memory.

8. Remove all of the components/accessories installed on the formatter (for example, hard drive, solid-state drive, memory DIMM(s), fax PCA, network PCA, USB devices, or other devices).


- **For printers with an interconnect board (ICB):** Make sure that the formatter is fully seated.
- Take out or disconnect all removable components on the formatter (SSD, HDD, or other devices).

 **IMPORTANT:** This is important because the formatter or a component on the formatter might be defective or shorted which causes the printer to lose power.

9. **For printers with an interconnect board (ICB):** Reinstall the formatter.


Make sure that all of the connectors on the formatter are correctly connected and fully seated.

10. Turn the printer power on, and then check the control panel display.
11. If the printer control panel is properly working, replace each removed component (one at a time) to determine which one is causing the problem.

 **CAUTION:** Turn the printer power off, and then on again, after replacing a component on the formatter.

12. If the control panel display is still blank after performing the above troubleshooting steps, replace the formatter.

Control panel checks

 **NOTE:** The printer includes a diagnostic test mode for the touchscreen control panels.

- [Control panel diagnostics](#)
- [Control panel diagnostic flowcharts](#)

Control panel diagnostics

- [Touchscreen diagnostic mode](#)
- [Control panel system diagnostics](#)

Touchscreen diagnostic mode

Use the diagnostics in this section to test the control panel hardware and embedded firmware. These tests are useful for checking control panel functionality independent of the printer control panel system diagnostics. To test the control panel using the system diagnostics, see [Control panel system diagnostics on page 132](#).

1. **M652/M653/E65050/E65060/E65150/E65160 models:** Locate the diagnostic-tests access button on the back of the control panel.

Figure 2-21 Diagnostic-tests access button



2. **M681/M682/E67550/E67560/E67650/E67660 models:** Locate the diagnostic-tests access button on the back of the control panel.

Figure 2-22 Diagnostic-tests access button



3. **M681/M682/E67550/E67560/E67650/E67660 only:** Press the diagnostics-access button. Repeatedly pressing the button cycles through the available diagnostics.

Figure 2-23 Press the diagnostics-access button



4. Touch the screen to cycle the screen through the following:
 - Five brightness levels of a white screen.



- A final black screen.

💡 **TIP:** When the final black screen displays, press the Home button to cycle through the diagnostic screens and test its functionality.



5. Pressing the diagnostic-tests button with the black screen displayed, exits the diagnostic mode.

Figure 2-24 Exit the diagnostic mode



Control panel system diagnostics

Use the diagnostics in this section to test the control panel hardware and display using the printer firmware system diagnostics.

- [Open the control panel system diagnostic tests](#)
- [Screen test](#)
- [Touch test](#)
- [SoftKey test](#)
- [Backlight test](#)
- [Sound test](#)
- [Keyboard test \(MFP Flow models only\)](#)
- [Version](#)

Open the control panel system diagnostic tests

Open the control panel system diagnostic tests from a touchscreen control panel


1. Turn the printer power off, and then on again.
2. Touch the middle of the control panel display when you see the 1/8 under the logo.

Figure 2-25 Open the Pre-boot menu



3. On the **Pre-boot** menu screen, use the following buttons to navigate the tests.

Figure 2-26 Pre-boot menu

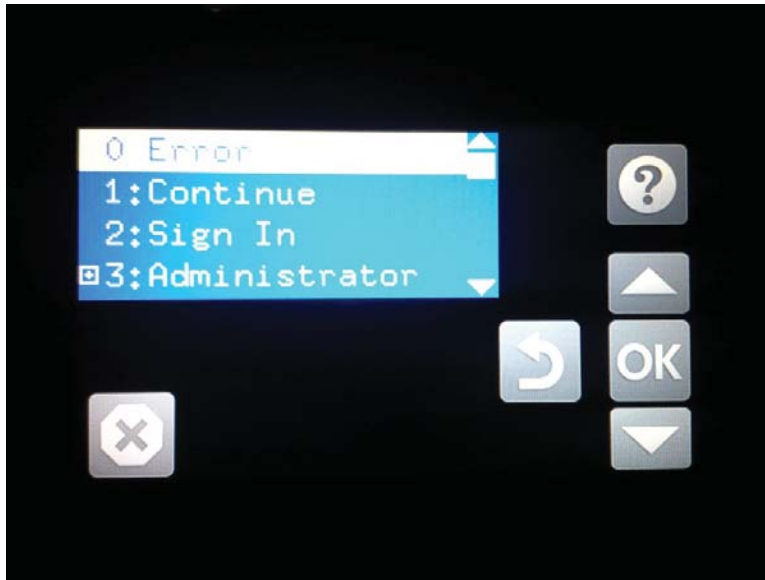

Use this button to see more information about a selected item.



Use this button to scroll up through menu items.



Use this button to select a highlighted menu item.



Use this button to scroll down through menu items.



Use this button to go back to the previous menu.




Not used.



Use this button to exit a diagnostic test.

- Use the **down arrow ▼** button to scroll to **+3 Administration**, and then press the **OK** button to select it.

Figure 2-27 Access the administration menu

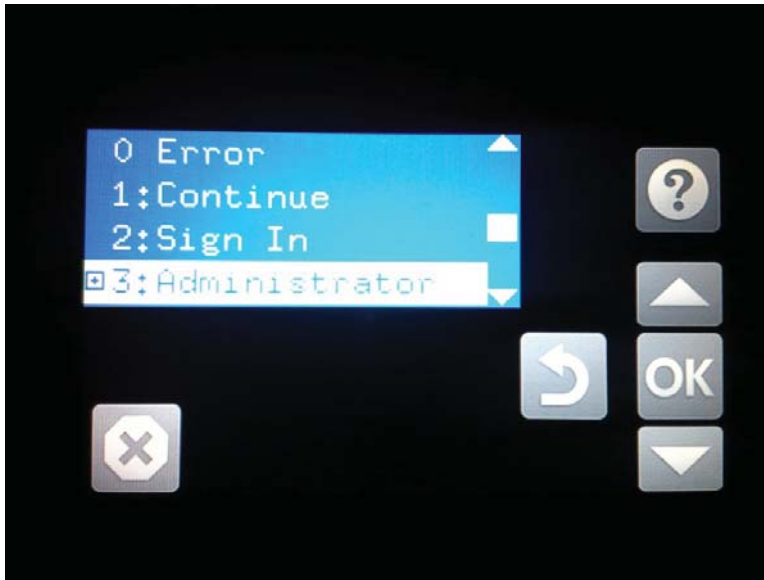

- Use the **down arrow ▼** button to scroll to **+E CP Diagnostics**, and then press the **OK** button to select it.

 **NOTE:** An administrator password might be required to continue.

Figure 2-28 Access the diagnostics menu



Screen test


1. Open the control panel system diagnostic tests. See [Open the control panel system diagnostic tests on page 132](#).
2. With 1 Screen Test highlighted, press the OK button to select it.

Figure 2-29 Open the screen test



3. The blue vertical gradient screen appears.

Figure 2-30 Blue vertical gradient screen

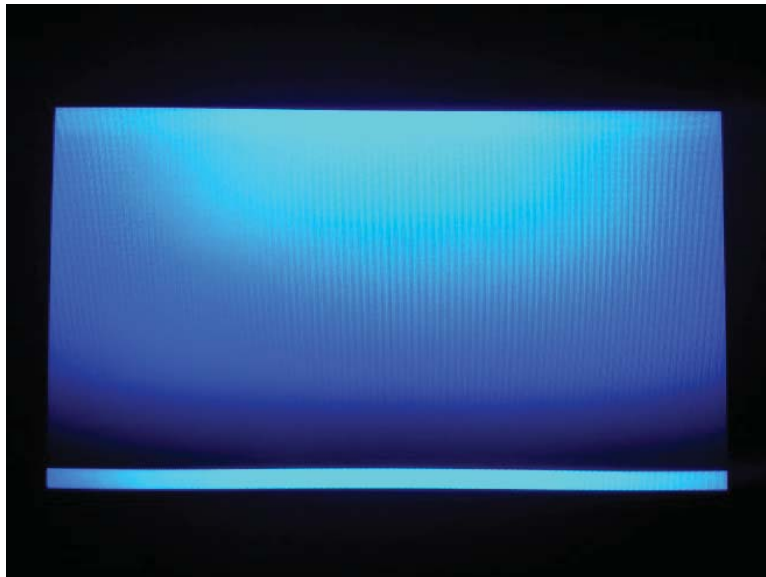


4. Select the touchscreen to scroll through the remaining touchscreen test screens.


 **NOTE:** Select the Home button to exit the test.




Green vertical gradient

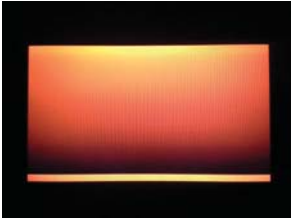


Red vertical gradient

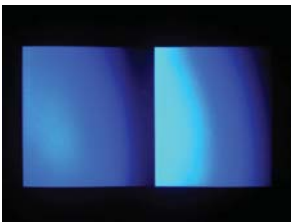

Blue horizontal gradient

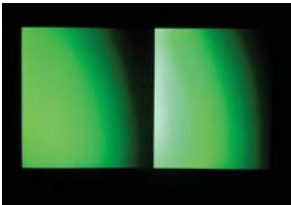

Green horizontal gradient

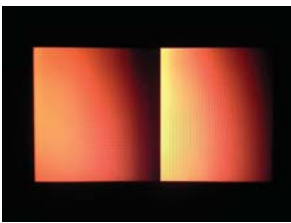

Red horizontal gradient




Blue with black horizontal interlaced




Green with black horizontal interlaced




Red with black horizontal interlaced

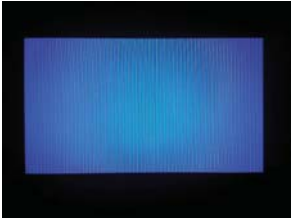

Blue with black vertical interlaced

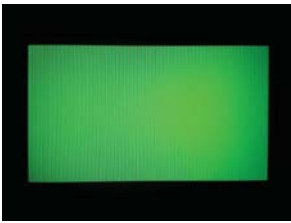

Green with black vertical interlaced

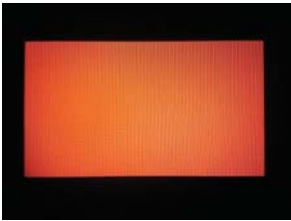

Red with black vertical interlaced




Black with white center




White with black center



Checkerboard

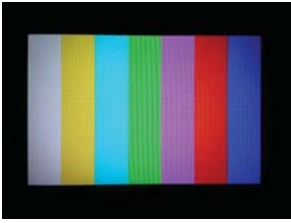

Multicolor stripes

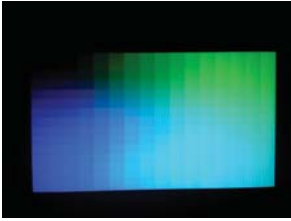


Blue green grid meshing

Touch test


1. Open the control panel system diagnostic tests. See [Open the control panel system diagnostic tests on page 132](#).
2. Use the [down arrow ▼](#) button to scroll to [2 Touch Test](#), and then press the [OK](#) button to select it.

Figure 2-31 Open the touch test

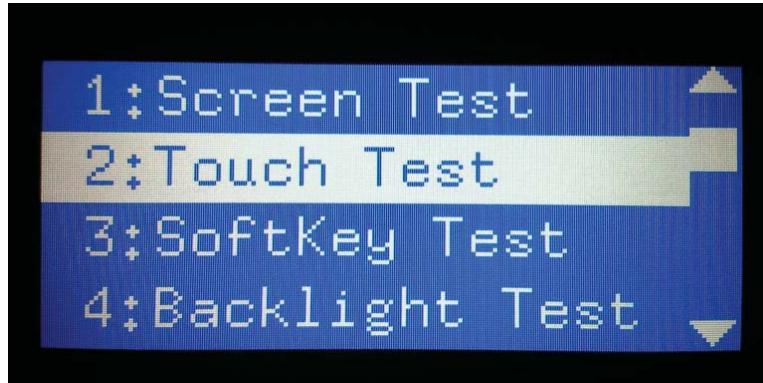

3. Use your finger to touch the white grid on the display.


Figure 2-32 Touch the white grid

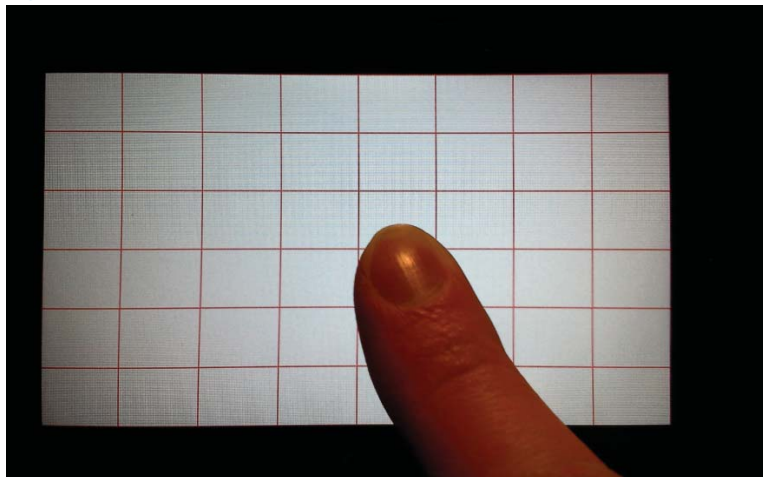

4. A mark appears on the grid where it was touched.

 **NOTE:** Select the Home button to exit the test.


Figure 2-33 Verify the mark

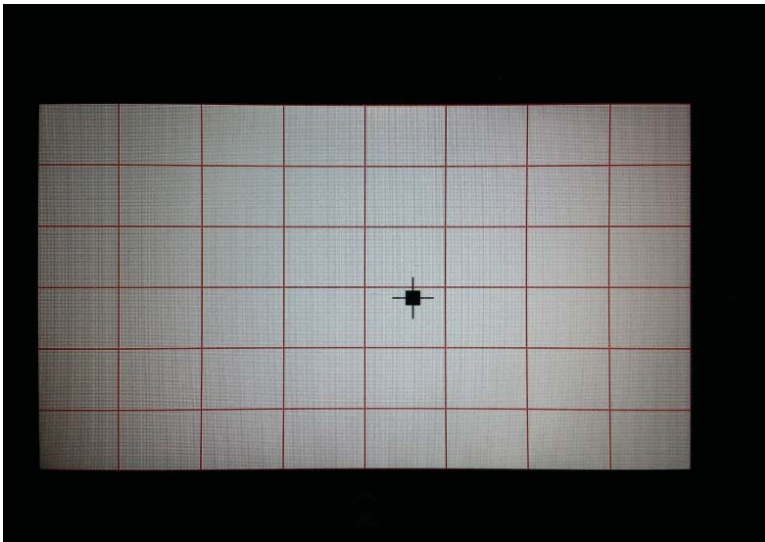

SoftKey test


1. Open the control panel system diagnostic tests. See [Open the control panel system diagnostic tests on page 132](#).
2. Select 3 SoftKey Test, and then select OK.

Figure 2-34 Open the softkey test

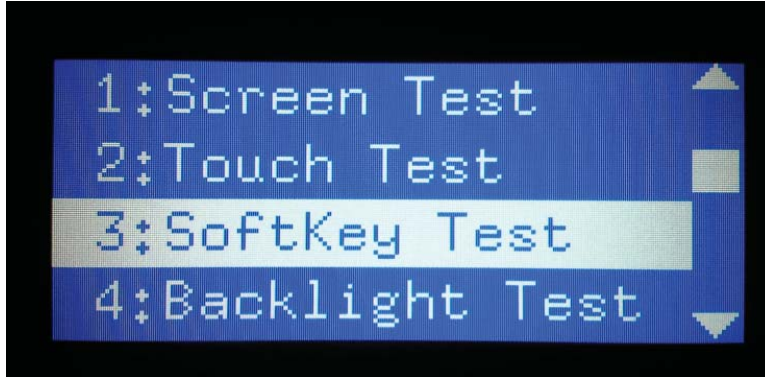

3. When prompted, select the Home button.

Figure 2-35 Touch the Home button

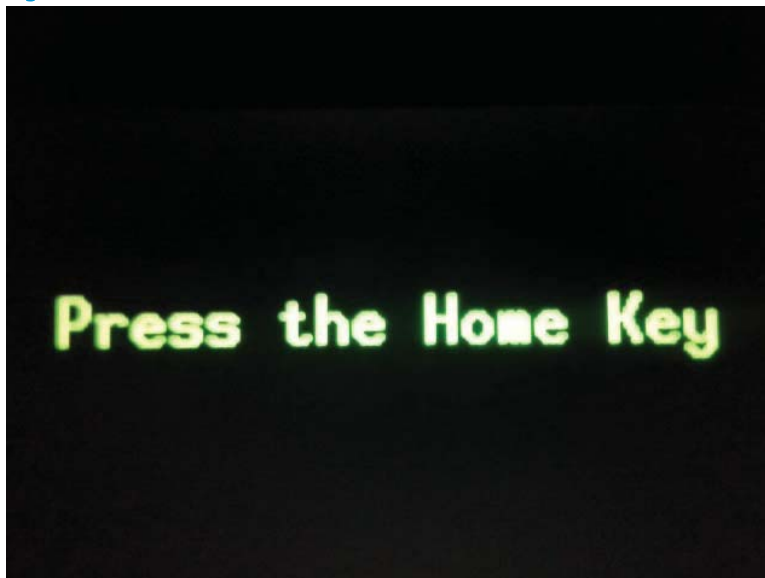

4. If the test is successful, the following screen appears on the display.


 **NOTE:** Touch the screen to exit the test.

Figure 2-36 Successful test



Backlight test

1. Open the control panel system diagnostic tests. See [Open the control panel system diagnostic tests on page 132](#).
2. Use the [down arrow ▼](#) button to scroll to [4 Backlight Test](#), and then select [OK](#).

After selecting the [4 Backlight Test](#), the screen automatically dims, and then returns to full brightness.


 **NOTE:** Touch any key to exit the test.

Figure 2-37 Open the backlight test



Sound test

1. Open the control panel system diagnostic tests. See [Open the control panel system diagnostic tests on page 132](#).
2. Select **5 Sound Test**, and then select **OK**.

After selecting the **5 Sound Test**, the printer emits a series of audible tones.



 **NOTE:** Touch any key to exit the test.

Figure 2-38 Open the sound test



Keyboard test (MFP Flow models only)


 **IMPORTANT:** The control panel system diagnostic tests include a [6 Keyboard Test](#) item. This test is **not** valid for the non-Flow MFP, even though this option is present in the control panel system diagnostic tests menu.

If the [6 Keyboard Test](#) is opened on a non-Flow MFP, the printer power must be turned off to exit the test.

HP does not recommend turning the printer power off during the control panel system diagnostic tests.

1. Open the control panel system diagnostic tests. See [Open the control panel system diagnostic tests on page 132](#).
2. Select [6 Keyboard Test](#), and then select **OK**.


Figure 2-39 Open the keyboard test

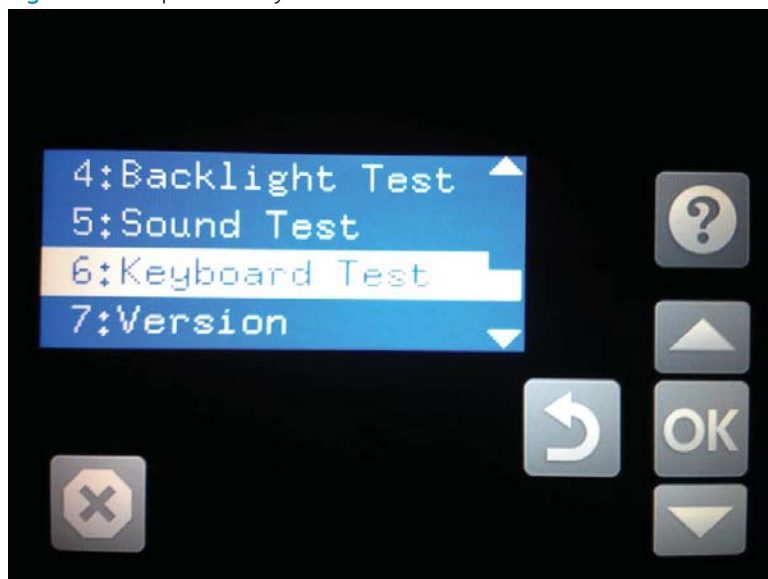

3. When prompted, select the H key on the keyboard or the Home button to exit the test.

Version

1. Open the control panel system diagnostic tests. See [Open the control panel system diagnostic tests on page 132](#).
2. Select **7 Version**, and then select **OK**.


 **NOTE:** Touch any key to exit the test.

Select **7 Version** to view the following types of information:

 **NOTE:** The following types of information are for the control panel only, not the printer.

- Panel ID
- Hardware (version)
- Firmware (version)
- KB Hw (version)
- KB Firm (version)
- LCD Vendor
- Touch Controller Version

Figure 2-40 Open the sound test

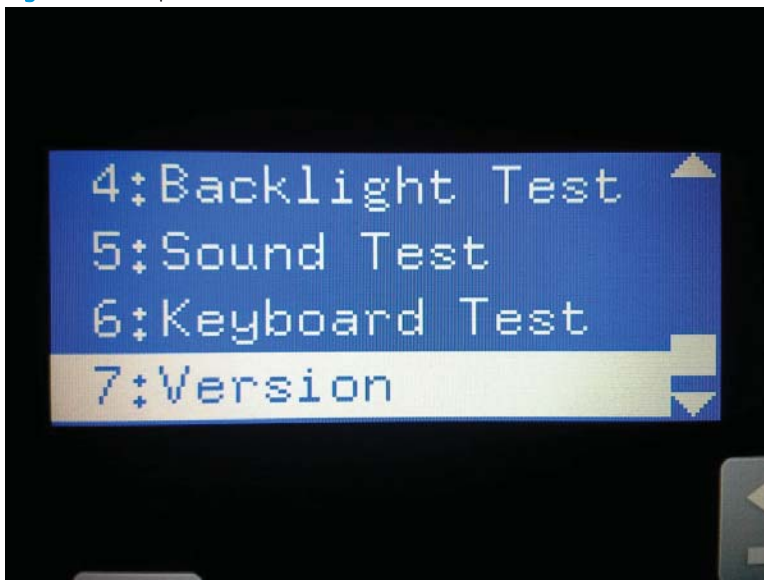

Control panel diagnostic flowcharts


Use the flowcharts in this section to troubleshoot the following control panel problems.

- Touchscreen is blank, white, or dim (no image).
- Touchscreen is slow to respond or requires multiple presses to respond.
- Touchscreen has an unresponsive zone.
- No control panel sound.
- [Home](#) button is unresponsive.
- Hardware integration pocket (HIP) is not functioning (control panel functional).

Touchscreen black, white, or dim (no image)

NOTE: To open the diagnostic function, press the button on the back of the control panel.


Figure 2-41 Touchscreen blank, white, or dim (no image)

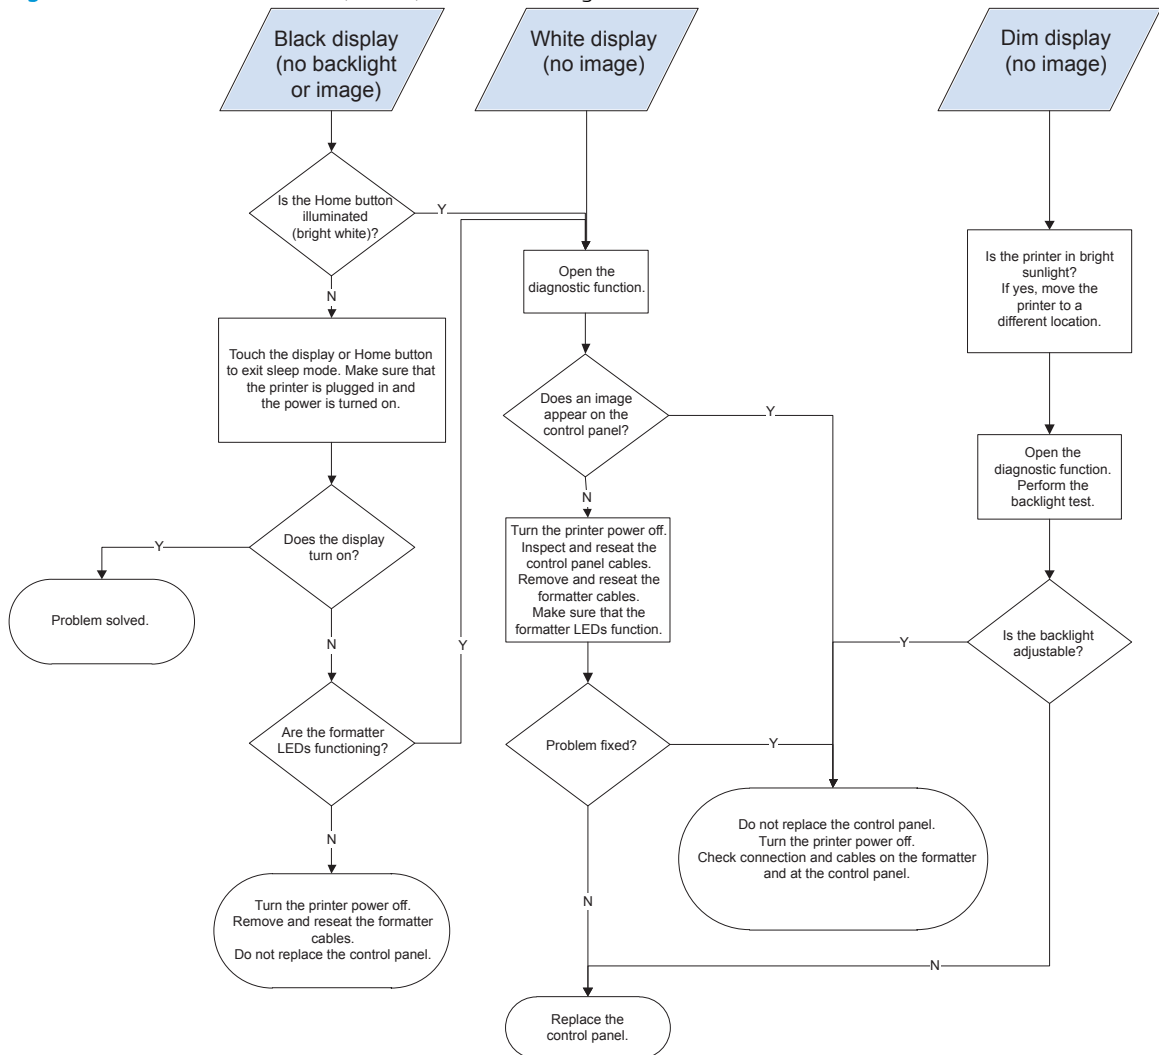

Touchscreen has an unresponsive zone

 **NOTE:** To open the diagnostic function, press the button on the back of the control panel.


Figure 2-42 Touchscreen has an unresponsive zone

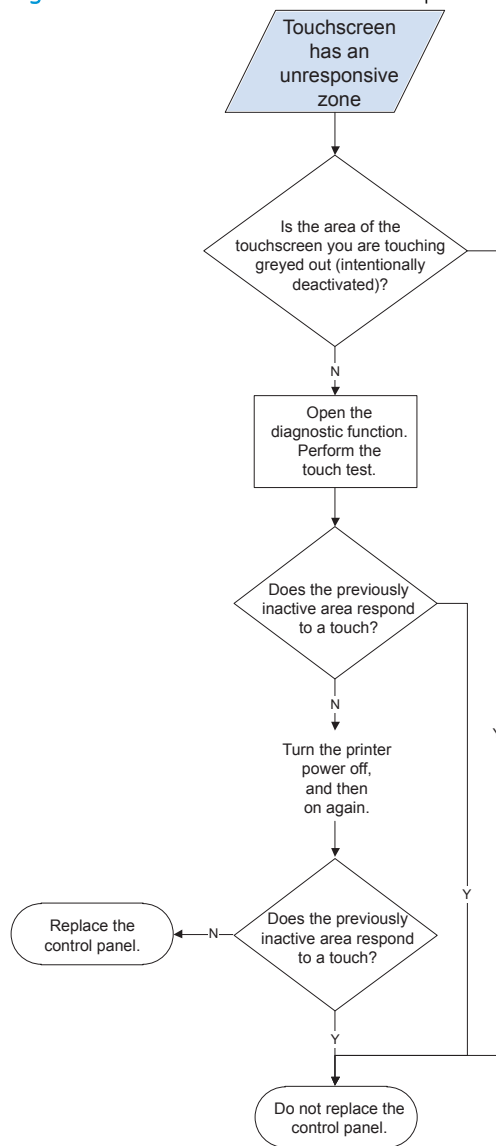

No control panel sound

 **NOTE:** To open the diagnostic function, press the button on the back of the control panel.


Figure 2-43 No control panel sound

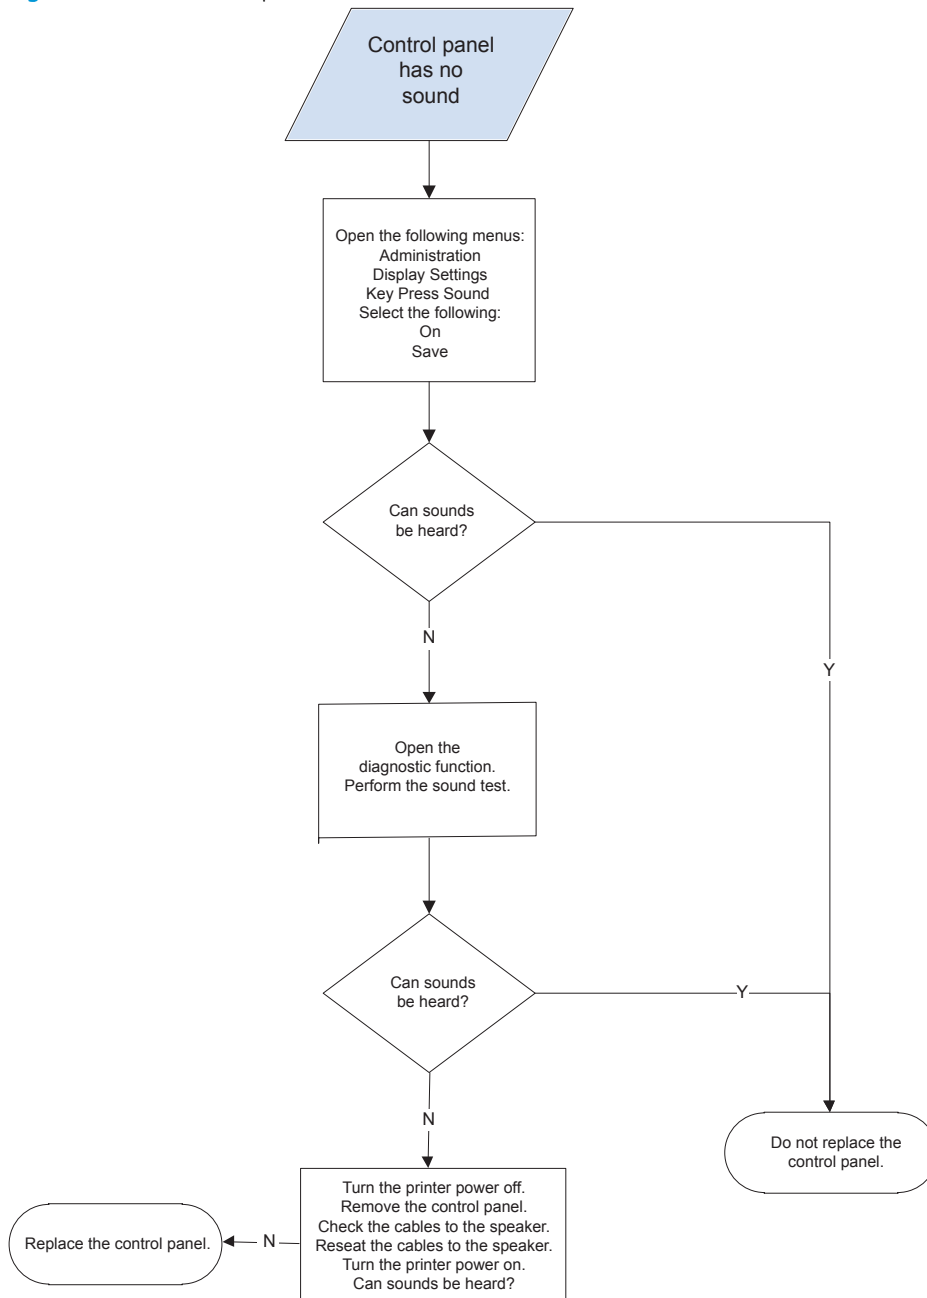

Home button is unresponsive


 **NOTE:** To open the diagnostic function, press the button on the back of the control panel.

Figure 2-44 Home button is unresponsive

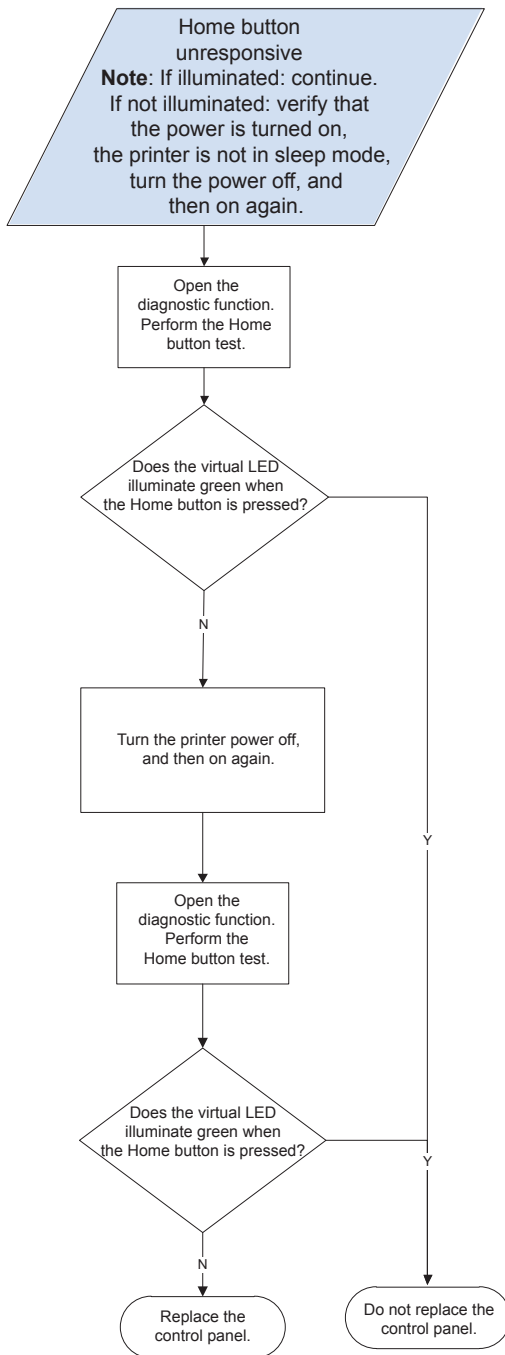

Hardware integration pocket (HIP) is not functioning (control panel functional)


Figure 2-45 Hardware integration pocket (HIP) is not functioning (control panel functional)

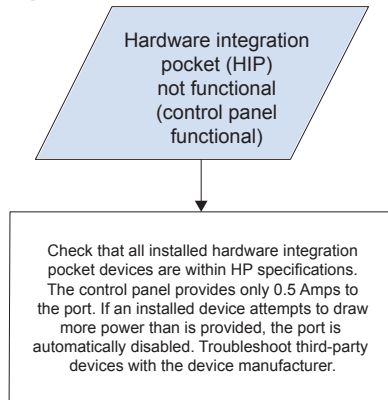

Scanning subsystem (MFP)

Calibrate the scanner

Use this procedure to properly position the copied image on the page.

 **TIP:** This adjustment might be required after the scanner or document feeder is replaced.

1. From the Home screen on the printer control panel, select [Support Tools](#).
2. Select [Calibrations](#).
3. Select [Calibrate Scanner](#), and then follow the instructions provided on the screen.

Tools for troubleshooting


Individual component diagnostics

Tools for troubleshooting: LED diagnostics

LED, engine, and individual diagnostics can identify and troubleshoot printer problems.

Understand lights on the formatter

Two LEDs on the formatter indicate that the printer is functioning correctly.

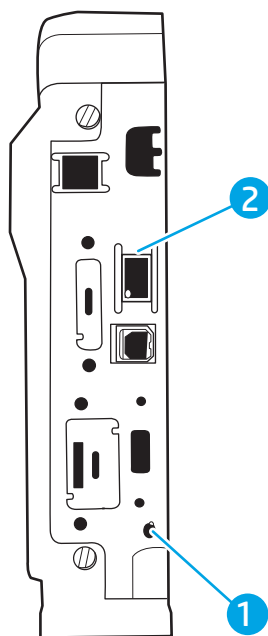

-
- | | |
|---|-------------------|
| 1 | Heartbeat LED |
| 2 | HP Jetdirect LEDs |
-

Heartbeat LED

The heartbeat LED indicates that the formatter is functioning correctly. While the product is initializing after it is turned on, the LED blinks rapidly, and then turns off. When the product has finished the initialization sequence, the heartbeat LED pulses on and off.

The following table describes the heartbeat LED operation while the product is executing the firmware boot process.

 **NOTE:** When the initialization process completes, the heartbeat LED should be illuminated solid green.

If after initialization, the heartbeat LED is not solid green, see [Table 2-10 Heartbeat LED, product operational on page 155](#).

Table 2-9 Heartbeat LED, product initialization

| Product initializing state | Heartbeat LED, normal state | Heartbeat LED, error state |
|---|--|--|
| No power (power cable disconnected or power switch off) | Off | Not applicable |
| Power on (immediately after the power switch pressed) | Red, solid <ul style="list-style-type: none"> Duration should be 1 second or less | Red, solid <ul style="list-style-type: none"> Firmware error; problem finding hardware and booting the serial peripheral interface flash memory <ul style="list-style-type: none"> Boot process halted Replace the formatter. |
| Serial peripheral interface (SPI) flash memory boot | Green, solid | Red, solid <ul style="list-style-type: none"> Firmware error; problem corrupt or missing SPI flash memory <ul style="list-style-type: none"> Boot process halted Replace the formatter. |
| HW checks on board DRAM | Green, solid | Red, solid <ul style="list-style-type: none"> Power on self check failure <ul style="list-style-type: none"> Boot process halted Replace the formatter. |
| Control panel connection initializes | Green, solid <p>NOTE: Control panel communication successful. If an error occurs, a message should appear on the control panel display.</p> | Yellow, fast flash <ul style="list-style-type: none"> Formatter to control panel connection failed <ul style="list-style-type: none"> Boot process continues Check the cables between the formatter and control panel for damage. Make sure that the cables are fully seated. |
| Pre-boot menu available (including diagnostics) | Green, solid | Red, solid <ul style="list-style-type: none"> Diagnostic failure <ul style="list-style-type: none"> Follow diagnostic instructions Turn the power off, and then on again to restart the initialization process. |
| Accessing disk for firmware image | Green, solid <p>NOTE: If applicable, disk error messages appear on the control panel display.</p> | Yellow, fast flash <ul style="list-style-type: none"> Control panel not connected |
| Firmware boot | Green, solid <p>NOTE: If applicable, error messages appear on the control panel display.</p> | Yellow, fast flash <ul style="list-style-type: none"> Control panel not connected |
| Product operational | Green, heartbeat blink <p>NOTE: If applicable, error messages appear on the control panel display.</p> | Yellow, fast flash <ul style="list-style-type: none"> Control panel not connected |

Table 2-9 Heartbeat LED, product initialization (continued)

| Product initializing state | Heartbeat LED, normal state | Heartbeat LED, error state |
|---|------------------------------------|---|
| 49.XX.YY error or initialization freezes | Not applicable | LED off NOTE: An error message (for example, 49.XX.YY) might appear on the control panel display. Eventually a formatter connection missing message will appear. Turn the power off, and then on again to restart the initialization process. If the error persists, perform a firmware upgrade. |
| Control panel connection interrupted after the product is operational | Not applicable | Yellow, fast flash • Control panel not connected |
| Flat flexible cable (FFC) between the formatter and DC controller is not connected or damaged | Not applicable | Yellow, solid • Formatter to DC controller connection failed Check the cable between the formatter and DC controller for damage. Make sure that the cable is fully seated. |
| Sleep Mode | Green, slow blink | Not applicable |
| Approaching Sleep Mode | Green, slow blink | Not applicable |
| Wake up from Sleep Mode | Follows initialization progression | Follows initialization progression |
| Approaching wake up from Sleep Mode | Follows initialization progression | Follows initialization progression |

The following table describes the heartbeat LED operation when the product completes the firmware boot process and is in the **Ready** state.

Table 2-10 Heartbeat LED, product operational

| LED color | Description |
|-----------|---|
| Green | <ul style="list-style-type: none"> • Normal operation <ul style="list-style-type: none"> – Formatter is operating normally – Firmware is operating normally – Control panel is connected |
| Yellow | <ul style="list-style-type: none"> • Formatter cannot connect to the control panel <ul style="list-style-type: none"> – Check control panel connections – Verify control panel functionality |
| Red | <ul style="list-style-type: none"> • Formatter error or failure |

Table 2-10 Heartbeat LED, product operational (continued)

| LED color | Description |
|-----------|---|
| | <ul style="list-style-type: none">– Serial peripheral interface (SPI) flash memory boot error– Power on self test (formatter) failed– Diagnostic (formatter) failed |
| Off | <p>TIP: The heartbeat LED is off if the power cable is disconnected, the product power switch is in the off position, or the product is in Sleep Mode.</p> <ul style="list-style-type: none">• Firmware or system freeze– Check control panel for an error message– Control panel failure <p>NOTE: This condition is not usually caused by a formatter failure. Turn the power off, and then on again. If the error persists, perform a firmware upgrade.</p> |

HP Jetdirect LEDs

The embedded HP Jetdirect print server has two LEDs. The yellow LED indicates network activity, and the green LED indicates the link status. A blinking yellow LED indicates network traffic. If the green LED is off, a link has failed.

For link failures, check all the network cable connections. In addition, try to manually configure the link settings on the embedded print server by using the printer control panel menus.

1. From the [Home](#) screen on the printer control panel, select [Settings](#).
2. Open the following menus:
 - [Networking](#)
 - [Ethernet](#)
 - [Link Speed](#)
3. Select the appropriate link speed.


Tools for troubleshooting: Engine diagnostics

The printer contains extensive internal engine diagnostics that help in troubleshooting print quality, paper path, noise, assembly, and timing issues.

Engine test button

To verify that the printer engine is functioning, print an engine test page. Use a small pointed object to depress the test-page switch located on the rear of the printer. The test page should have a series of lines that are parallel to the short end of the page. The test page can use only Tray 2 as the paper source, so make sure that paper is loaded in Tray 2.

Figure 2-46 Engine test button

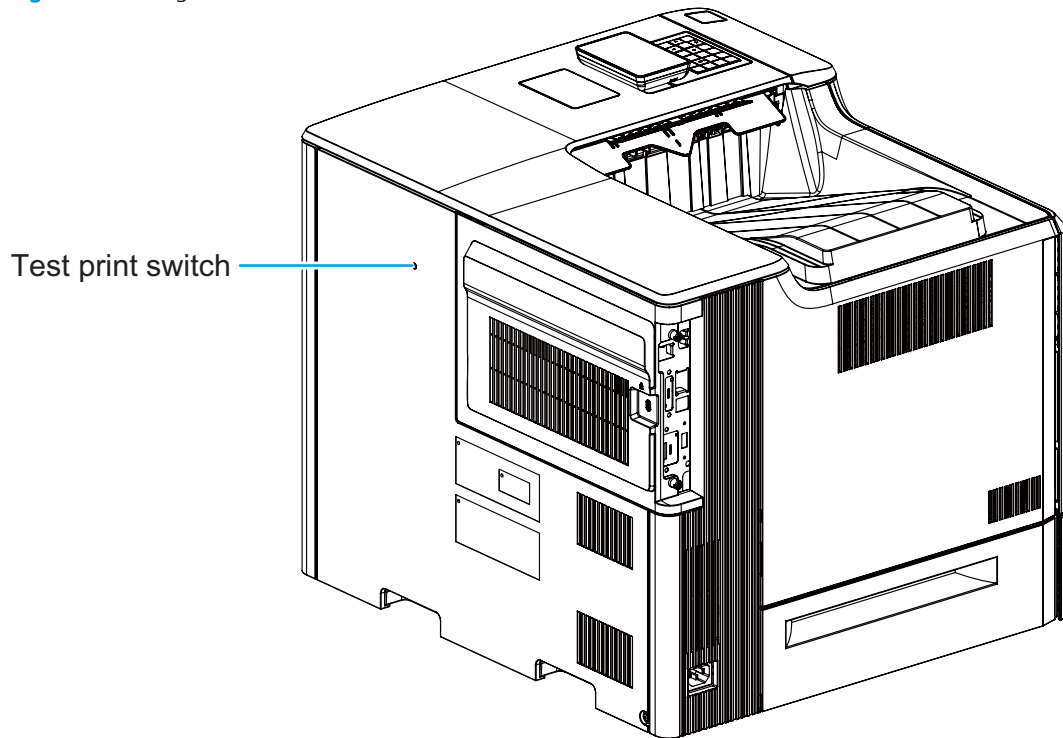

Defeating interlocks


Different tests can be used to isolate different types of issues. For assembly or noise isolation, run the diagnostic test when the front door or right door is open. To operate the printer with the doors open, the interlock switch levers must be depressed to simulate a closed-cover position.

⚠ WARNING! Be careful when performing printer diagnostics to avoid risk of injury. Only trained service personnel should open and run the diagnostics with the covers removed. Never touch any of the power supplies when the printer is turned on.

💡 TIP: Fold a stiff piece of paper, for example a business card or index card, into a 10 mm (.375 in) strip, and insert the strip into the slots for the front door and right door logic switches.


1. Open the front door, and then insert a folded piece of paper into one slot (callout 1).

Figure 2-47 Defeating interlocks (front door)

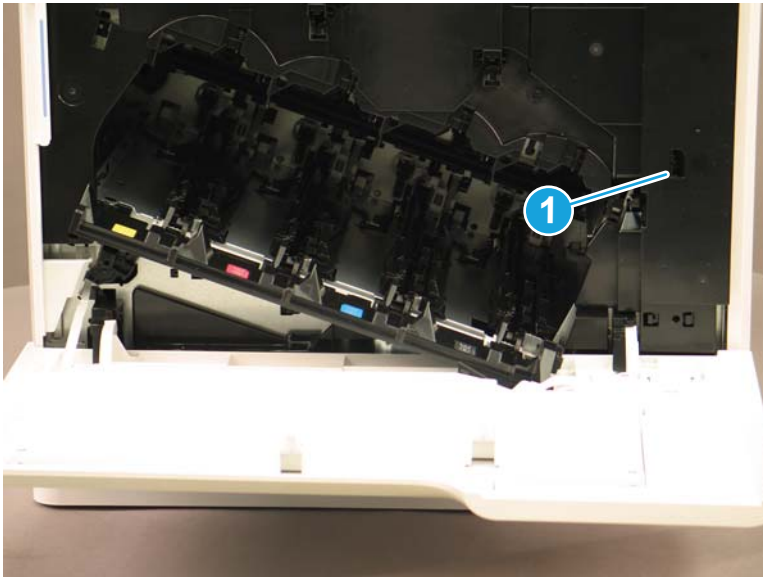

2. Open the right door, and then insert a folded piece of paper into two slots (callout 1).

Figure 2-48 Defeating interlocks (right door)

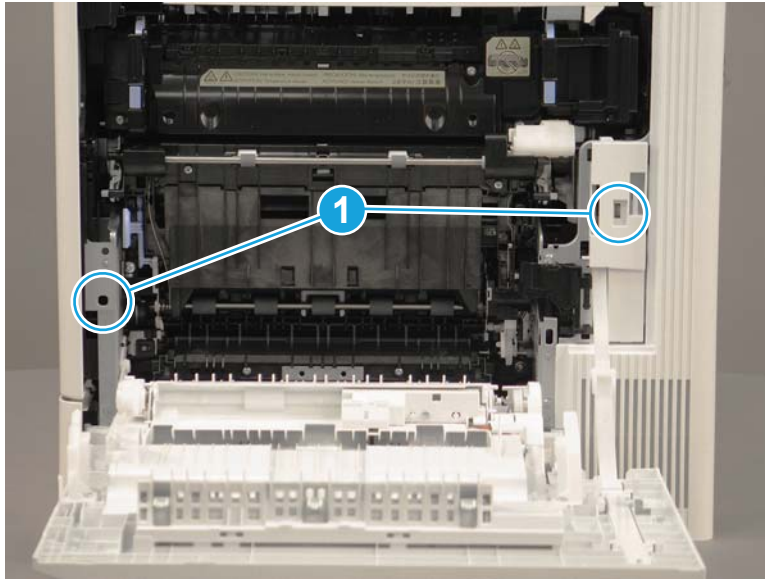

Disable cartridge check

Use this diagnostic test to print internal pages or send an external job to the printer when the toner cartridge is removed or exchanged. Supply errors are ignored while the printer is in this mode. When the printer is in this mode, access the troubleshooting menus and print internal pages (the print quality pages will be the most useful). This test can be used to isolate problems, such as noise, and to isolate print-quality problems that are related to the toner cartridge.



NOTE: Do not remove or exchange the toner cartridge until after beginning the disable cartridge check diagnostic.

Disable cartridge check from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, select [Support Tools](#).
2. Open the following menus:
 - [Troubleshooting](#)
 - [Diagnostic Tests](#)
 - [Disable Cartridge Check](#)

Disable cartridge check from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the arrow keys to navigate to [Support Tools](#), and then press the [OK](#) button.
2. Use the down arrow ▼ button to scroll to [Troubleshooting](#), and then press the [OK](#) button.
3. Use the down arrow ▼ button to scroll to [Diagnostics](#), and then press the [OK](#) button.
4. Use the down arrow ▼ button to scroll to [Disable Cartridge Check](#), and then press the [OK](#) button to select it.

Tools for troubleshooting: Paper path and sensor diagnostic tests

Use these diagnostic tests to manually test the printer sensors, switches.



NOTE: The menu list of sensors and switches for the [Paper path sensors test](#), [Manual Sensor Test](#), and the [Tray/Bin Manual Sensor Test](#) varies depending on which optional accessories are installed.

The tables in this section describe the sensor tests available with an optional 1x550-sheet paper feeder installed.

For trays other than Tray 1 or Tray 2, the tray number associated with a sensor or switch depends on the number and type of accessories installed.

Paper path test

This diagnostic test generates one or more test pages. Use these pages to isolate the cause of jams.

To isolate a problem, specify which input tray to use, specify whether to use the duplex path, and specify the number of copies to print. Multiple copies can be printed to help isolate intermittent problems. The following options become available after beginning the diagnostic feature:

- **Print Test Page:** Run the paper-path test from the default settings: Tray 2, no duplex, and one copy. To specify other settings, scroll down the menu, and select the setting, and then scroll back up and select [Print Test Page](#) to start the test.
- **Source Tray:** Select Tray 1, Tray 2, or the optional tray.
- **Test Duplex Path:** Enable or disable two-sided printing.
- **Number of Copies:** Set the numbers of copies to be printed; the choices are 1, 10, 50, 100, or 500.

Access the paper path test from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, scroll to and touch the [Support Tools](#) button.
2. Open the following menus:
 - [Troubleshooting](#)
 - [Diagnostic Tests](#)
 - [Paper Path Test](#)
3. Select the paper-path test options for the test.

Access the paper path test from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the down arrow ▼ button to scroll to [Support Tools](#), and then press the [OK](#) button.
2. Use the down arrow ▼ button to scroll to [Troubleshooting](#), and then press the [OK](#) button.
3. Use the down arrow ▼ button to scroll to [Diagnostic Tests](#), and then press the [OK](#) button.
4. Use the down arrow ▼ button to scroll to [Paper Path Test](#), and then press the [OK](#) button.

Paper path sensors test

This test displays the status of each paper-path sensor and allows viewing of sensor status while printing internal pages.

Access the paper path sensors test from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, scroll to and touch the [Support Tools](#) button.
2. Open the following menus:
 - [Troubleshooting](#)
 - [Diagnostic Tests](#)
 - [Paper Path Sensors](#)

Access the paper path sensors test from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the down arrow ▼ button to scroll to [Support Tools](#), and then press the [OK](#) button.
2. Use the down arrow ▼ button to scroll to [Troubleshooting](#), and then press the [OK](#) button.
3. Use the down arrow ▼ button to scroll to [Diagnostic Tests](#), and then press the [OK](#) button.
4. Use the down arrow ▼ button to scroll to [Paper Path Sensors](#), and then press the [OK](#) button.



NOTE: Exiting the [Paper Path Sensors](#) menu and then reentering the test will clear the test values from the previous test.

The menu list of sensors and motors for the Paper path sensors test varies depending on which optional accessories are installed.

The following table describes the sensor tests available with an optional 1x550-sheet paper feeder installed.

For trays other than Tray 1 or Tray 2, the tray number associated with a sensor or switch depends on the number and type of accessories installed.

Table 2-11 Paper-path sensors diagnostic tests

| Sensor name | Sensor/Switch number | Replacement part number | Descriptions |
|---------------------------------|----------------------|--|-----------------------|
| Tray 3 feed sensor ¹ | SR21 | RM2-5145-000CN | Paper feed assembly |
| Registration sensor | SR6 | RM2-1957-000CN | Registration assembly |
| Fuser loop 1 sensor | PS1 | RM2-1928-000CN (110 V) RM2-1929-000CN (220 V) | Fuser |
| Front media width sensor | SR13 | RM2-1957-000CN | Registration assembly |
| Rear media width sensor | SR14 | RM2-1957-000CN | Registration assembly |
| Fuser pressure release sensor | SR11 | RM2-1928-000CN (110 V) RM2-1929-000CN (220 V) | Fuser |

Table 2-11 Paper-path sensors diagnostic tests (continued)

| Sensor name | Sensor/Switch number | Replacement part number | Descriptions |
|-----------------------------|----------------------|--|-------------------------|
| Fuser output sensor | SR9 | RM2-1928-000CN (110 V) RM2-1929-000CN (220 V) | Fuser |
| Developer alienation sensor | SR4 | RM2-1927-000CN | Main drive assembly |
| Output bin full sensor | SR10 | RM2-6621-000CN | Paper delivery assembly |

¹ Only appears if optional accessories are installed.

Manual sensor tests

The table in this section lists the sensors and switches available in the [Manual Sensor Test](#).

Access the manual sensor test from a touchscreen control panel

The [Manual Sensor Test](#) screen shows the sensor number, sensor name (M553x only), sensor state (active or inactive), and the number of times the sensor has been toggled (activated).

1. From the [Home](#) screen on the printer control panel, scroll to and touch the [Support Tools](#) button.
2. Open the following menus:
 - [Troubleshooting](#)
 - [Diagnostic Tests](#)
 - [Manual Sensor Test](#)
3. Activate the desired sensor, and then check the control panel display to verify the sensor state (active or inactive).
 - The [State](#) virtual LED next to the sensor number and sensor name illuminates green when the sensor is active.
 - The [Toggle](#) virtual LED next to the sensor number and sensor name illuminates green after the sensor is activated and increments by one each time the sensor is interrupted (activated or deactivated).

For example, opening the front door increments the [SW1 Front door opening/closing Toggle](#) item count two times—once when the door is opened, and once when the door is closed.

4. Touch the [Reset Sensors](#) button to reset the [Toggle](#) count item.


-or-

Touch the [Cancel](#) button or the [Return](#) arrow button to exit the [Manual Sensor Test](#) screen and return to the [Diagnostic Tests](#) menu.

Access the manual sensor test from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the down arrow ▼ button to scroll to [Support Tools](#), and then press the [OK](#) button.
2. Use the down arrow ▼ button to scroll to [Troubleshooting](#), and then press the [OK](#) button.
3. Use the down arrow ▼ button to scroll to [Diagnostic Tests](#), and then press the [OK](#) button.
4. Use the down arrow ▼ button to scroll to [Manual Sensor Test](#), and then press the [OK](#) button.
5. Activate the desired sensor, and then check the control panel display to verify the sensor state (active or inactive).



TIP: Press the return arrow ↵ button to reset the sensor or press the [Cancel](#)  button to exit the test.

- The **State** virtual LED next to the sensor number and sensor name illuminates green when the sensor is active.
- The **Toggle** virtual LED next to the sensor number and sensor name illuminates green after the sensor is activated and increments by one each time the sensor is interrupted (activated or deactivated).

For example, opening the cartridge door increments the **SW4 Front door opening/closing Toggle** item count two times—once when the door is opened, and once when the door is closed.



NOTE: The following table describes the sensor tests available with an optional 1x550-sheet paper feeder installed.

For trays other than Tray 1 or Tray 2, the tray number associated with a sensor or switch depends on the number and type of accessories installed.

For a diagram of sensor locations, see [Sensors and switches on page 173](#).

Table 2-12 Manual sensor diagnostic tests

| Sensor or switch | Replacement Part number | Description |
|---------------------------------------|--|-------------------------|
| PS1 Fuser loop 1 sensor | B5L35-67902 (110 V) | Fuser |
| | B5L36-67902 (220 V) | |
| SR6 Registration sensor | RM2-0093-000CN (M553n) | Registration assembly |
| | RM2-0018-000CN (M552dn, M553dn, M553x, M577) | |
| SR9 Fuser output sensor | B5L35-67902 (110 V) | Fuser |
| | B5L36-67902 (220 V) | |
| SR10 Output bin full sensor | RM2-0092-000CN (M553n) | Paper delivery assembly |
| | RM2-0016-000CN (M552dn, M553dn, M553x, M577) | |
| SR11 Fuser pressure release sensor | B5L35-67902 (110 V) | Fuser |
| | B5L36-67902 (220 V) | |
| SR13 Front Media width sensor | RM2-0017-000CN | Paper pickup assembly |
| SR13N Front Media width sensor | | |
| SR14 Rear media width sensor | RM2-0017-000CN | Paper pickup assembly |
| SR14N Rear media width sensor | | |
| SR21 Tray 3 feed sensor ¹ | RM2-5145-000CN | Paper feed assembly |
| SW3 Right door opening/closing sensor | WC2-5806-000CN | Switch button assembly |
| SW4 Front door opening/closing sensor | RM2_7133-000CN | Switch PCA assembly |

¹ Only appears if optional accessories are installed.

Tray/bin manual sensor test

The table in this section lists the sensors and switches available in the [Tray/Bin Manual Sensor Test](#).

Access the tray/bin manual sensor test from a touchscreen control panel

The [Tray/Bin Manual Sensor Test](#) screen shows the sensor number, sensor name, sensor state (active or inactive), and the number of times the sensor has been toggled (activated).

1. From the [Home](#) screen on the printer control panel, scroll to and touch the [Support Tools](#) button.
2. Open the following menus:
 - [Troubleshooting](#)
 - [Diagnostic Tests](#)
 - [Tray/Bin Manual Sensor Test](#)
3. Activate the desired sensor, and then check the control panel display to verify the sensor state (active or inactive).
 - The [State](#) virtual LED next to the sensor number and sensor name illuminates green when the sensor is active.
 - The [Toggle](#) virtual LED next to the sensor number and sensor name illuminates green after the sensor is activated and increments by one each time the sensor is interrupted (activated or deactivated).

For example, opening the front door increments the [SW4 Front door opening/closing sensor Toggle](#) item count two times—once when the door is opened, and once when the door is closed.

4. Touch the [Reset Sensors](#) button to reset the [Toggle](#) count item.


-or-

Touch the [Cancel](#) or the [Return](#) arrow button to exit the [Tray/Bin Manual Sensor Test](#) screen and return to the [Diagnostic Tests](#) menu.

Access the tray/bin manual sensor test from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the down arrow ▼ button to scroll to [Support Tools](#), and then press the [OK](#) button.
2. Use the down arrow ▼ button to scroll to [Troubleshooting](#), and then press the [OK](#) button.
3. Use the down arrow ▼ button to scroll to [Diagnostic Tests](#), and then press the [OK](#) button.
4. Use the down arrow ▼ button to scroll to [Tray/Bin manual Sensor Test](#), and then press the [OK](#) button.
5. Activate the desired sensor, and then check the control panel display to verify the sensor state (active or inactive).



TIP: Press the return arrow ↵ button to reset the sensor or press the [Cancel](#)  button to exit the test.

- The [State](#) virtual LED next to the sensor number and sensor name (M605x and M606x only) illuminates green when the sensor is active.
- The [Toggle](#) virtual LED next to the sensor number and sensor name (M605x and M606x only) illuminates green after the sensor is activated and increments by one each time the sensor is interrupted (activated or deactivated).

For example, opening Tray 2 increments the [SW5 Tray 2 detection switch Toggle](#) item count two times—once when the tray is opened, and once when the tray is closed.



NOTE: The following table describes the sensor tests available with an optional 1x550-sheet paper feeder installed.

For trays other than Tray 1 or Tray 2, the tray number associated with a sensor or switch depends on the number and type of accessories installed.

Table 2-13 Tray/bin manual sensors

| Sensor or switch name | Replacement part number | Descriptions |
|---|-------------------------------------|---|
| SR5 Tray 2 paper sensor | RM2-1946-000CN (part not available) | Size detect switch |
| SR8 Tray 1 paper sensor | RM2-6807-000CN | Right door assembly |
| SR10 Output bin media out sensor | RM2-6621-000CN | Paper delivery assembly |
| SR12 Cassette media out sensor | RM2-6556-000CN | Paper pickup assembly |
| SR20 Tray 3-X media out sensor ¹ | RM2-6556-000CN | Paper pickup assembly NOTE: Also associated with the media presence sensor. |
| SR21 Tray 3 feed sensor ¹ | RM2-5145-000CN | Paper feeder assembly |
| SW20 Right door sensor ¹ | RM2-6807-000CN | Right door assembly |
| SW21 Tray 3 cassette sensor ¹ | WC2-5803-000CN | Switch button assembly |

¹ Only appears if optional accessories are installed.

Tools for troubleshooting: Print/stop test

Use this diagnostic test to isolate the cause of problems such as image-formation defects and jams within the engine. During this test, stop the paper anywhere along the printer paper path. The test can be programmed to stop printing internal pages or an external print job when the paper reaches a certain position. The test can also be programmed to stop from 0 to 60,000 ms. If the timer is set to a value that is greater than the job-print time, the printer can recover in one of two ways:

- After the print job is completed press [OK](#) button to return to the [Troubleshooting](#) menu before the timer times out.
- After the timer times out, touch the [Stop](#) button. Activate the door switch to restart the engine and return it to a normal state.



NOTE: Do not try to perform a print/stop test while the printer is calibrating, because restarting the printer might be necessary. If a jam message displays on the control panel during testing, activate the door switch.

Access the print/stop test from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, scroll to and touch the [Support Tools](#) button.
2. Open the following menus:
 - [Troubleshooting](#)
 - [Diagnostic Tests](#)
 - [Print/Stop Test](#)
3. Enter a range, and then touch the [OK](#) button.

Access the print/stop test from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the down arrow ▼ button to scroll to [Support Tools](#), and then press the [OK](#) button.
2. Use the down arrow ▼ button to scroll to [Troubleshooting](#), and then press the [OK](#) button.
3. Use the down arrow ▼ button to scroll to [Diagnostic Test](#), and then press the [OK](#) button.
4. Use the down arrow ▼ button to scroll to [Print/Stop Test](#), and then press the [OK](#) button.

Tools for troubleshooting: Component tests

Use the procedure below to test various printer mechanical and electromechanical assemblies.


 **NOTE:** The menu list of components for the [Component Test](#) varies depending on which optional accessories are installed.

The table in this section describes the components available with an optional 1x550-sheet paper feeder installed.

For trays other than Tray 1 or Tray 2, the tray number associated with a sensor or switch depends on the number and type of accessories installed.

Individual component diagnostics (special-mode test)

This test activates individual parts independently to isolate problems.


 **NOTE:** The front door or right side door interlocks must be defeated to run the component tests. Some tests might require that the ITB and toner cartridges be removed. A control panel display prompt appears indicate removing some, or all of the cartridges, during certain tests.

Access the individual component diagnostics from a touchscreen control panel

1. From the [Home](#) screen on the printer control panel, scroll to and touch the [Support Tools](#) button.
2. Open the following menus:
 - [Troubleshooting](#)
 - [Diagnostic Tests](#)
 - [Component Test](#)
3. Select the component test options for the test.

Access the individual component diagnostics from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the down arrow ▼ button to scroll to [Support Tools](#), and then press the [OK](#) button.
2. Use the down arrow ▼ button to scroll to [Troubleshooting](#), and then press the [OK](#) button.
3. Use the down arrow ▼ button to scroll to [Diagnostic Test](#), and then press the [OK](#) button.
4. Use the down arrow ▼ button to scroll to [Component Test](#), and then press the [OK](#) button.

 **NOTE:** The table in this section describes the components available with an optional 1x550-sheet paper feeder installed.

For trays other than Tray 1 or Tray 2, the tray number associated with a sensor or switch depends on the number and type of accessories installed.

Table 2-14 Component test details

| Component test | Item tested | Replacement part number | Comments |
|----------------------------------|----------------|--|---|
| Feed roller clutch | CL1 | RM2-2091-000CN Lifter drive assembly | Activates the specified clutch. |
| Drum motors | M1 M2 M3 | RM2-1956-000CN | Activates the specified motor. |
| Fuser drive assembly | M4 | RM2-1934-000CN | Activates the specified motor. |
| Tray 2 pickup motor | M5 | RM2-1222-000CN Pickup drive assembly | Activates the specified motor. |
| Fuser pressure release motor | M6 | | Activates the specified motor. |
| Laser Scanner motor | M7 | RM2-1237-000CN Laser/scanner assembly | Activates the specified motor. |
| Duplexer pickup motor | M8 | | Activates the specified motor. |
| Tray 3 pickup motor ¹ | M20 | RM2-5145-000CN Paper feed assembly | Activates the specified motor. |
| Tray 2 pickup solenoid | SL1 | RM2-0090-000CN (M553n) RM2-0022-000CN (M552dn, M553dn, M553x, M577) Tray 1 roller alienation (part of secondary transfer assembly) | Activates the specified solenoid. |
| Tray 1 pickup solenoid | SL2 | RM2-1235-000CN Paper pickup assembly | Activates the specified solenoid. |
| Duplex switchback solenoid | SL3 | | Activates the specified solenoid. |
| Tray 3-X pickup solenoid | Not applicable | RM2-5154-000CN Paper pickup assembly | Activates the specified solenoid. |
| Repeat | Not applicable | Not applicable | Choose Off to execute the test once. Choose On to execute the test continuously. |

¹ Only appears if optional accessories are installed.

Scanner tests (MFP only)

Use these diagnostic tests to manually test the document feeder and scanner sensors.

Scanner tests

This section lists the sensors available in the [Scanner Tests](#).

Use the scanner tests

The [Scanner Tests](#) screen shows the sensor name, sensor state (active or inactive), and the number of times the sensor has been toggled (activated).

1. From the [Home](#) screen on the printer control panel, scroll to and touch the [Support Tools](#) button.
2. Open the following menus:
 - [Troubleshooting](#)
 - [Diagnostic Tests](#)
 - [Scanner Tests](#)
 - [Sensors](#)
3. Touch the sensor name on the [Scanner Tests](#) screen to display a sensor location graphic on the control panel display.
4. Activate the desired sensor, and then check the control panel display to verify the sensor state (active or inactive).
 - The [State](#) virtual LED next to the sensor number and sensor name illuminates green when the sensor is active.
 - The [Toggle](#) virtual LED next to the sensor number and sensor name illuminates green after the sensor is activated and increments by one each time the sensor is interrupted (activated or deactivated).

For example, opening and closing the flatbed cover increments the [Flatbed Cover Toggle](#) item count two times—once when the door is opened, and once when the door is closed.
5. Touch the [Reset Sensors](#) button to reset the [Toggle](#) count item.

-or-

Touch the [Cancel](#) button to exit the [Scanner Tests](#) screen, and then touch the [Cancel](#) button again to return to the [Diagnostic Tests](#) menu.

Scanner sensor tests

- [ADF paper present](#)
- [ADF Y \(length\)](#)
- [ADF jam cover](#)
- [ADF paper path deskew](#)
- [ADF paper path pick success](#)

- Paper path sensor 1 (unreachable)
- Flatbed Y (length)
- Flatbed cover

Diagrams

Use the diagrams in this section to identify printer components.

Diagrams: Block diagrams

Use the diagrams in this section to identify printer sensors, switches, and assemblies.

Sensors and switches

Figure 2-49 Printer base, sensors and switches block diagram

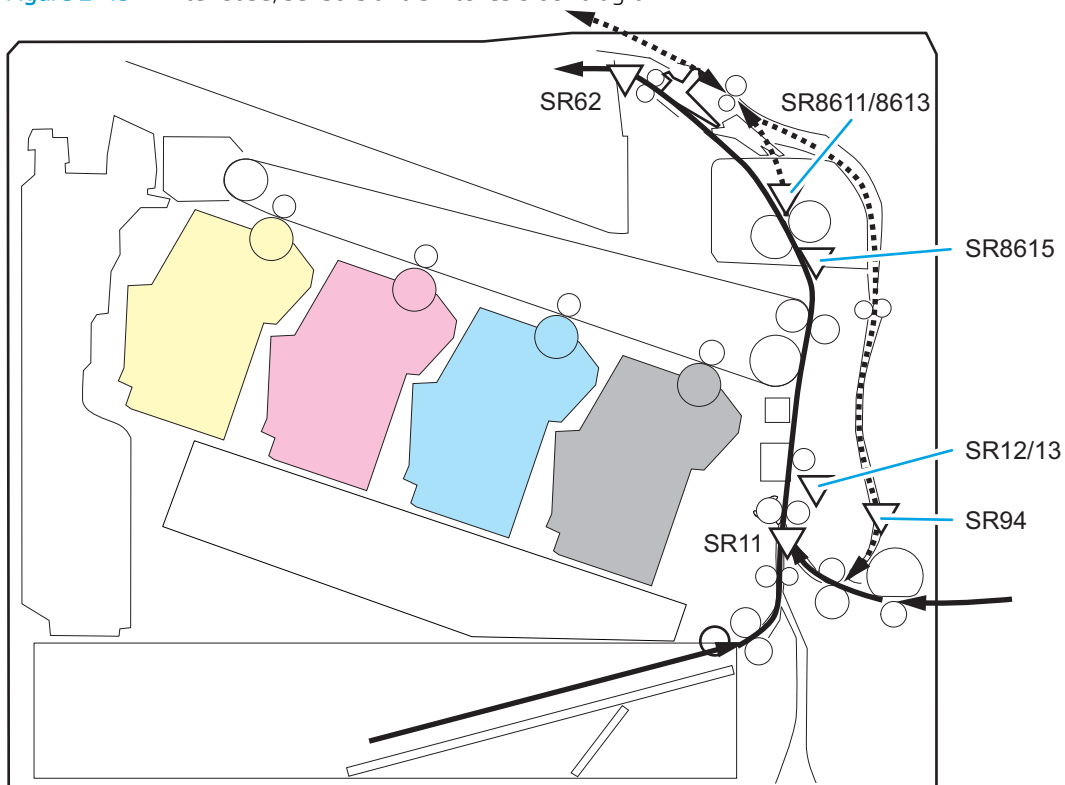


Table 2-15 Product base, sensors and switches block diagram

| Sensor | Description | Sensor | Description |
|--------|-----------------------------------|--------|---|
| SR11 | Registration sensor | SR94 | Duplex feed sensor (duplex models only) |
| SR12 | Registration media width sensor 1 | SR8611 | Fuser output sensor 1 |
| SR13 | Registration media width sensor 2 | SR8613 | Fuser output sensor 1 |
| SR62 | FD1 media full sensor | SR8615 | Fuser loop sensor |

Figure 2-50 1x550-sheet paper feeder, sensors and switches block diagram

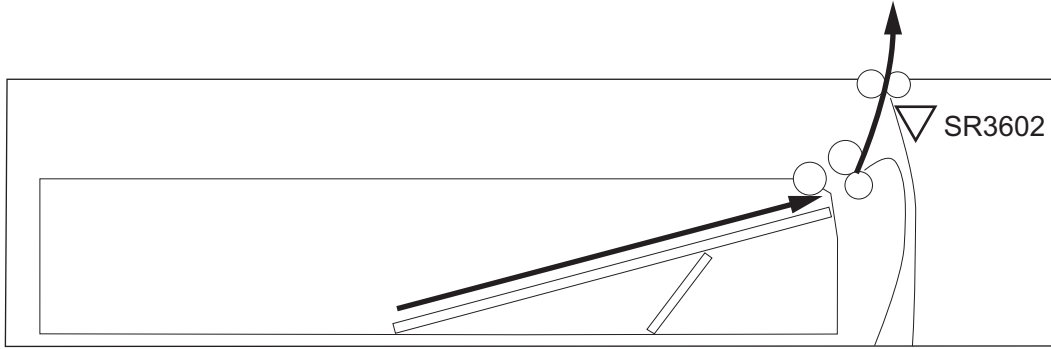


Table 2-16 1x500-sheet paper feeder, sensors and switches block diagram

| Sensor | Description |
|--------|---|
| PS3602 | Paper feeder sensor (550-sheet feeder only) |

Figure 2-51 Paper deck, sensors and switches block diagram

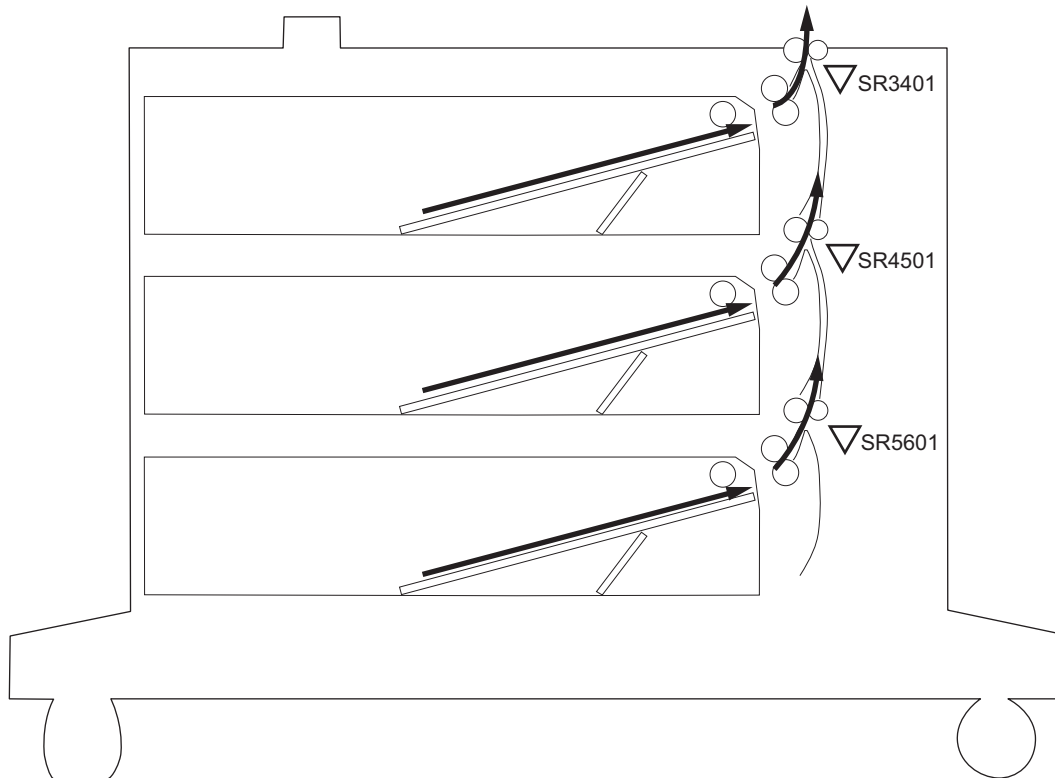


Table 2-17 Paper deck, sensors and switches block diagram

| Sensor | Description |
|--------|--|
| PS3401 | Paper deck cassette 1 feed sensor (1x550-sheet paper deck, 3x550-sheet paper deck, and HCI only) |
| PS4501 | Paper deck cassette 2 feed sensor (3x550-sheet paper deck and HCI only) |
| PS5601 | Paper deck cassette 3 feed sensor (3x550-sheet paper deck only) |

Figure 2-52 HCl, sensors and switches block diagram

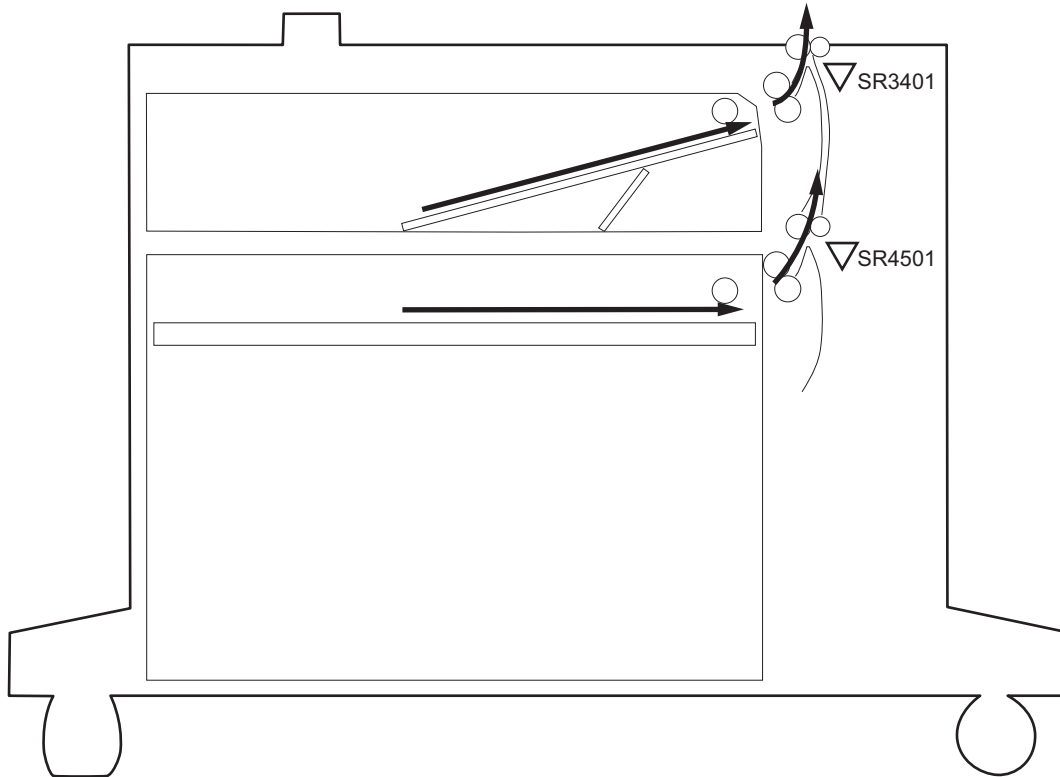


Table 2-18 HCl, sensors and switches block diagram

| Sensor | Description |
|--------|----------------------------|
| PS3401 | HCl cassette 1 feed sensor |
| PS4501 | HCl cassette 2 feed sensor |

Figure 2-53 HP Stapling Mailbox, sensors and switches block diagram

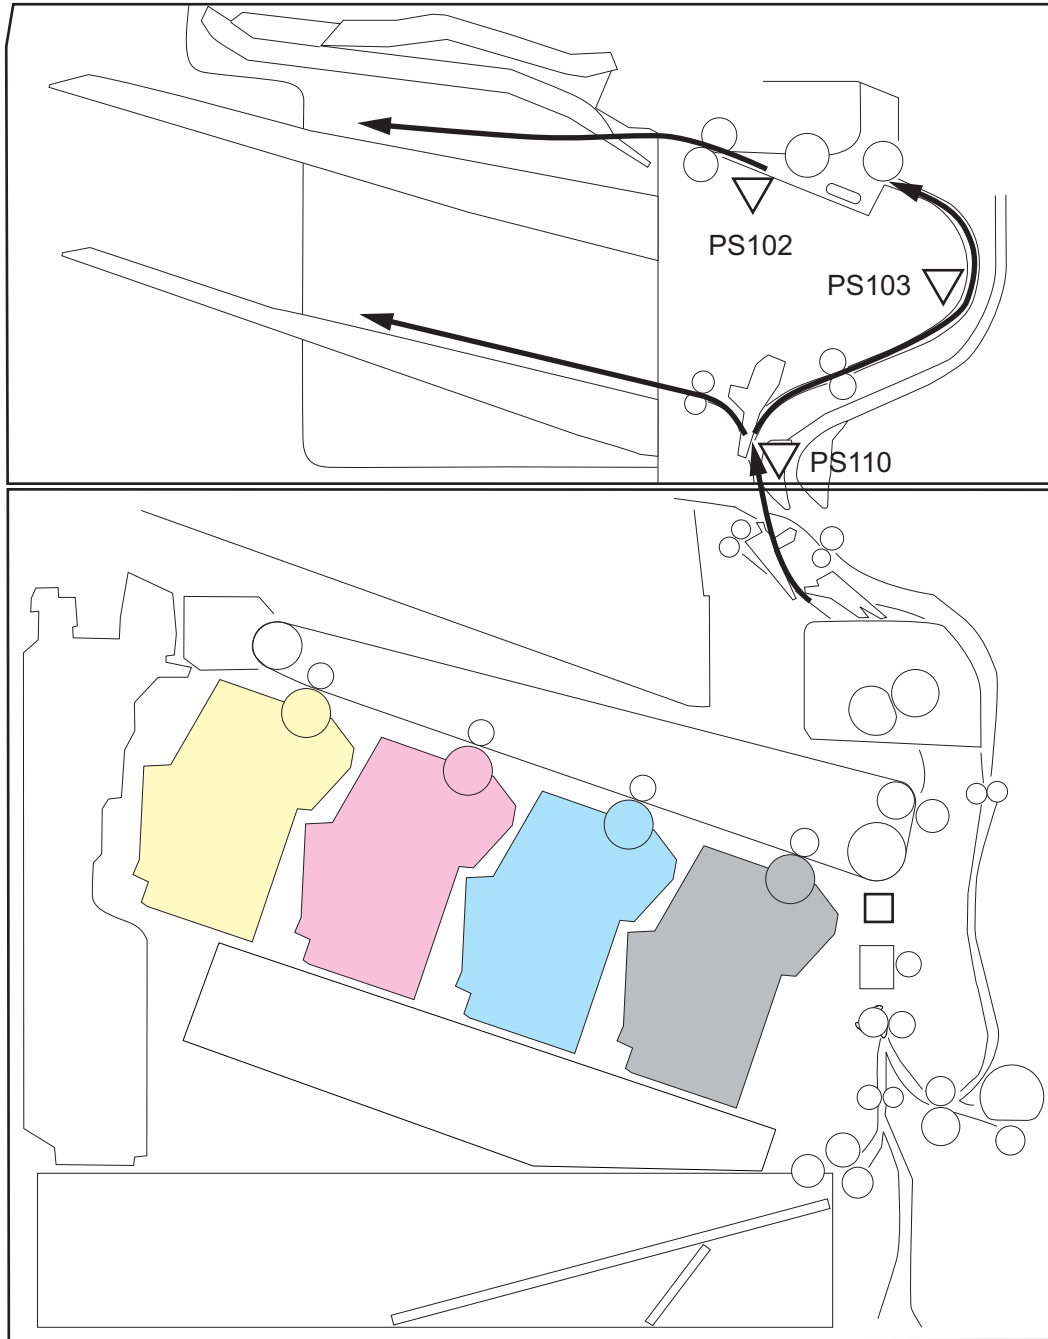


Table 2-19 HP Stapling Mailbox, sensors and switches block diagram

| Sensor | Description |
|--------|------------------------------|
| PS102 | Stapler/stacker exit sensor |
| PS103 | Staple inlet sensor |
| PS110 | Stapler/stacker inlet sensor |

Cross section diagrams

Figure 2-54 Printer base, cross section diagram

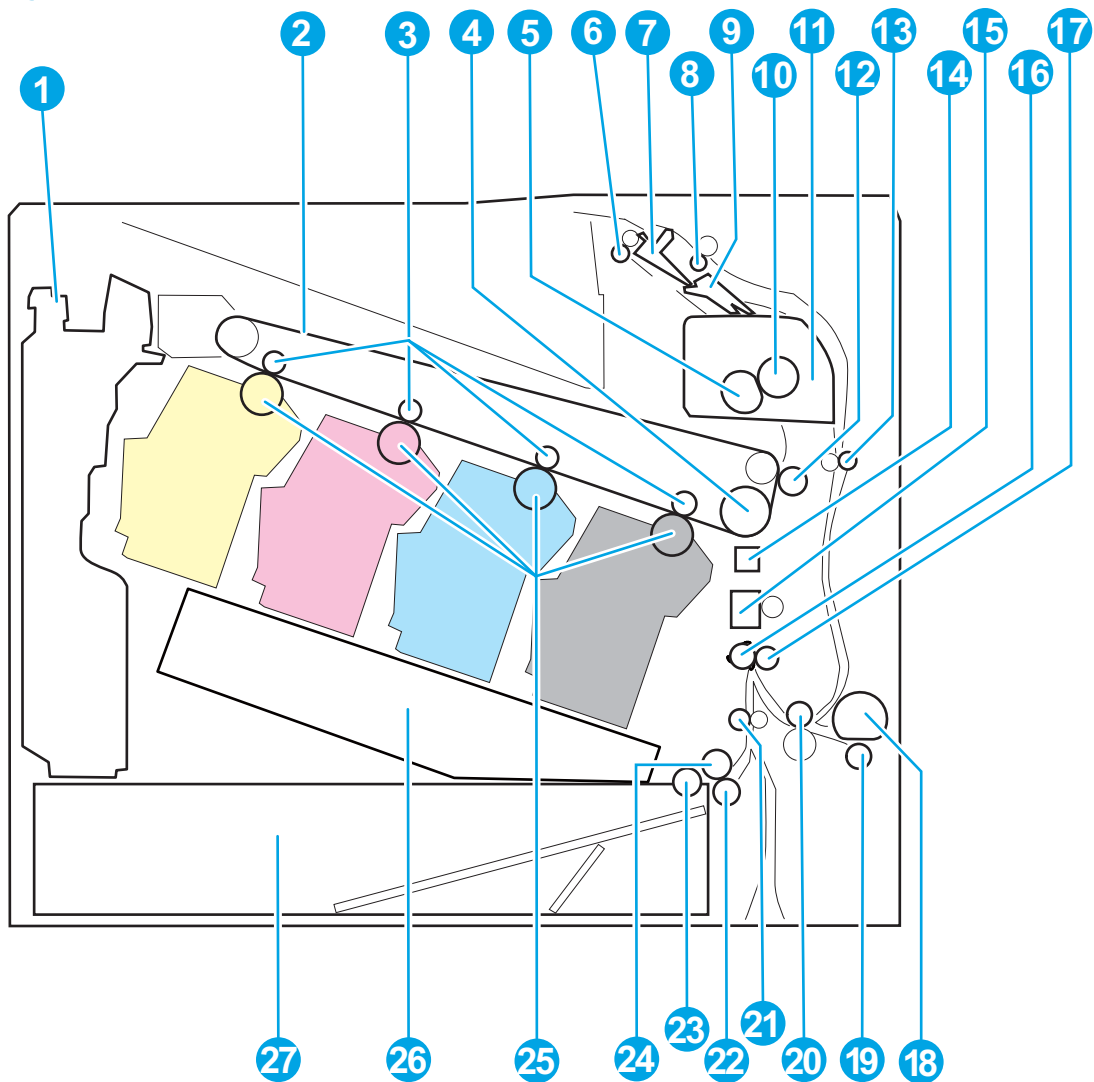


Table 2-20 Product base, cross section diagram

| Item | Description | Item | Description |
|------|--------------------------|------|--------------------------|
| 1 | Toner collection unit | 15 | Media sensor |
| 2 | ITB | 16 | Registration shutter |
| 3 | T1 roller | 17 | Registration roller |
| 4 | ITB drive roller | 18 | Tray 1 pickup roller |
| 5 | Fuser film | 19 | Tray 1 separation roller |
| 6 | Output roller | 20 | Duplex re-pickup roller |
| 7 | Output accessory flapper | 21 | Intermediate feed roller |
| 8 | Duplex switchback roller | 22 | Tray 2 separation roller |
| 9 | Duplex flapper | 23 | Tray 2 pickup roller |

Table 2-20 Product base, cross section diagram (continued)

| Item | Description | Item | Description |
|------|-----------------------------|------|------------------------|
| 10 | Pressure roller | 24 | Tray 2 feed roller |
| 11 | Fuser | 25 | Photosensitive drum |
| 12 | T2 roller | 26 | Laser scanner assembly |
| 13 | Duplex feed roller | 27 | Tray 2 |
| 14 | Registration density sensor | | |

Figure 2-55 1x550-sheet paper feeder, cross section diagram

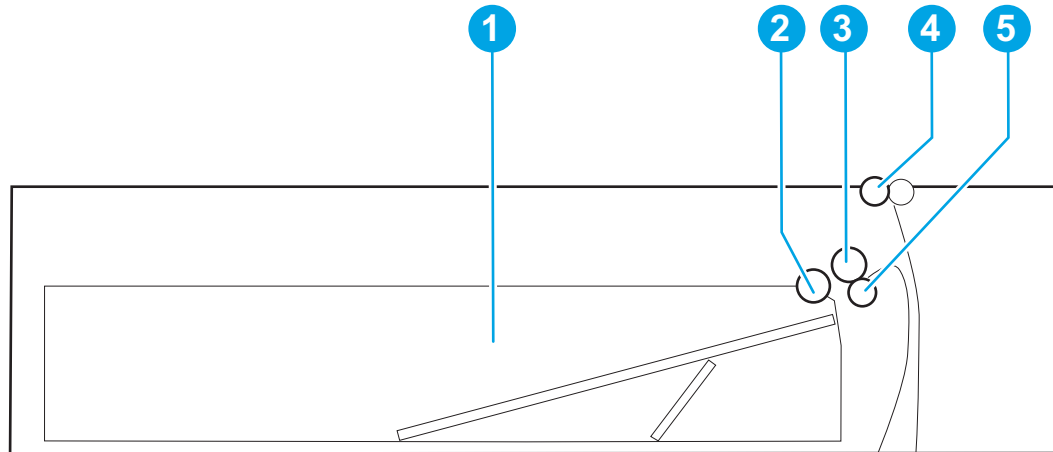


Table 2-21 1x550-sheet paper feeder, cross section diagram

| Item | Description |
|------|----------------------------|
| 1 | Cassette |
| 2 | Cassette pickup roller |
| 3 | Cassette feed roller |
| 4 | Feed roller |
| 5 | Cassette separation roller |

Figure 2-56 Paper deck, 1x550, cross section diagram

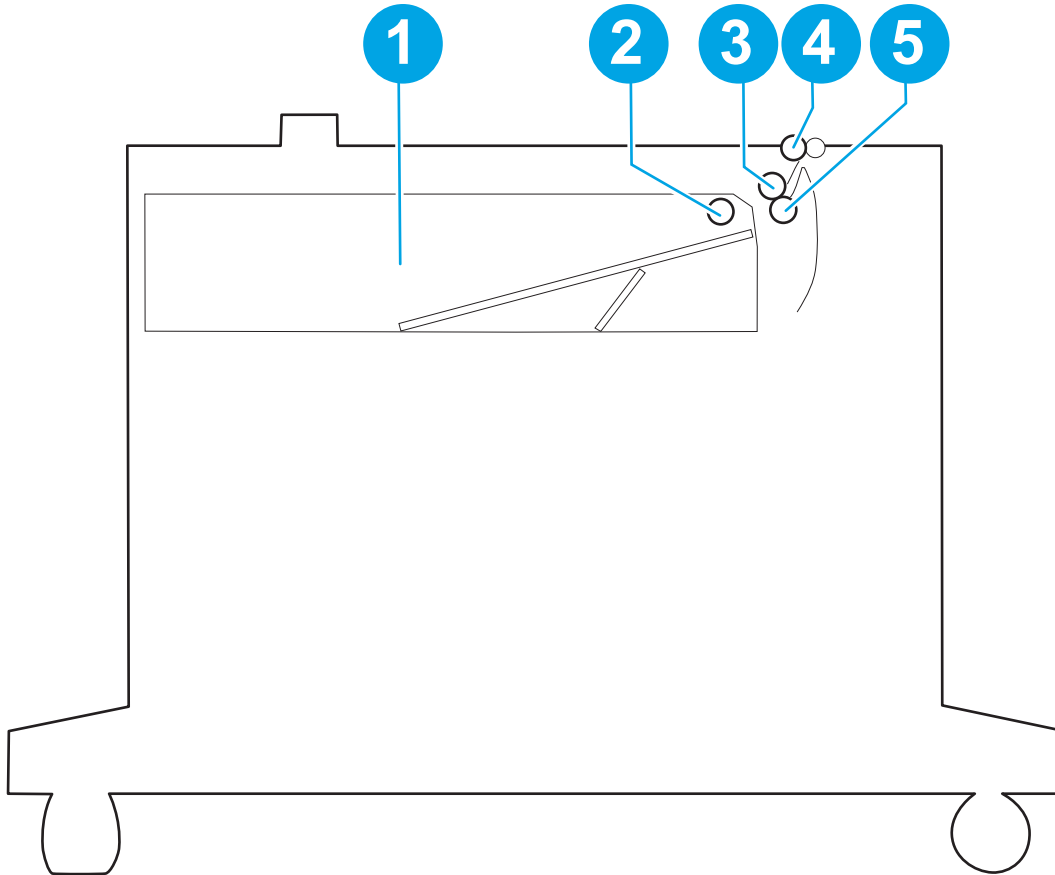


Table 2-22 Paper deck, 1x550, cross section diagram

| Item | Description |
|------|----------------------------|
| 1 | Cassette |
| 2 | Cassette pickup roller |
| 3 | Cassette feed roller |
| 4 | Feed roller |
| 5 | Cassette separation roller |

Figure 2-57 Paper deck, 3x550, cross section diagram

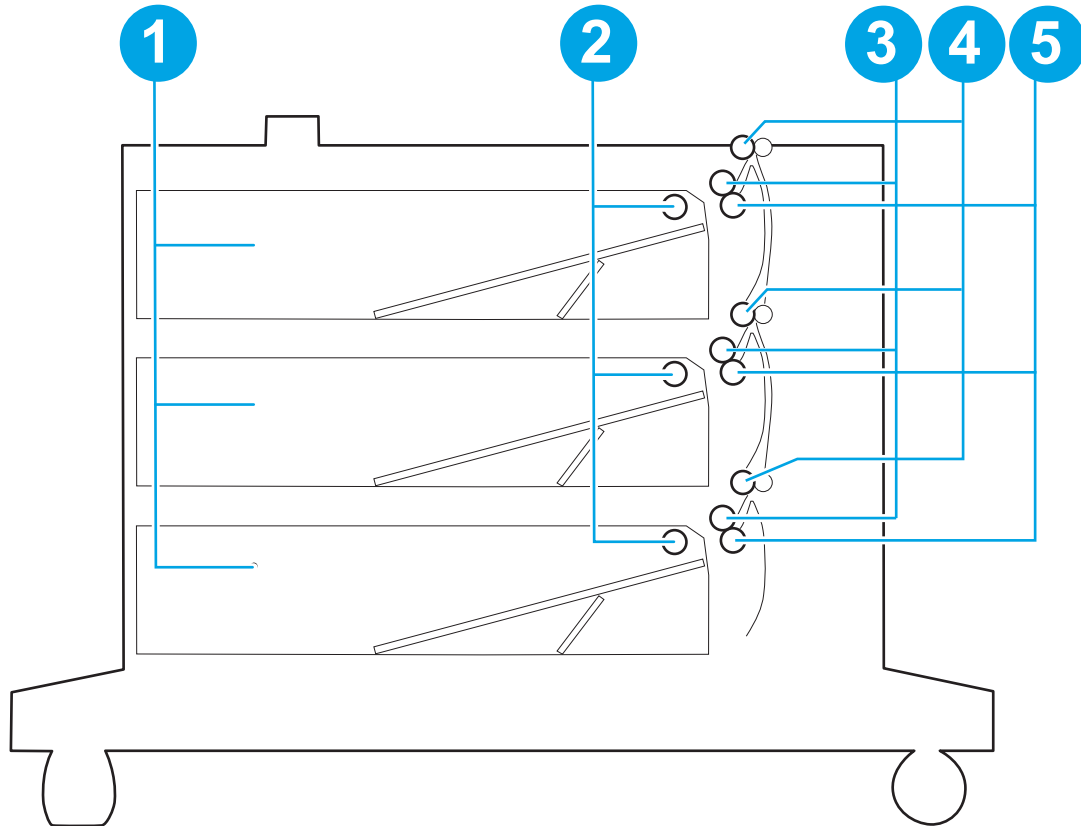


Table 2-23 Paper deck, 3x550, cross section diagram

| Item | Description |
|------|----------------------------|
| 1 | Cassette |
| 2 | Cassette pickup roller |
| 3 | Cassette feed roller |
| 4 | Feed roller |
| 5 | Cassette separation roller |

Figure 2-58 HCl, cross section diagram

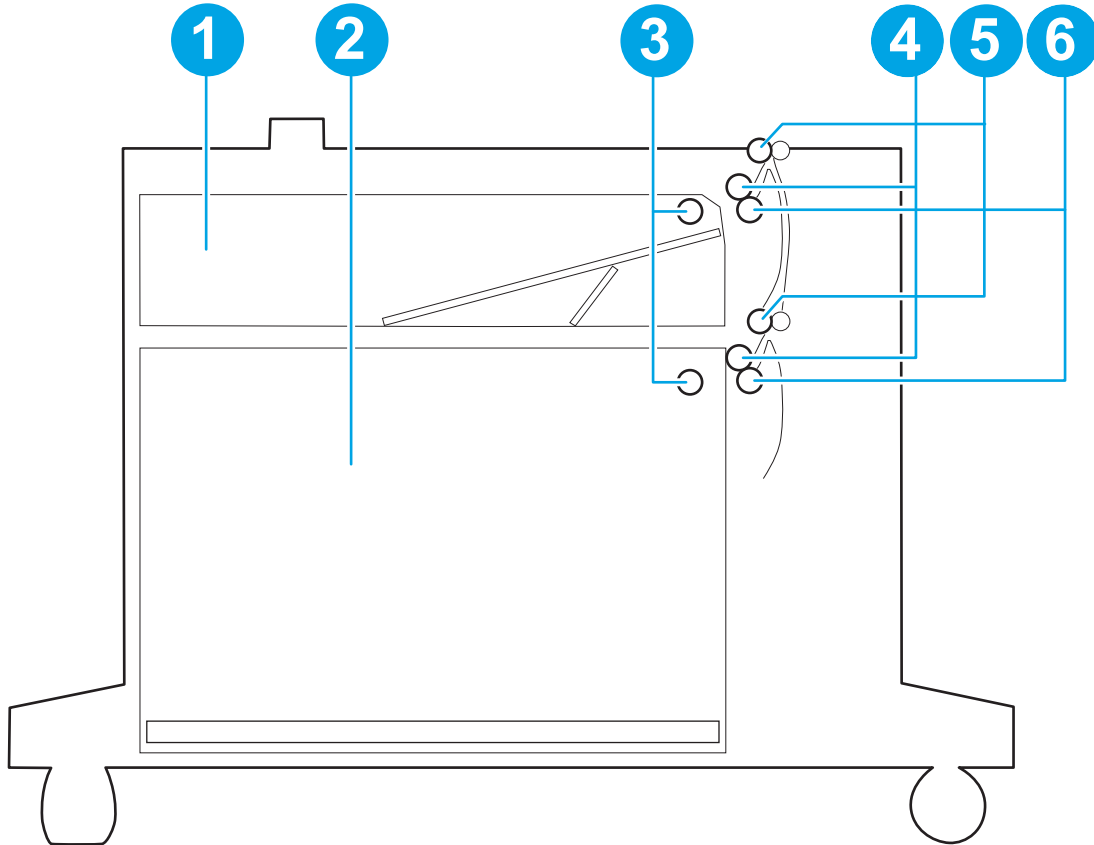


Table 2-24 HCl, cross section diagram

| Item | Description | Item | Description |
|------|------------------------|------|----------------------------|
| 1 | Cassette | 4 | Cassette feed roller |
| 2 | Paper tray | 5 | Feed roller |
| 3 | Cassette pickup roller | 6 | Cassette separation roller |

Figure 2-59 HP Stapling Mailbox, cross section diagram

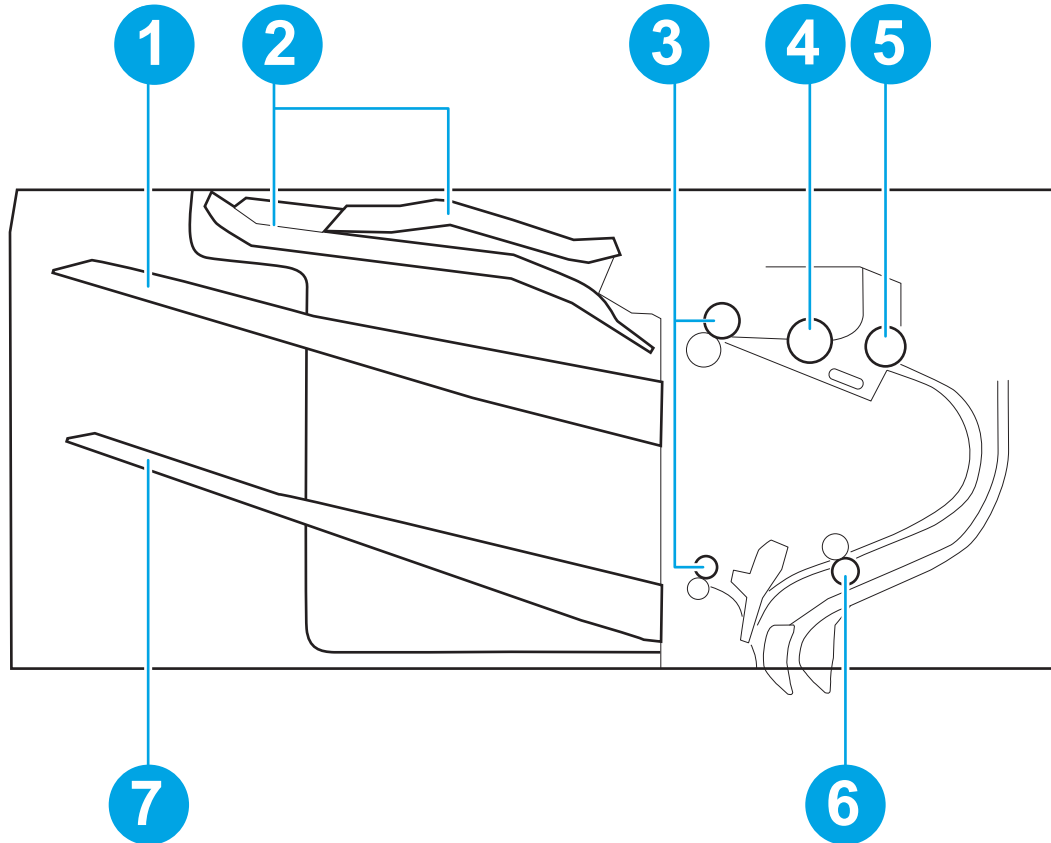


Table 2-25 HP Stapling Mailbox, cross section diagram

| Item | Description | Item | Description |
|------|----------------------------|------|-------------------|
| 1 | Output bin 1 | 5 | Exit feed roller |
| 2 | Jogger guide | 6 | Inlet feed roller |
| 3 | Output bin delivery roller | 7 | Output bin 2 |
| 4 | Alignment roller | | |

Printed circuit assembly (PCA) connector locations

Use the diagrams in this section to identify printer PCA connector locations.

DC controller connections

Each of the connections on the DC controller PCA is indicated in the following figure.

Figure 2-60 DC controller PCA connectors—M652/M653/M681/M682

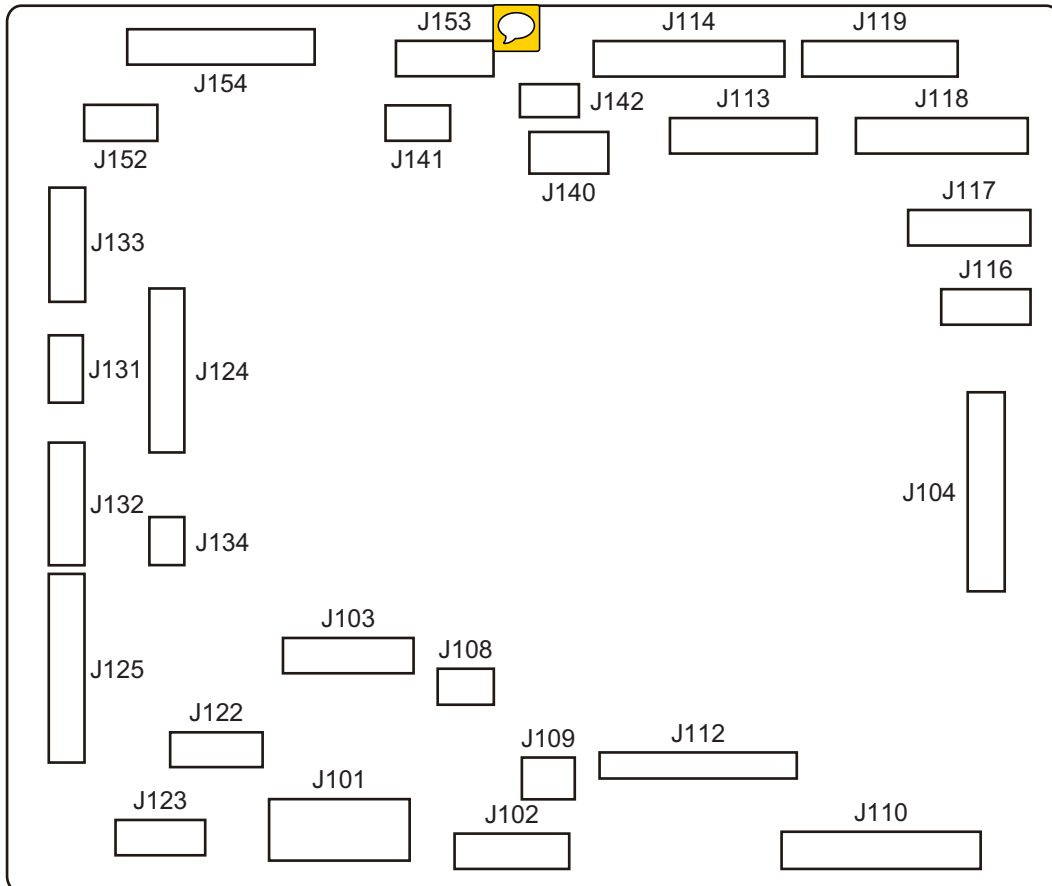


Table 2-26 DC controller connectors—M652/M653/M681/M682

| Item | Description | Item | Description |
|------|--------------------------|------|--|
| J101 | Low-voltage power supply | J122 | Pickup motor |
| J102 | Low-voltage power supply | J123 | Tray 2 media size switch Laser scanner assembly |
| J103 | Low-voltage power supply | J124 | Tray 1 pickup solenoid Duplex feed sensor Tray 1 media out sensor Environment sensor Cartridge fan Tray 2 pickup clutch |

Table 2-26 DC controller connectors—M652/M653/M681/M682 (continued)

| Item | Description | Item | Description |
|------|---|------|--|
| J104 | Formatter | J125 | Input accessory E-label |
| J108 | 24V interlock switch | J131 | Media sensor |
| J109 | 5V interlock switch | J132 | Registration density sensor assembly |
| J110 | Laser scanner assembly | J133 | Duplex re-pickup clutch Registration sensor Registration media width sensor 1 Registration media width sensor 2 |
| J112 | High-voltage power supply D | J134 | Tray 2 media out sensor |
| J113 | High-voltage power supply T | J140 | Not used |
| J114 | High-voltage power supply T | J141 | Not used |
| J116 | Output accessory (MFP only) | J142 | Not used |
| J117 | Drum home position sensor Y Drum home position sensor MC Drum home position sensor K Developer alienation sensor | J152 | Power supply switch FD1 media full sensor |
| J118 | Drum motor 3 Fuser motor T1 roller alienation solenoid | J153 | Duplex flapper position sensor Duplex switchback solenoid Duplex switchback motor |
| J119 | Drum motor 1 Drum motor 2 | J154 | Fuser |



Figure 2-61 DC controller PCA connectors—E65150/E65160/E67650/E67660

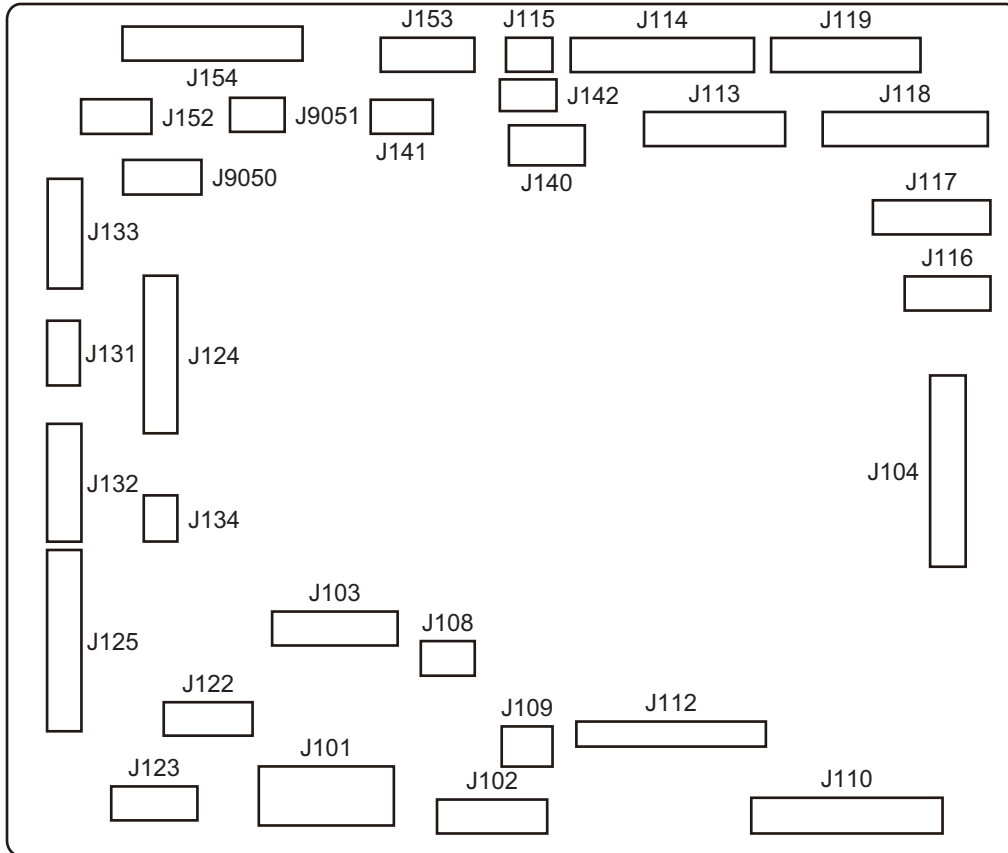


Table 2-27 DC controller connectors—E65150/E65160/E67650/E67660

| Item | Description | Item | Description |
|------|--------------------------|------|--|
| J101 | Low-voltage power supply | J123 | Tray 2 media size switch Laser scanner assembly |
| J102 | Low-voltage power supply | J124 | Tray 1 pickup solenoid Duplex feed sensor Tray 1 media out sensor Environment sensor Cartridge fan Tray 2 pickup clutch |
| J103 | Low-voltage power supply | J125 | Input accessory E-label |
| J104 | Formatter | J131 | Media sensor |
| J108 | 24V interlock switch | J132 | Registration density sensor assembly |

Table 2-27 DC controller connectors—E65150/E65160/E67650/E67660 (continued)

| Item | Description | Item | Description |
|------|---|-------|--|
| J109 | 5V interlock switch | J133 | Duplex re-pickup clutch Registration sensor Registration media width sensor 1 Registration media width sensor 2 |
| J110 | Laser scanner assembly | J134 | Tray 2 media out sensor |
| J112 | High-voltage power supply D | J140 | Not used |
| J113 | High-voltage power supply T | J141 | Not used |
| J114 | High-voltage power supply T | J142 | Not used |
| J115 | Not used | J152 | Power supply switch FD1 media full sensor |
| J116 | Output accessory (MFP only) | J153 | Duplex flapper position sensor Duplex switchback solenoid Duplex switchback motor |
| J117 | Drum home position sensor Y Drum home position sensor MC Drum home position sensor K Developer alienation sensor | J154 | Fuser |
| J118 | Drum motor 3 Fuser motor T1 roller alienation solenoid | J9050 | Not used |
| J119 | Drum motor 1 Drum motor 2 | J9051 | Front door left lock solenoid Front door right lock solenoid |
| J122 | Pickup motor | | |

Formatter PCA (M652/M653/E65050/E65060/E65150/E65160)

Each of the connections on the M652/M653/E65050/E65060/E65150/E65160 formatter PCA is indicated in the following figure.

Figure 2-62 Formatter PCA connectors—M652/M653/E65050/E65060/E65150/E65160

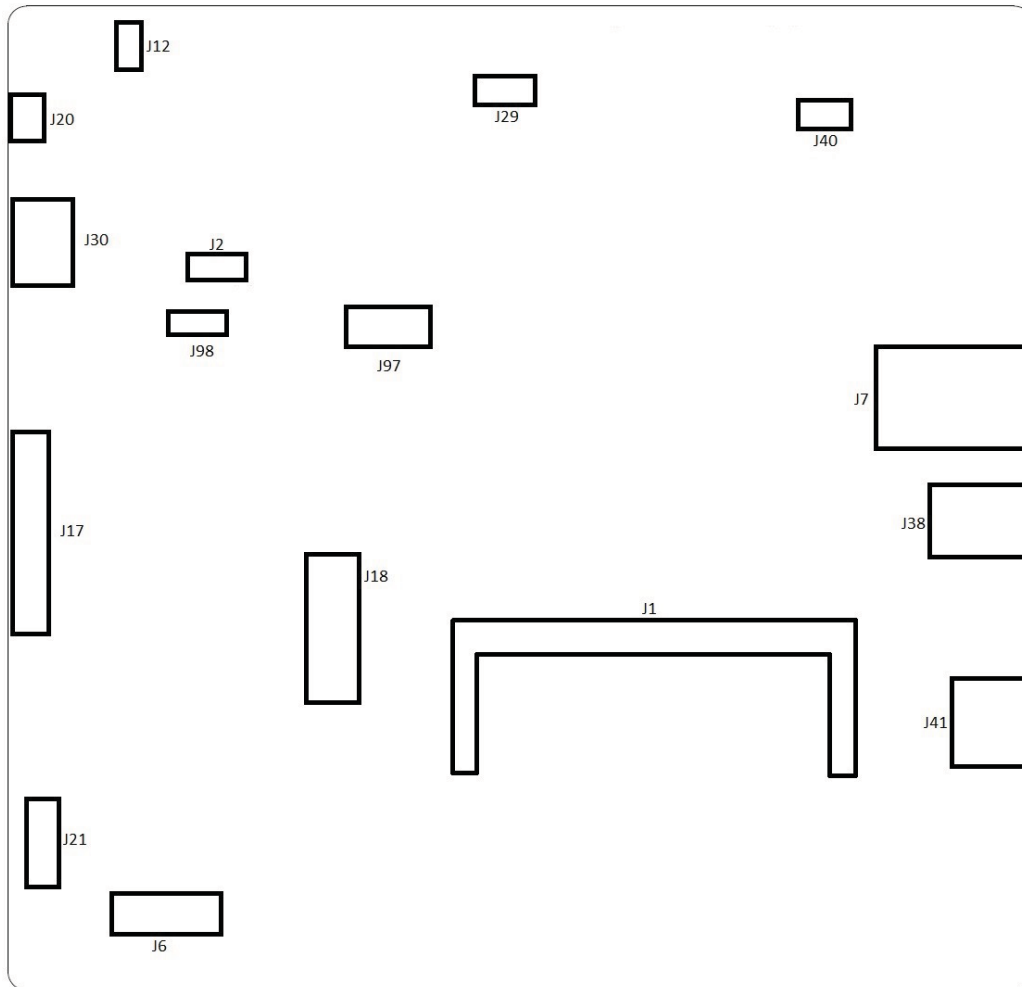


Table 2-28 Formatter PCA connectors—M652/M653/E65050/E65060/E65150/E65160

| Item | Description | Item | Description |
|------|-----------------------------|------|--|
| J1 | SO-DIMM | J21 | Internal USB ports (AA module) connector |
| J2 | Control panel power | J29 | I/O connector |
| J6 | Engine power | J30 | Control panel HDMI |
| J7 | Ethernet | J38 | Host USB |
| J12 | HIP cable connector | J40 | Wireless/Bluetooth module connector |
| J17 | Engine VIF | J41 | Device USB |
| J18 | HDD riser connector | J97 | eMMC connector |
| J20 | Walk-up USB cable connector | J98 | Aux connector |

Formatter PCA—M681/M682/E67550/E67560/E67650/E67660

Each of the connections on the M681/M682/E67550/E67560/E67650/E67660 formatter PCA is indicated in the following figure.

Figure 2-63 Formatter PCA connectors—M681/M682/E67550/E67560/E67650/E67660

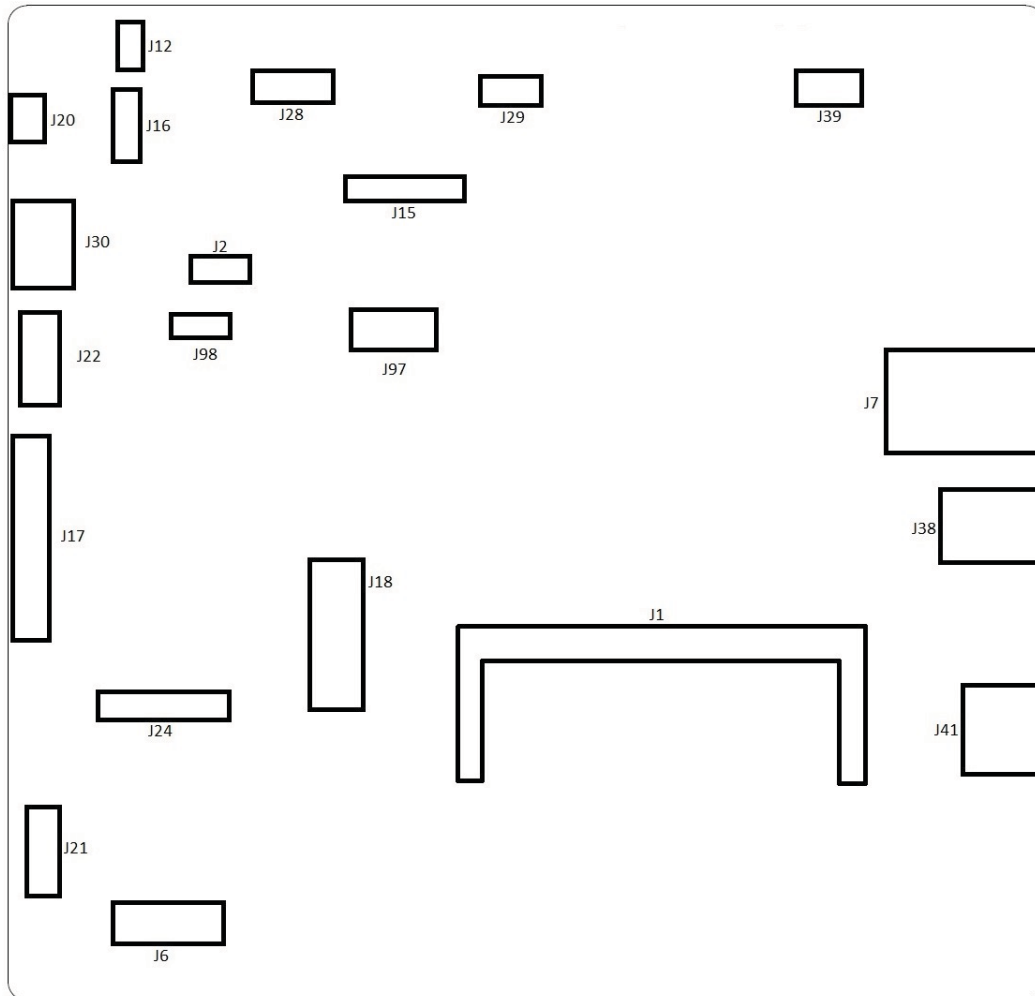


Table 2-29 Formatter PCA connectors—M681/M682/E67550/E67560/E67650/E67660

| Item | Description | Item | Description |
|------|---------------------|------|---------------------------------|
| J1 | SO-DIMM | J24 | FEPS connector |
| J6 | Engine power | J28 | CAN connector for output device |
| J7 | Ethernet | J29 | IOD connector |
| J12 | HIP cable connector | J30 | Control panel HDMI |
| J15 | Fax card connector | J38 | Host USB |
| J16 | Control panel power | J39 | Wireless/BLD module connector |
| J17 | Engine VIF | J41 | Device USB |
| J18 | HDD riser connector | J97 | eMMC connector |

Table 2-29 Formatter PCA connectors—M681/M682/E67550/E67560/E67650/E67660 (continued)

| Item | Description | Item | Description |
|------|--|------|---------------|
| J20 | Walk-up USB cable connector | J98 | Aux connector |
| J21 | Internal USB ports (AA module) connector | | |

1x550-sheet paper feeder controller PCA connections

Each of the connections on the 1x550-sheet paper feeder controller PCA is indicated in the following figure.

Figure 2-64 1x550-sheet paper feeder controller PCA connectors

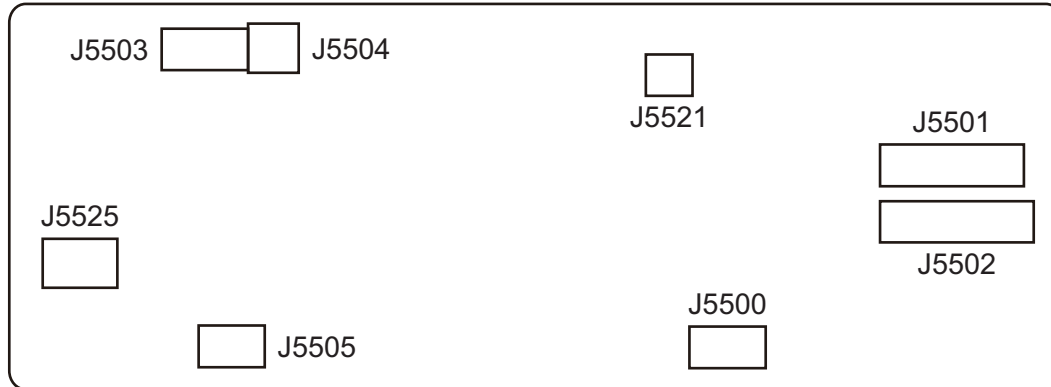


Table 2-30 1x550-sheet paper feeder controller PCA connectors

| Item | Description | Item | Description |
|-------|---|-------|--------------------------------|
| J5500 | Not used | J5504 | Paper feeder door switch |
| J5501 | Printer or paper feeder | J5505 | Paper feeder media size switch |
| J602 | Paper feeder | J5521 | Paper feeder pickup clutch |
| J5503 | Paper feeder feed sensor Paper feeder media out sensor | J5525 | Paper feeder feed motor |

Paper decks

Each of the connections on the paper deck controller PCA is indicated in the following figure.

Figure 2-65 Paper deck controller PCA connectors, 1x550

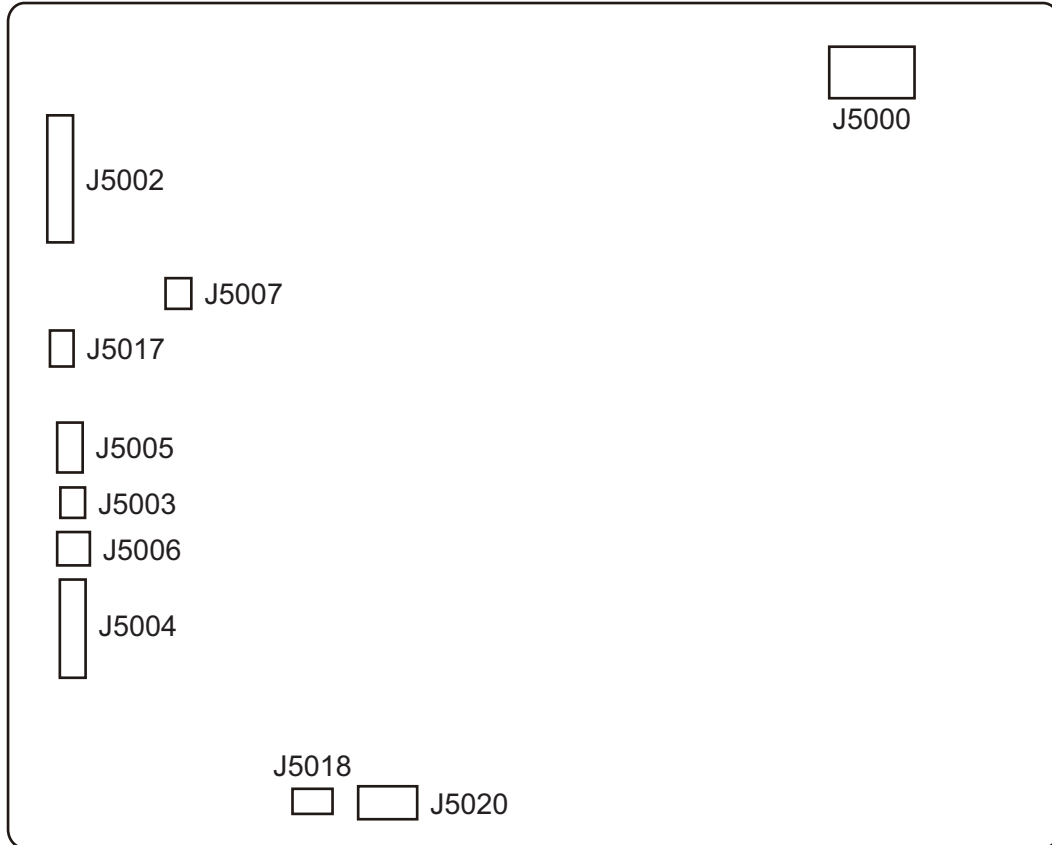


Table 2-31 Paper deck controller PCA connectors, 1x550

| Item | Description | Item | Description |
|-------|---|-------|--|
| J5000 | Not used | J5006 | Paper deck door switch |
| J5002 | Printer | J5007 | Paper deck cassette 1 lifter motor |
| J5003 | Paper deck cassette 1 media size switch 2 | J5017 | Paper deck cassette 1 pickup clutch |
| J5004 | Paper deck cassette 1 feed sensor Paper deck cassette 1 media out sensor Paper deck cassette 1 media surface sensor | J5018 | Paper deck pickup roller alienation sensor |
| J5005 | Paper deck cassette 1 media size switch 1 | J5020 | Paper deck feed motor 1 |

Figure 2-66 Paper deck controller PCA connectors, 3x550 and 2,550

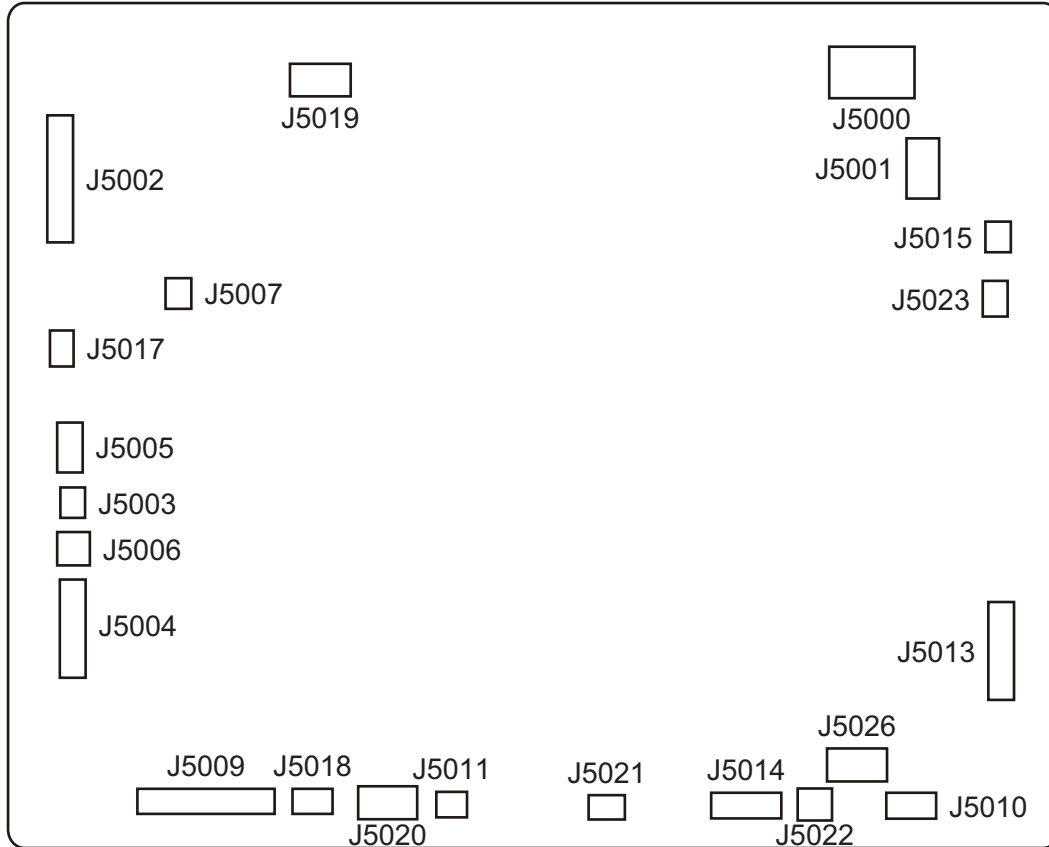


Table 2-32 Paper deck controller PCA connectors, 3x550 and 2,550

| Item | Description | Item | Description |
|-------|---|-------|---|
| J5000 | Not used | J5013 | Paper deck cassette 3 feed sensor (3x550-sheet paper deck only) Paper deck cassette 3 media out sensor (3x550-sheet paper deck only) Paper deck cassette 3 media surface sensor (3x550-sheet paper deck only) |
| J5001 | Paper deck feed motor 3 (3x550-sheet paper deck only) | J5014 | Paper deck cassette 3 media size switch 2 (3x550-sheet paper deck only) Paper deck cassette 3 media size switch 1 (3x550-sheet paper deck only) |
| J5002 | Printer or paper feeder | J5015 | Paper deck cassette 3 lifter motor (3x550-sheet paper deck only) |
| J5003 | Paper deck cassette 1 media size switch 2 | J5017 | Paper deck cassette 1 pickup clutch |
| J5004 | Paper deck cassette 1 feed sensor Paper deck cassette 1 media out sensor Paper deck cassette 1 media surface sensor | J5018 | Paper deck pickup roller alienation sensor |
| J5005 | Paper deck cassette 1 media size switch 1 | J5019 | Paper deck cassette 2 lifter motor (2,550-sheet paper deck only) |

Table 2-32 Paper deck controller PCA connectors, 3x550 and 2,550 (continued)

| Item | Description | Item | Description |
|-------|---|-------|---|
| J5006 | Paper deck door switch | J5020 | Paper deck feed motor 1 |
| J5007 | Paper deck cassette 1 lifter motor | J5021 | Paper deck cassette 2 pickup clutch |
| J5009 | Paper deck cassette 2 feed sensor Paper deck cassette 2 media out sensor Paper deck cassette 2 media surface sensor | J5022 | Paper deck cassette 2 media size switch 2 (3x550-sheet paper deck only) |
| J5010 | Paper deck cassette 2 media size switch 1 | J5023 | Paper deck cassette 3 pickup clutch (3x550-sheet paper deck only) |
| J5011 | Paper deck cassette 2 lifter motor (3x550-sheet paper deck only) | J5026 | Paper deck feed motor 2 |

Stapling mailbox

Each of the connections on the HP Stapling Mailbox controller PCA is indicated in the following figure.

Figure 2-67 HP Stapling Mailbox controller PCA connectors

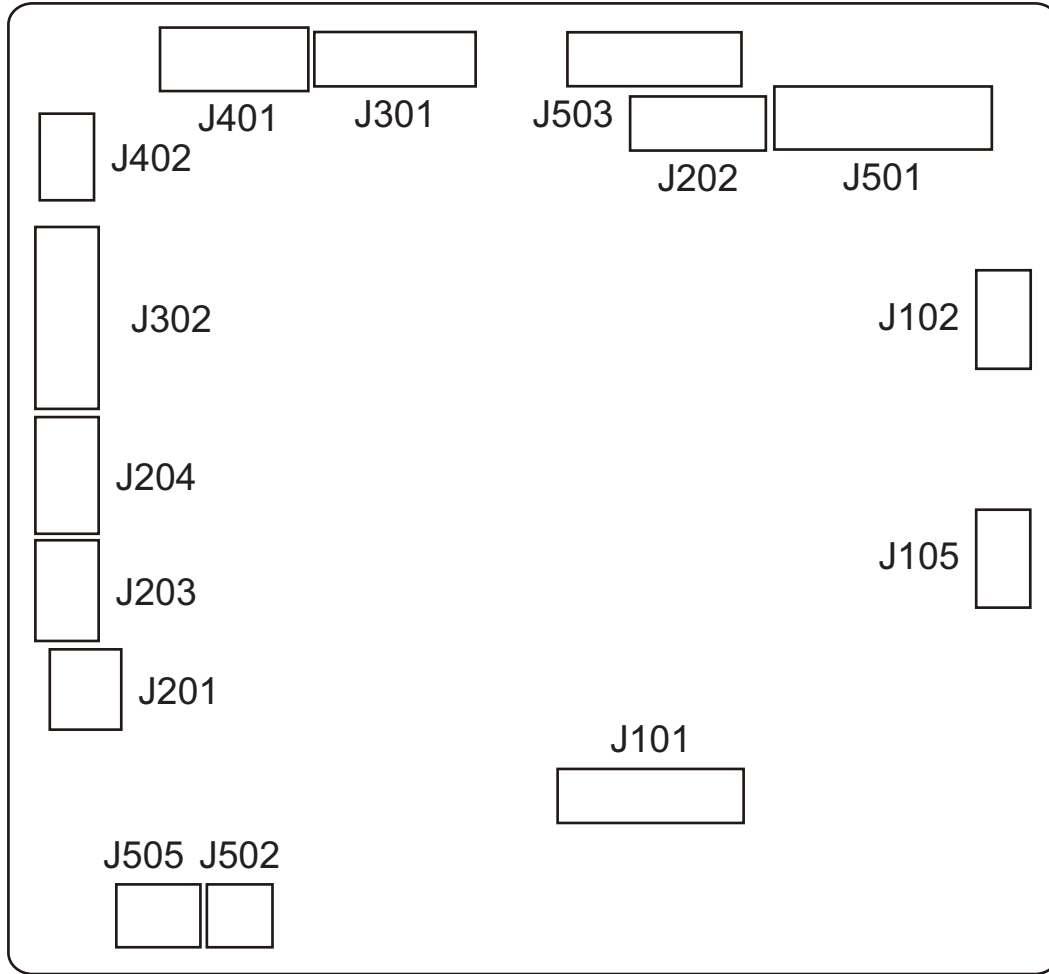


Table 2-33 HP Stapling Mailbox controller PCA connectors

| Item | Description | Item | Description |
|------|--------------------|------|---|
| J101 | Printer | J302 | Y alignment motor Alienation home position sensor Stapler/stacker door switch |
| J102 | Not used | J401 | Jogger motor Jogger home position sensor |
| J105 | Not used | J402 | Stapler/stacker feed motor |
| J201 | Staple door switch | J501 | Bin 2 media presence sensor Bin 2 media full sensor Stapler/stacker inlet sensor Output bin 2 flapper solenoid |

Table 2-33 HP Stapling Mailbox controller PCA connectors (continued)

| Item | Description | Item | Description |
|------|---|------|---|
| J202 | Lifter motor Bin 1 upper limit sensor Bin 1 lower limit sensor | J502 | Inlet flapper solenoid |
| J203 | Stapler | J503 | Bin 1 media presence sensor Stapler/stacker exit sensor Staple inlet sensor Stamp solenoid |
| J204 | Stapler | J505 | Mailbox fan |
| J301 | Stapler/stacker output motor Y alignment home position sensor Bin 1 media full sensor | | |

Scanner assembly

Each of the connections on the scanner controller PCA is indicated in the following figure.

Figure 2-68 Scanner controller PCA connectors

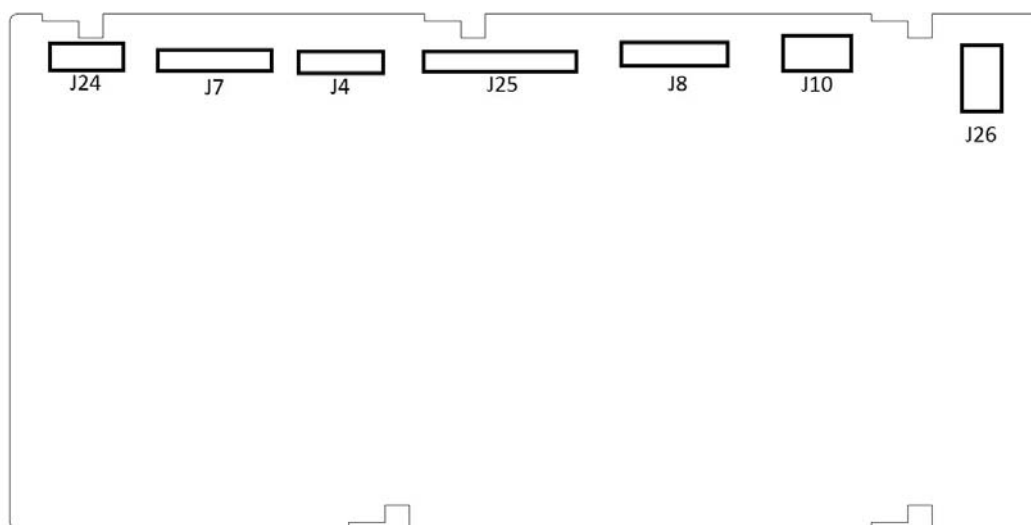



Table 2-34 Scanner controller PCA connectors

| Item | Description | Item | Description |
|------|---------------------------|------|-------------------------|
| J4 | ADF sensors | J24 | ADF motor |
| J7 | ADF side 2 scan data | J25 | Flatbed side1 scan data |
| J8 | Flatbed motor and sensors | J26 | Scanner power |
| J10 | Scanner data | | |

Diagrams: External plug and port locations

Use the following figure to locate and identify the printer external port locations.


Figure 2-69 External plug and port locations (M652/M653/E65050/E65060/E65150/E65160)

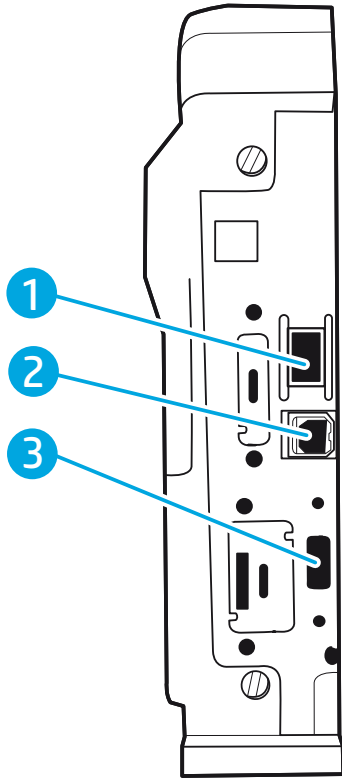

-
- | | |
|---|---|
| 1 | Local area network (LAN) Ethernet 10/100/1000 network port |
| 2 | Hi-Speed USB 2.0 printing port |
| 3 | USB port for connecting external USB devices (this port might be covered) |
-

NOTE: For easy-access USB printing, use the USB port near the control panel.

Figure 2-70 External plug and port locations (M681/M682/E67550/E67560/E67650/E67660)

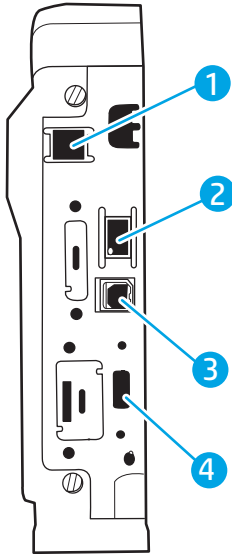

-
- | | |
|---|---|
| 1 | Fax port (f and z models only. The port is covered for the dh models.) |
| 2 | Local area network (LAN) Ethernet 10/100/1000 Ethernet network port |
| 3 | Hi-Speed USB 2.0 printing port |
| 4 | USB port for connecting external USB devices (this port might be covered) |
-

NOTE: For easy-access USB printing, use the USB port near the control panel.

Diagrams: Locations of major assemblies

Use the figure in this section to identify and locate major components and assemblies in the printer.

Main assemblies (printer base)

Figure 2-71 Main assemblies

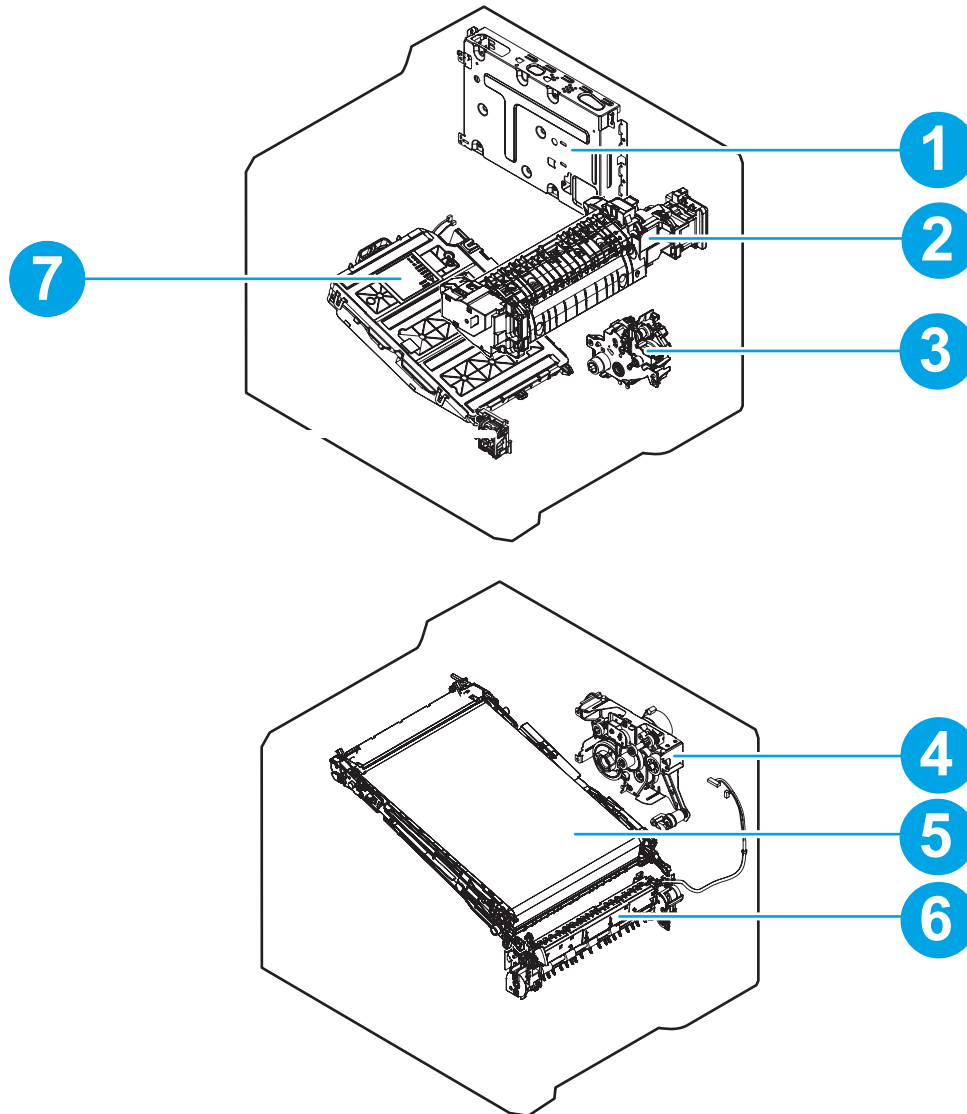


Table 2-35 Main assemblies (printer base)

| Item | Description | Item | Description |
|------|-------------------------|------|------------------------|
| 1 | Formatter case assembly | 5 | ITB assembly |
| 2 | Fuser | 6 | Registration assembly |
| 3 | Lifter drive assembly | 7 | Laser scanner assembly |
| 4 | Fuser drive assembly | | |

Figure 2-72 Main assemblies

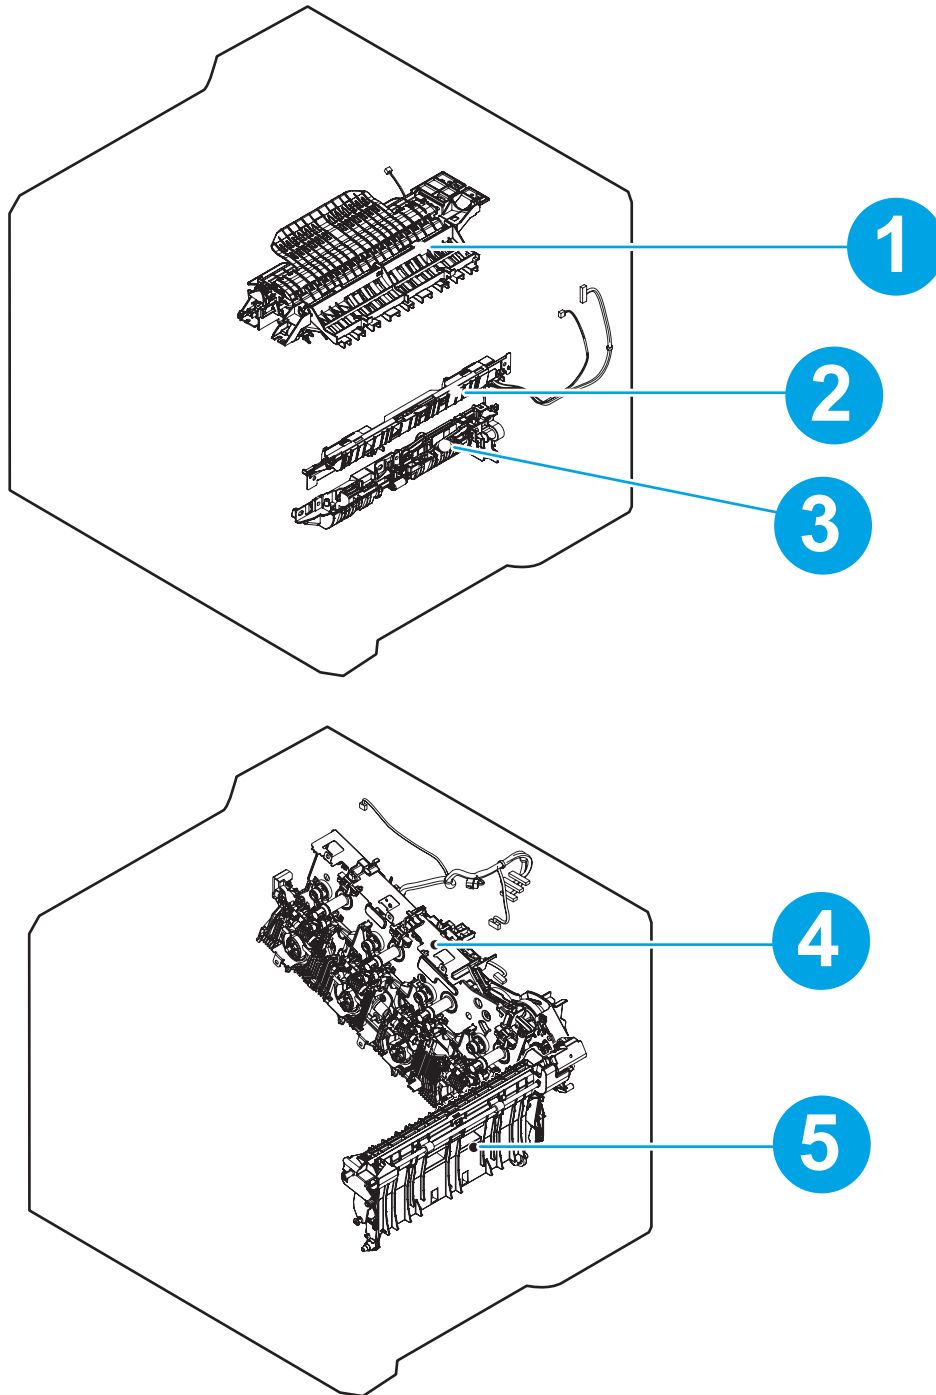


Table 2-36 Main assemblies (printer base)

| Item | Description | Item | Description |
|------|--------------------------------------|------|---------------------|
| 1 | Delivery assembly | 4 | Main drive assembly |
| 2 | Registration density sensor assembly | 5 | T2 assembly |
| 3 | Pickup assembly | | |

Motor and fans

Figure 2-73 Motors

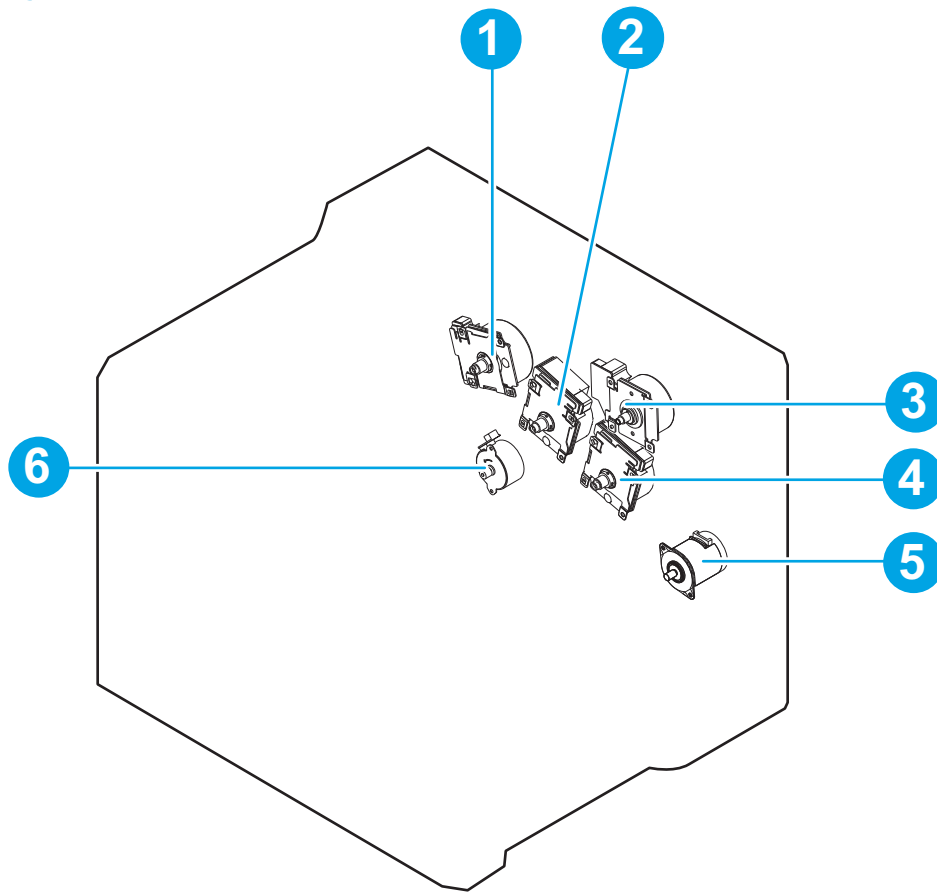


Table 2-37 Motors

| Item | Description | Item | Description |
|------|--------------|------|----------------------------|
| 1 | Drum motor 1 | 4 | Drum motor 3 |
| 2 | Drum motor 2 | 5 | Pickup motor |
| 3 | Fuser motor | 6 | Developer alienation motor |

Figure 2-74 Fans

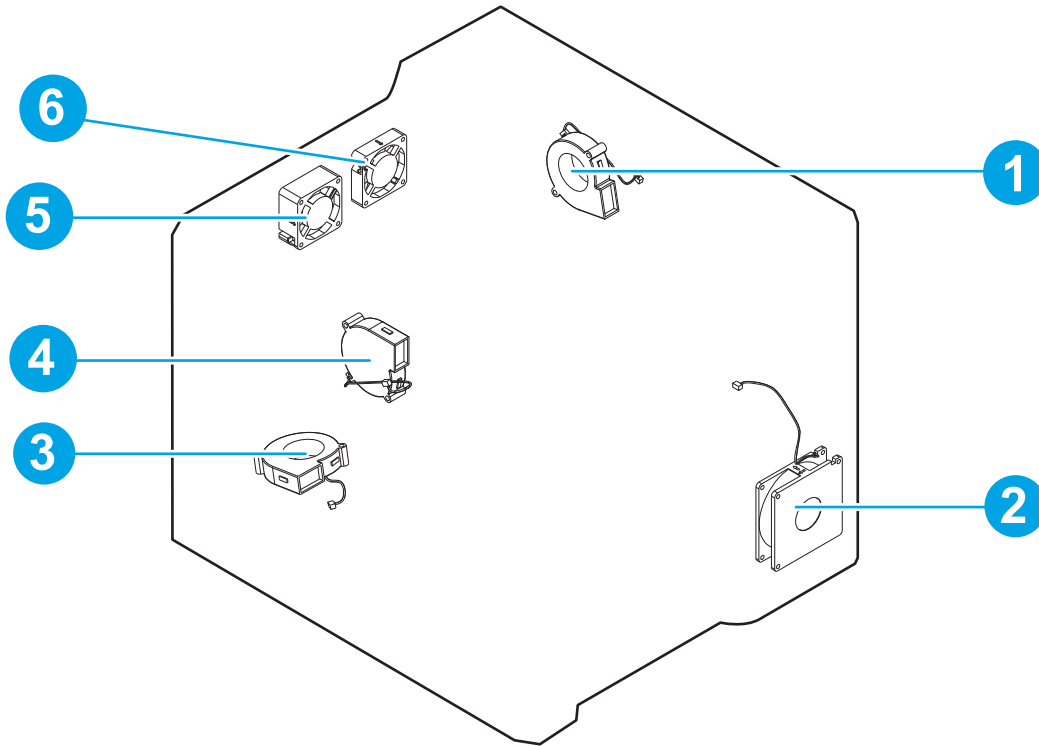


Table 2-38 Fans

| Item | Description | Item | Description |
|------|------------------------|------|----------------------------|
| 1 | Rear fan (FM6) | 4 | Front fan (FM5) |
| 2 | Power supply fan (FM1) | 5 | Left upper front fan (FM3) |
| 3 | Cartridge fan (FM2) | 6 | Left upper rear fan (FM4) |

Rollers and toner collection unit

Figure 2-75 Rollers

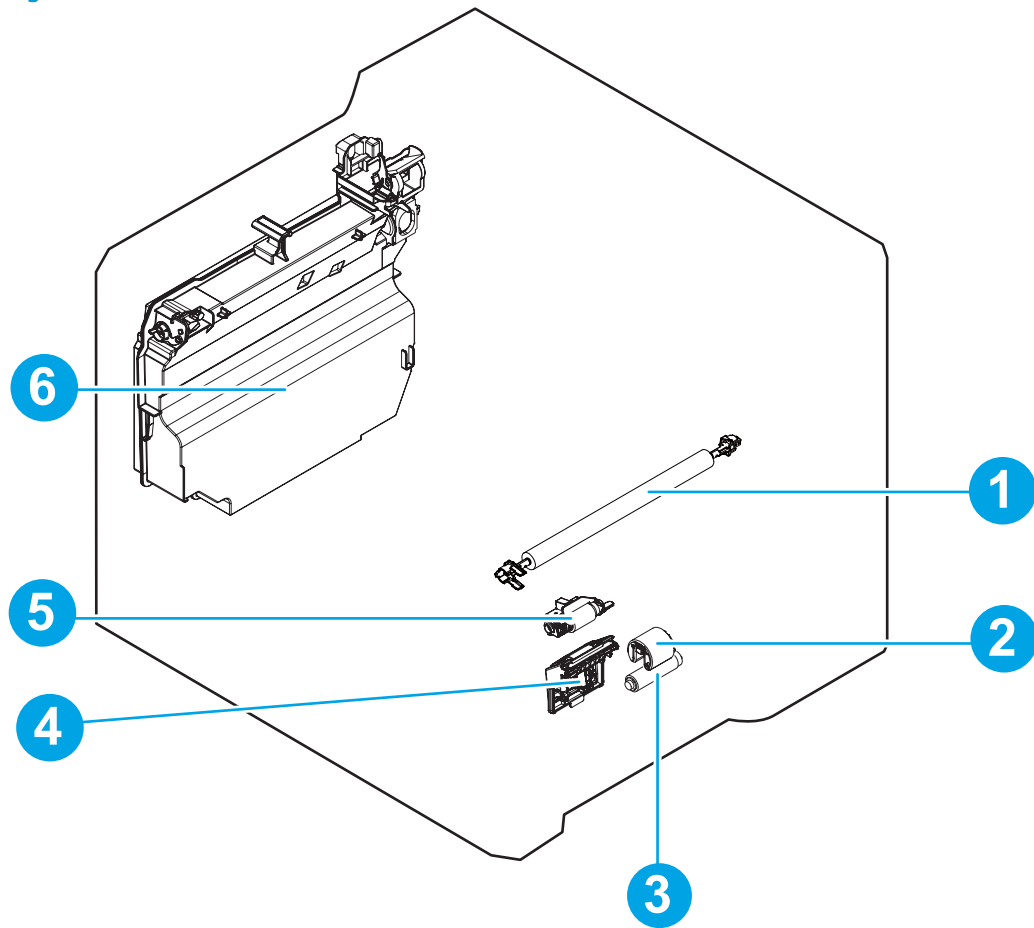


Table 2-39 Rollers

| Item | Description | Item | Description |
|------|--------------------------|------|-----------------------------------|
| 1 | T2 roller assembly | 4 | Tray 2 separation roller assembly |
| 2 | Tray 1 pickup roller | 5 | Tray 2 pickup roller assembly |
| 3 | Tray 1 separation roller | 6 | Toner collection unit |

Printed circuit assemblies (PCAs; printer base)

Figure 2-76 PCAs (printer base)

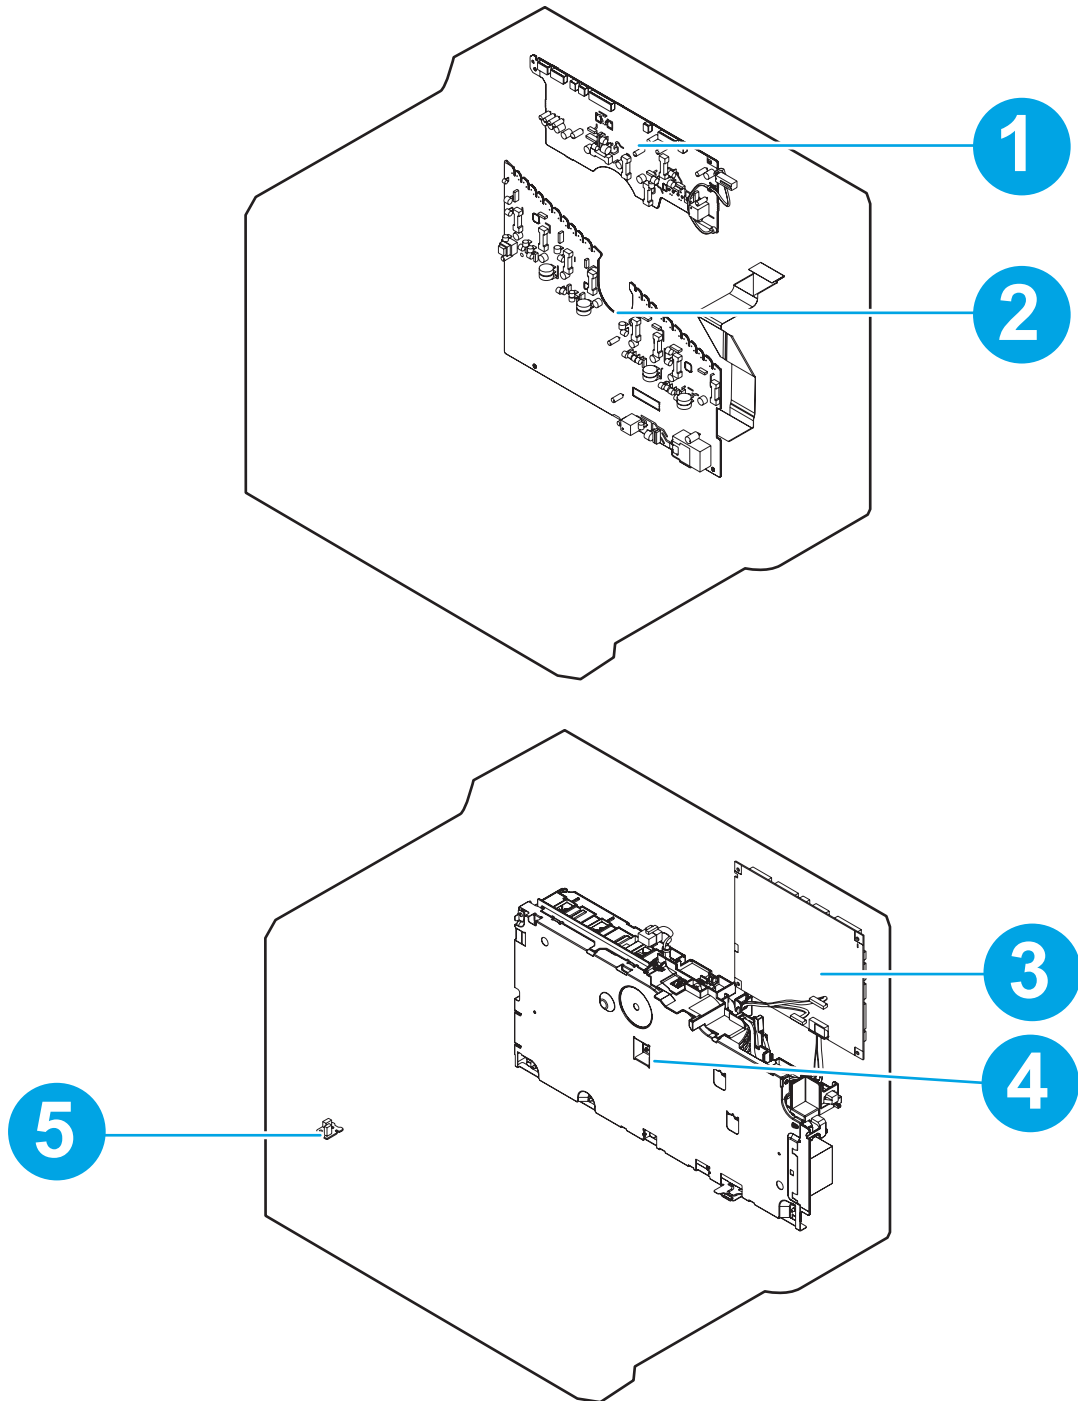


Table 2-40 PCAs (printer base)

| Item | Description | Item | Description |
|------|---|------|--------------------------|
| 1 | High-voltage power supply T (transfer) PCA | 4 | Low-voltage power supply |
| 2 | High-voltage power supply D (developer) PCA | 5 | Environment sensor |
| 3 | DC controller PCA | | |

Switches—E65150/E65160/E67650/E67660 models

Figure 2-77 Switches—E65150/E65160/E67650/E67660 models

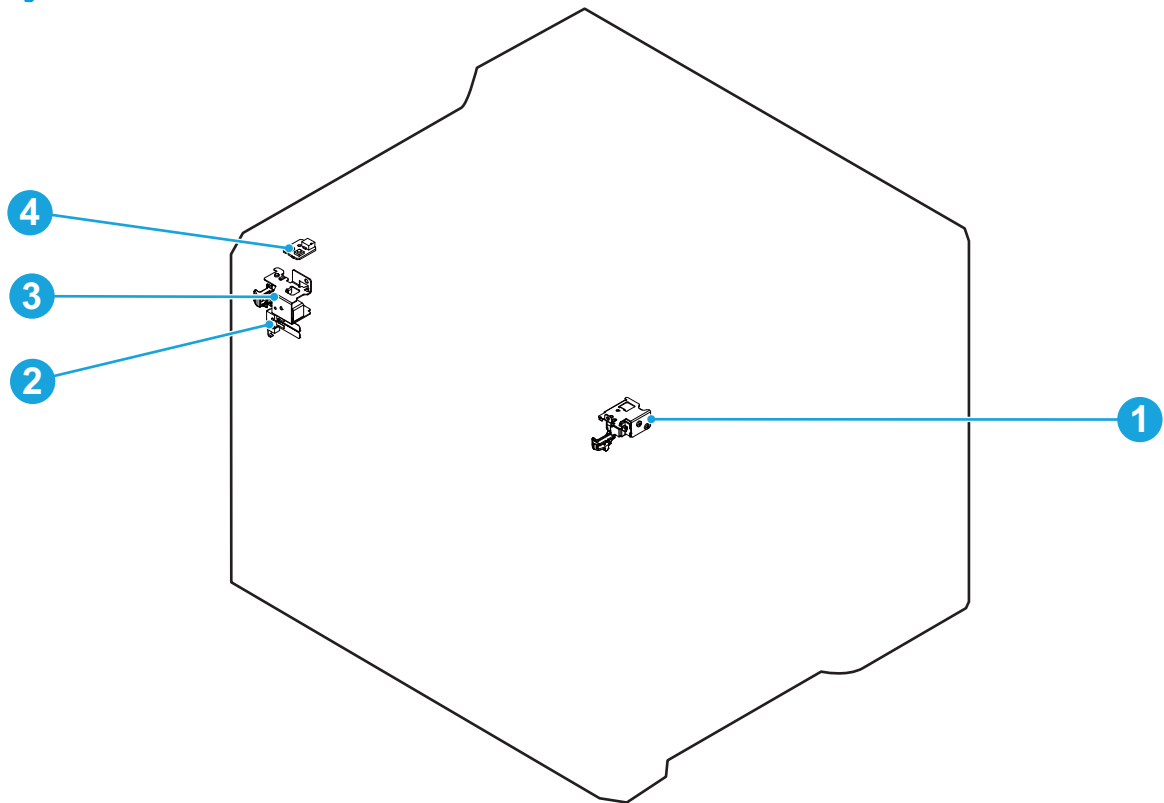


Table 2-41 Switches—E65150/E65160/E67650/E67660 models

| Item | Description | Item | Description |
|------|--------------------------|------|-----------------------------|
| 1 | Front door right lock | 3 | Front door left lock |
| 2 | 5V left interlock switch | 4 | Cartridge access switch PCA |

Diagrams: General timing chart

Figure 2-78 General timing chart

Timing chart two consecutive prints on LTR paper (Full-color 1/1 speed mode)
 Power ON

| Operation | STBY | INTR | PRINT | LSTR | STBY |
|------------------------------|------|------|-------|------|------|
| 1 Tray 2 pickup clutch | | █ | █ | | |
| 2 Registration sensor | | █ | █ | | |
| 3 Fuser output sensor | | | █ | | |
| 4 Fuser motor | | █ | █ | | |
| 5 Scanner motor | | █ | █ | | |
| 6 TOP signal | | █ | █ | | |
| 7 Drum motor 1 | | █ | █ | | |
| 8 Drum motor 2 | | █ | █ | | |
| 9 Drum motor 3 | | █ | █ | | |
| 10 Pickup motor | | █ | █ | | |
| 11 Primary charging bias (Y) | | █ | █ | | |
| 12 Primary charging bias (M) | | █ | █ | | |
| 13 Primary charging bias (C) | | █ | █ | | |
| 14 Primary charging bias (K) | | █ | █ | | |
| 15 Developing bias (Y) | | █ | █ | | |
| 16 Developing bias (M) | | █ | █ | | |
| 17 Developing bias (C) | | █ | █ | | |
| 18 Developing bias (K) | | █ | █ | | |
| 19 T1 bias (Y/M/C) | | █ | █ | | |
| 20 T1 bias (K) | | █ | █ | | |
| 21 T2 bias | | █ | █ | | |
| 22 | | | | | |
| 23 | | | | | |
| 24 | | | | | |

Diagrams: General circuit diagrams

Figure 2-79 General circuit diagram for the M652/M653/M681/M682 printer base (1 of 3)

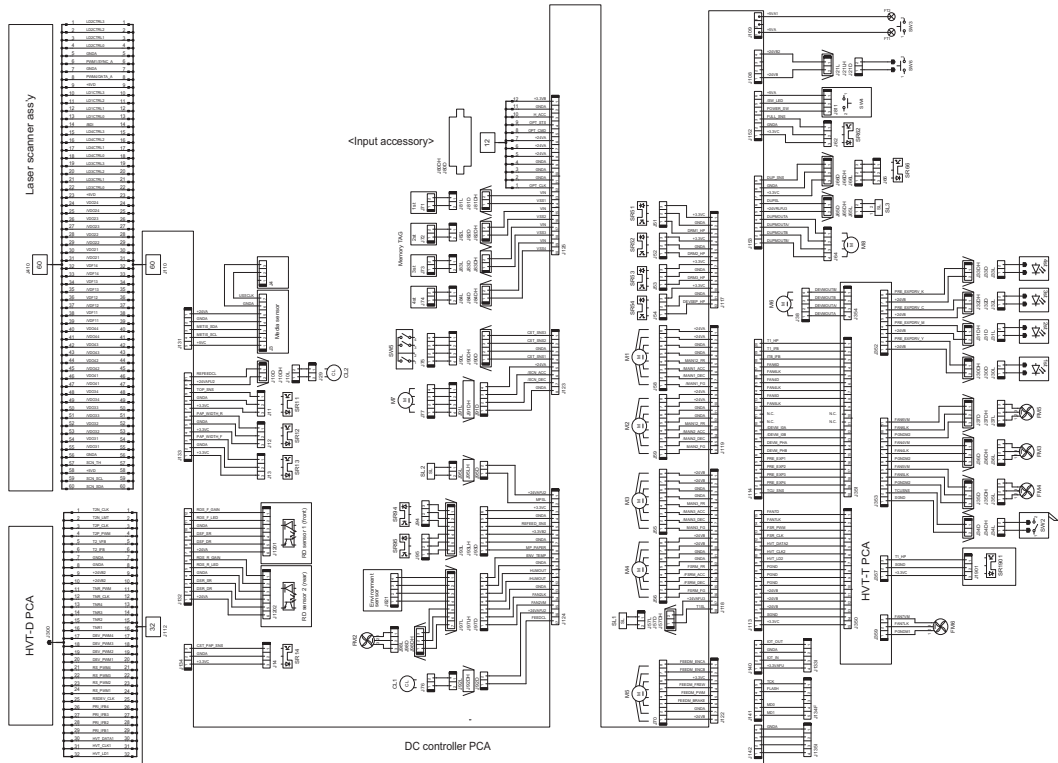


Figure 2-80 General circuit diagram for the M652/M653/M681/M682 printer base (2 of 3)


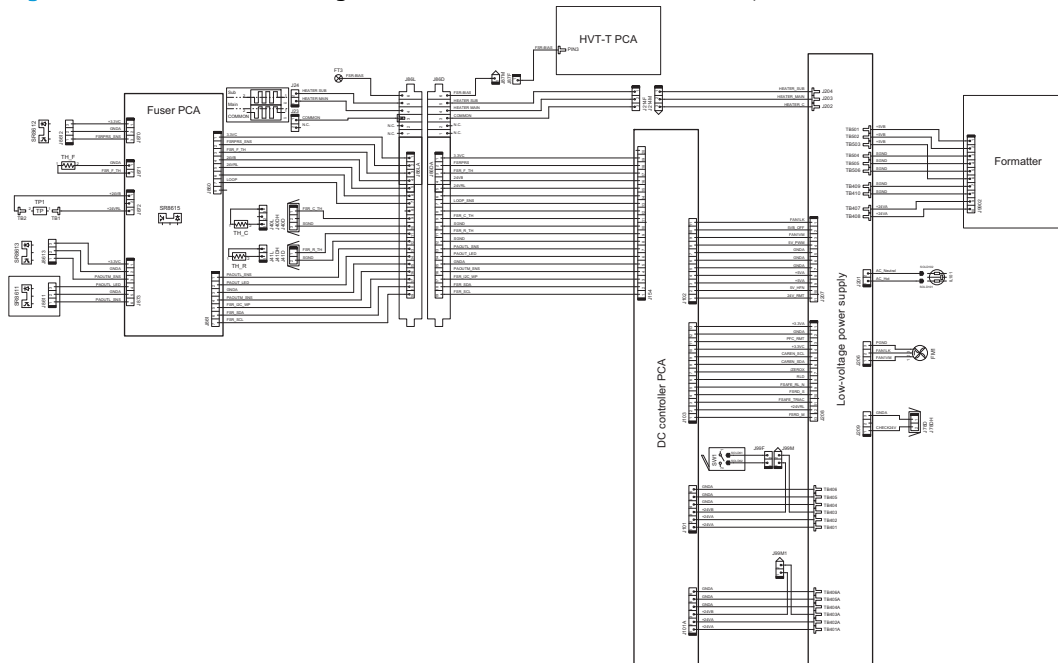


Figure 2-81 General circuit diagram for the M652/M653/M681/M682 printer base (3 of 3)

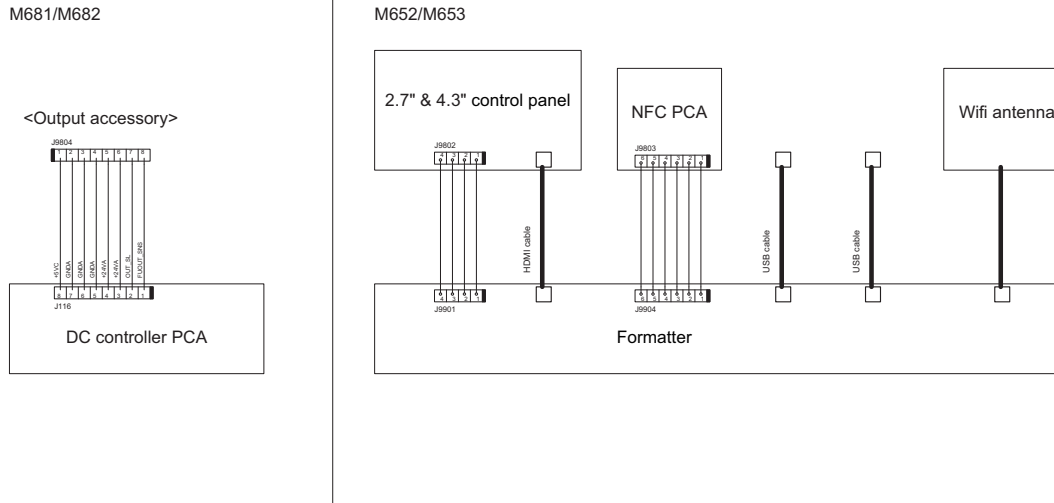

M652/M653/M681/M682

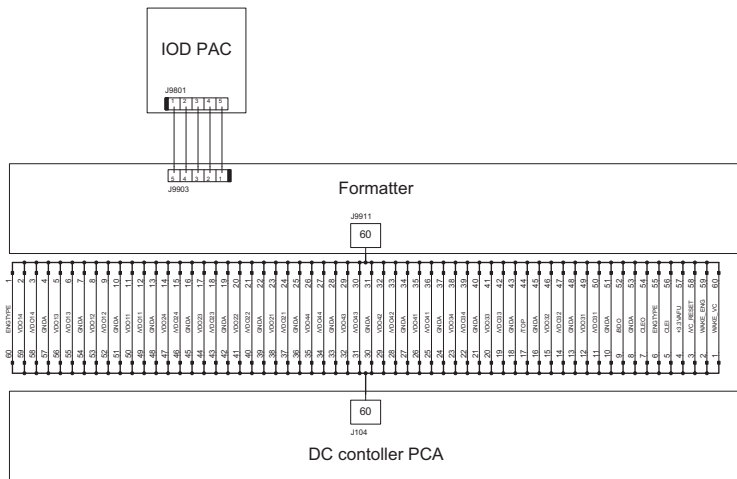


Figure 2-82 General circuit diagram for the E65150/E65160/E67650/E67660 printer base (1 of 4)

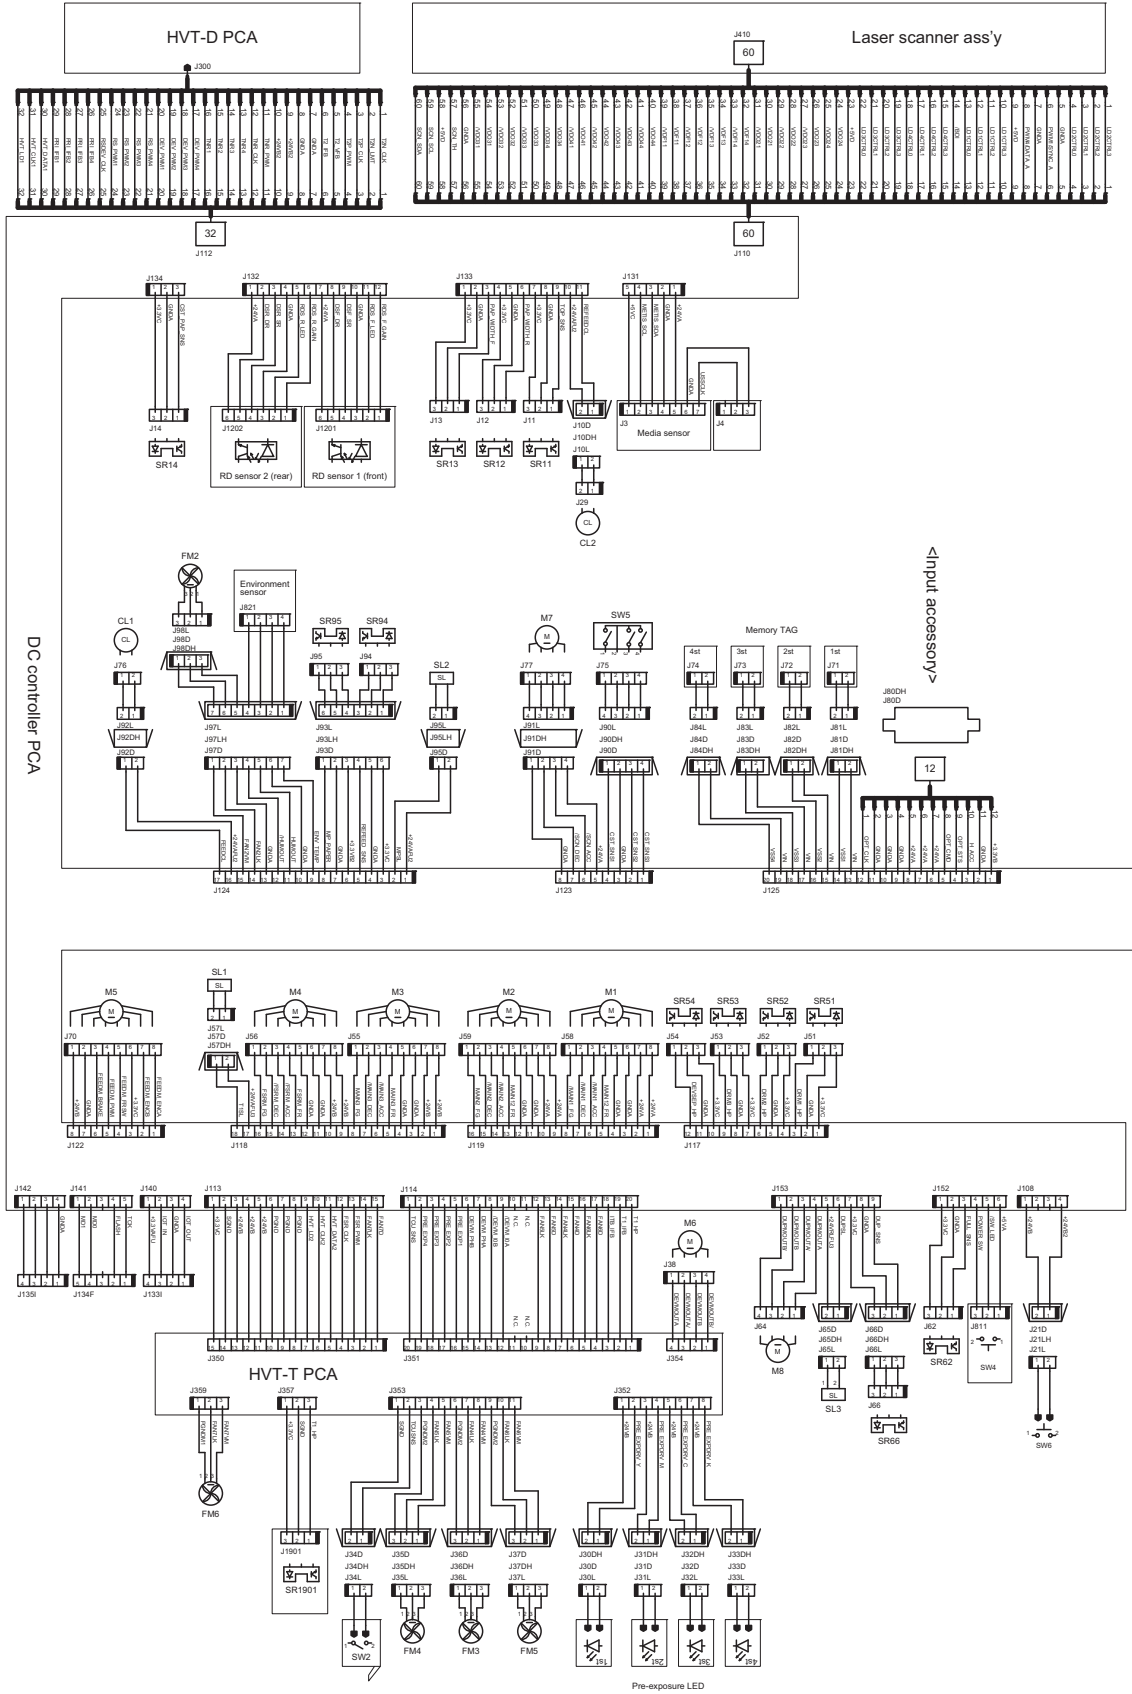


Figure 2-83 General circuit diagram for the E65150/E65160/E67650/E67660 printer base (2 of 4)

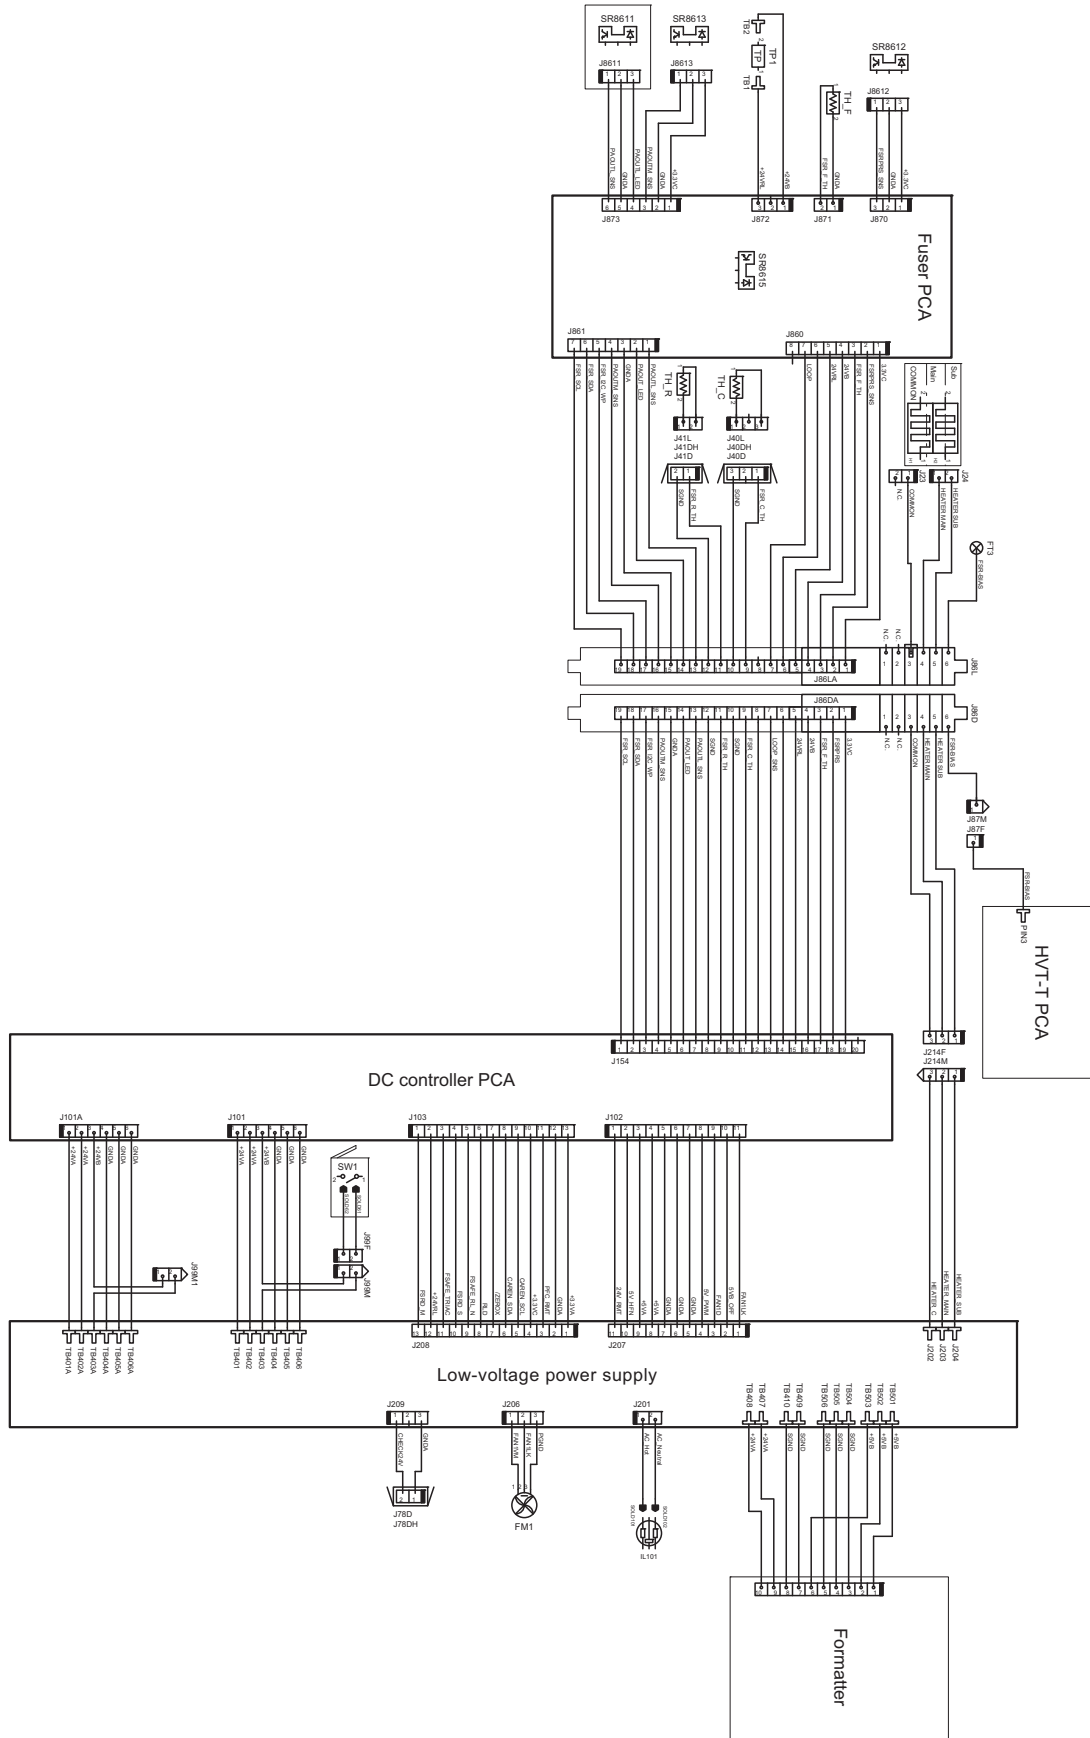


Figure 2-84 General circuit diagram for the E65150/E65160/E67650/E67660 printer base (3 of 4)



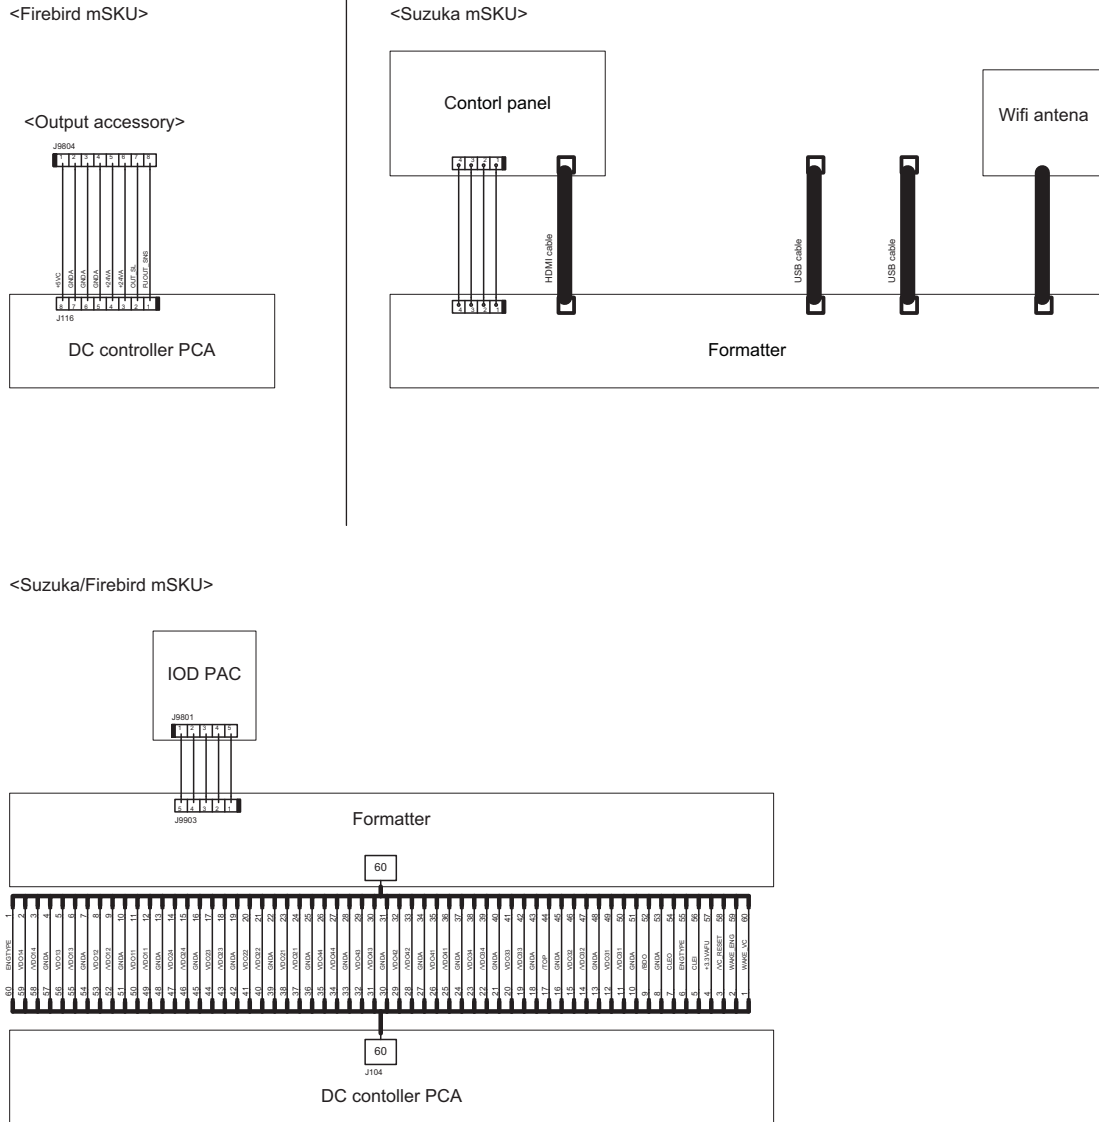


Figure 2-85 General circuit diagram for the E65150/E65160/E67650/E67660 printer base (4 of 4)
 <Firebird mSKU> <Suzuka mSKU>

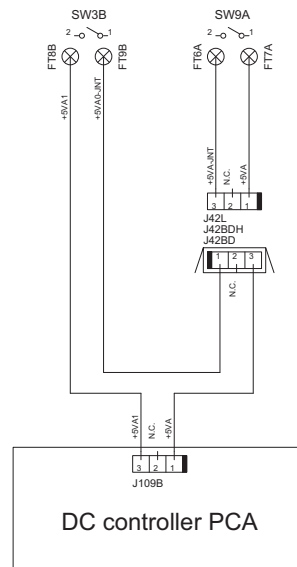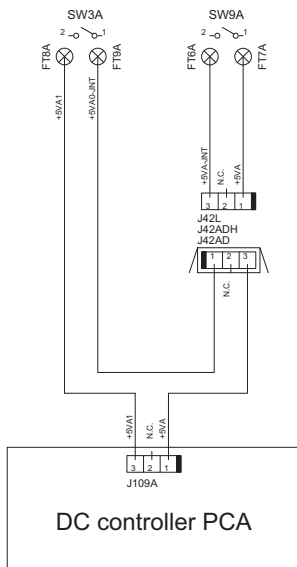

<Suzuka/Firebird mSKU>

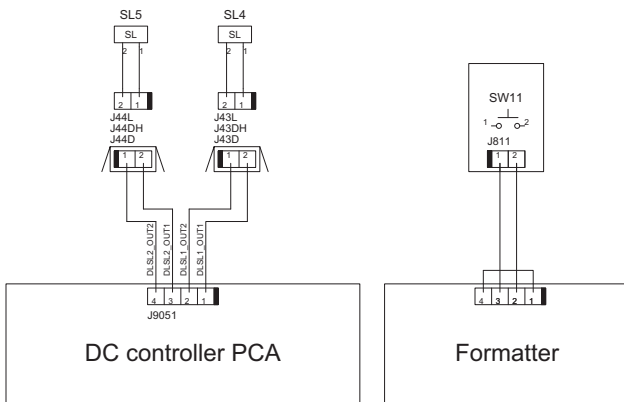


Figure 2-86 General circuit diagram for the 550-sheet feeder

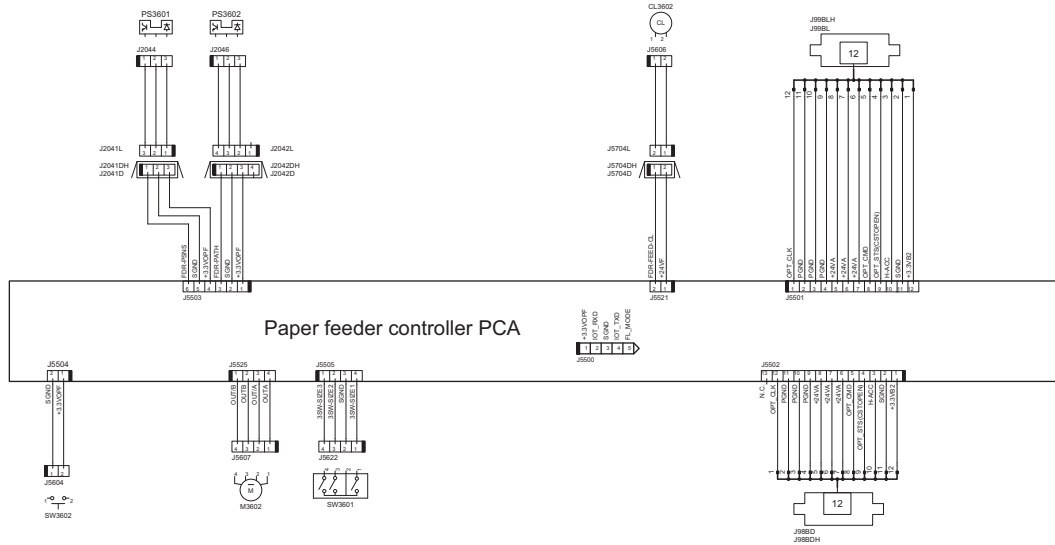


Figure 2-87 General circuit diagram for the 1x550-sheet and 3x550-sheet paper decks

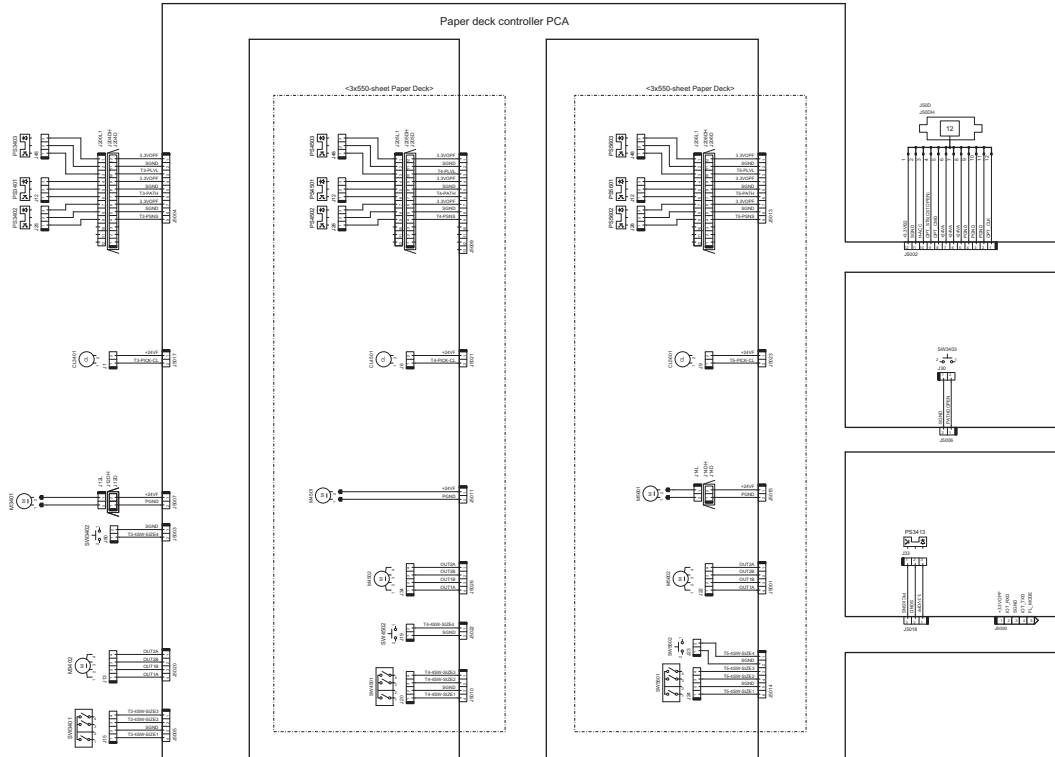


Figure 2-88 General circuit diagram for the 2,550-sheet paper deck


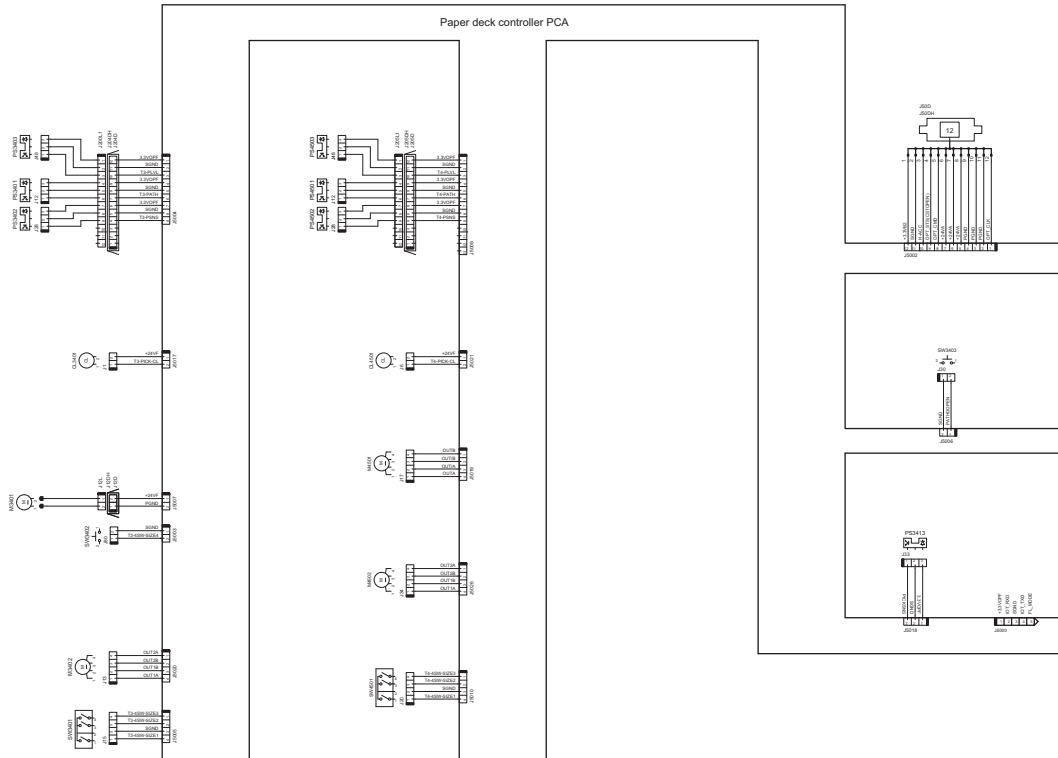


Figure 2-89 General circuit diagram for the stapling mailbox

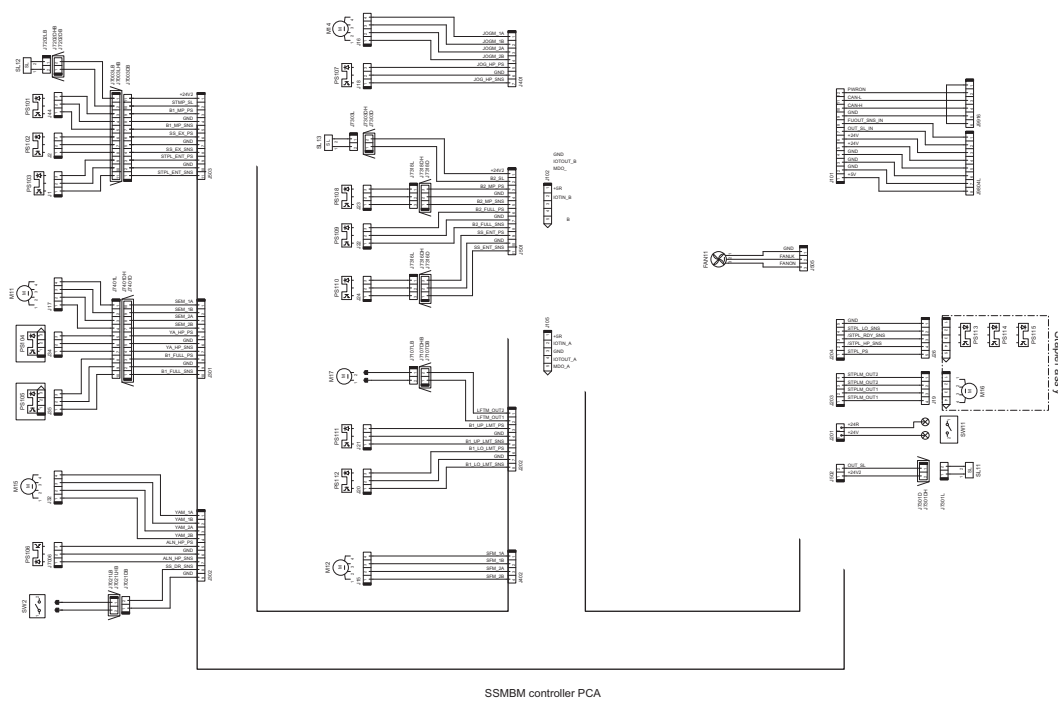

Internal test and information pages

Print the configuration page

Depending on the model, up to three pages print when you print a configuration page. In addition to the main configuration page, the fax accessory page (MFP fax models only), and the HP embedded Jetdirect configuration pages print.

Print a configuration page from a touchscreen control panel

Use the configuration page to view current printer settings, to help troubleshoot printer problems, or to verify installation of optional accessories, such as memory (DIMMs), paper trays, and printer languages.

1. From the Home screen on the printer control panel, select [Reports](#).
2. Select [Configuration/Status Pages](#).
3. Select [Configuration Page](#) to select it.
4. Select the [View](#) button (touchscreens only) to view the information on the control panel, or select [Print](#) to print the pages.

Print a configuration page from an LCD control panel

Use the configuration page to view current printer settings, to help troubleshoot printer problems, or to verify installation of optional accessories, such as memory (DIMMs), paper trays, and printer languages.

1. From the Home screen on the printer control panel, select [Reports](#).
2. Select [Configuration/Status Pages](#)
3. Select [Configuration Page](#) .
4. Select [Print](#), and then select [OK](#) to print the pages.

Figure 2-90 Configuration page

Configuration Page
HP Color LaserJet M652
Page 1

1 Device Information

Product Name: HP Color LaserJet M652
 Device Name: HP Color LaserJet M652
 Model Number: CXXXXA
 [[cControlVersion]]: 7.118
 [[cTrayVersion]]: 4.102
 Product Serial Number: XXXXXXXXXX
 [[cFormatterNumberColon]] XXXXXXXXXX
 Firmware Bundle Version: Beta
 Firmware Revision: 0466125_42240
 Firmware Datecode: 20160713
 HP FutureSmart Level: HP FutureSmart 4
 NFC Revision: [[cNotInstalled]]
 Service ID: 00050
 Fuser Kit Interval: 150000
 Pages Since Last Fuser Maintenance: 0
 [[cSTPSTInputColon]] 300
 [[cSTEngineCyclesColon]] 2
 Color Engine Cycles*: 0
 Cartridge Protection: Off
 Cartridge Policy: Off
 Cartridge Index: QFLP MAP
 *Not weighted for billing

2 Installed Personalities and Options

PCL: 20010402
 PCLXL: 20010402
 POSTSCRIPT: 20010402
 PDF: 20130901
 AirPrint: 2040201
 PAGESETER: 2040201
 TIFF: 20150522
 Internal Disk: Hard Disk: Enabled
 Serial Number: A1E045D0
 Model: Toshiba 036893
 Capacity: 7456 MB
 Hard Disk Encryption Status: Disk cannot be encrypted
 Embedded HP Jetdirect: NP457562
 Custom Color Table: [[cNotInstalled]]

3 HP Web Services

HP Web Services: Disabled
 ePrint: Disabled

4 Color Density

| | C | M | Y | K |
|------------|---|---|---|---|
| Highlights | 0 | 0 | 0 | 0 |
| Midtones | 0 | 0 | 0 | 0 |
| Shadows | 0 | 0 | 0 | 0 |

5 Calibration Information

Last CPR (Engine Cycles): 2
 Last CPR: 12/9/2016 4:22:15 AM
 Last (Max/Dhalf) (Engine Cycles): 2
 Last (Max/Dhalf): 12/9/2016 4:22:15 AM

6 Memory

Total RAM: 1536 MB

7 Event Log

Number of Entries in Use: 63
 Three Most Recent Entries:

| Number | Cycles | Event |
|--------|--------|----------|
| 63 | 2 | 42.30.01 |
| 62 | 2 | 42.30.01 |
| 61 | 0 | 33.02.02 |

8 Security

Hard Disk Encryption Status:
 Internal Disk: Disk cannot be encrypted
 Job Data Encryption Status: Encrypted (AES-128)
 Job Data Persistence: Volatile (not persistent)
 File Erase Mode: Non-Secure Fast Erase (no overwrite)
 Control Panel Password: Disabled
 Support Key: QALZ-UKX0-1WAC
 Host USB plug and play: Enabled
 Device USB: Enabled
 Whitelisting: Development

9 Paper Trays and Options

Default Paper Size: Letter
 Tray 1 Size: Any Size
 Tray 1 Type: Any Type
 Tray 2 Size: Letter
 Tray 2 Type: Plain
 Tray 3 Size: Legal
 Tray 3 Type: Plain
 Duplex Unit:
 1: Output Bin 1, 500 Sheets, Standard bin

12/14/2016 01:51:24

English (United States)

| | | | |
|---|---|---|--|
| 1 | Device Information, including the firmware version, usage statistics, and the service ID. | 6 | Memory |
| 2 | Installed Personalities and Options information, including installed printer languages and hard disk information. | 7 | Event Log information that shows the most recent entries in the log. |
| 3 | HP Web Services status information | 8 | Security information that includes encryption information and current security settings. |
| 4 | Calibration Information that shows when the printer most recently performed a calibration. | 9 | Paper Trays and Options information that shows installed trays and current paper size/type settings. |
| 5 | Color Density information | | |

HP embedded Jetdirect page

The third configuration page—this is the second page for non-fax models—is the HP embedded Jetdirect page, which contains the following information.

Always make sure the status line under the general information line indicates: **I/O Card Ready**.

Figure 2-91 HP embedded Jetdirect page

| | | | |
|---|--|---|---|
| 1 | General Information indicates the printer status, model number, hardware firmware version, port select, port configuration, auto negotiation, manufacturing identification, and manufactured date. | 4 | TCP/IP information, including the IP address |
| 2 | Security Settings information | 5 | IPv4 information |
| 3 | Network Statistics indicates the total packets received, unicast packets received, bad packets received, framing errors received, total packets transmitted, unsendable packets, transmit collisions, and transmit late collisions. | 6 | IPv6 information |

Finding important information on the configuration pages


Certain information, such as the firmware date codes, the IP address, and the email gateways, is especially helpful while servicing the printer. This information is on the various configuration pages.

Table 2-42 Important information on the configuration pages

| Type of information | Specific information | Configuration page |
|--|---|--|
| Firmware date codes When you use the remote firmware upgrade procedure, all of these firmware components are upgraded. | Engine firmware revision Firmware datecode HP embedded Jetdirect firmware version | Look on the main configuration page, under "Device Information." Look on the main configuration page, under "Device Information." Look on the HP embedded Jetdirect page, under "General Information." |
| Accessories and internal storage All optional devices that are installed on the printer should be listed on the main configuration page. In addition, separate pages print for the optional paper handling devices and the fax accessory. These pages list more detailed information for those devices. | Embedded HP Jetdirect Total RAM Duplex unit | Look on the main configuration page, under "Installed Personalities and Options." Shows model and ID. Look on the main configuration page, under "Memory." Look on the main configuration page, under "Paper Trays and Options." |
| Finishing accessories | Installed finishing accessory type | Look on the main configuration page, under "Paper Trays and Options." |
| Engine cycles and event logs Total page counts and maintenance kit counts are important for ongoing printer maintenance. The configuration page lists only the three most recent errors. To see a list of the 50 most recent errors, print an event log from the Troubleshooting menu. | Engine cycles | Look on the main configuration page, under "Device Information." |
| Event log information | Event log information | Look on the main configuration page, under "Event Log." |

Control panel menus

You can perform basic printer setup by using the control panel menus. Use the HP Embedded Web Server for more advanced printer setup. To open the HP Embedded Web Server, enter the printer IP address or host name in the address bar of a web browser.

 **NOTE:** Where applicable, the M681-M682 printer displays a [View](#) button.

- [Reports menu](#)
- [Settings menu](#)
- [Copy menu \(MFP only\)](#)
- [Scan menu \(MFP only\)](#)
- [Fax menu \(fax models only\)](#)
- [Print menu](#)
- [Supplies menu](#)
- [Trays menu](#)
- [Support Tools menu](#)

Reports menu

To display: At the printer control panel, select [Reports](#).

Table 2-43 Reports menu

| First level | Second level | Values | Description |
|----------------------------|-----------------------|--------|--|
| Configuration/Status Pages | Settings Menu Map | Print | Shows a map of the entire control panel system and the selected values for each setting. |
| | | View | |
| | Current Settings Page | Print | Shows a summary of the current settings for the printer. This might be helpful if you plan to make changes and need a record of the present configuration. |
| | | View | |
| | Configuration Page | Print | Shows the printer settings and installed accessories. |
| | | View | |
| | How to Connect Page | Print | Shows the network information typically needed to connect the printer to a network. |
| | | View | |

Table 2-43 Reports menu (continued)

| First level | Second level | Values | Description |
|---|--------------------------|---------------|---|
| Configuration/Status Pages (continued) | Supplies Status Page | Print View | Shows the approximate remaining life for the supplies; reports statistics on total number of pages and jobs processed, serial number, page counts, and maintenance information. HP provides approximations of the remaining life for the supplies as a customer convenience. The actual remaining supply levels might be different from the approximations provided. |
| | Usage Page | Print View | Shows a count of all paper sizes that have passed through the printer; lists whether they were simplex, duplex, monochrome, or color; and reports the page count. |
| | File Directory Page | Print View | Shows the file name and folder name for files that are stored in the printer memory. |
| | Web Services Status Page | Print View | Shows the detected Web Services for the printer. |
| | Color Usage Job Log | Print View | Shows color jobs completed by the printer. |
| Fax Reports (MFP fax models only) | Fax Activity Log | Print View | Contains a list of the faxes that have been sent from or received by this printer. |
| | Billing Codes Report | Print View | Provides a list of billing codes that have been used for outgoing faxes. This report shows how many sent faxes were billed to each code. |
| | Blocked Fax List | Print View | A list of phone numbers that are blocked from sending faxes to this printer. |
| | Speed Dial List | Print View | Shows the speed dials that have been set up for this printer. |
| | Fax Call Report | Print View | A detailed report of the last fax operation, either sent or received. |
| Other Pages | Demonstration Page | Print | Prints a demonstration page. |
| | RGB samples | Print | Prints color samples for different RGB values. Use the samples as a guide for matching printed colors. |
| | CMYK samples | Print | Prints color samples for different CMYK values. Use the samples as a guide for matching printed colors. |

Table 2-43 Reports menu (continued)

| First level | Second level | Values | Description |
|-------------|---------------|--------|---------------------------------|
| Other Pages | PCL Font List | Print | Prints the available PCL fonts. |
| (continued) | PS Font List | Print | Prints the available PS fonts. |

Settings menu

To display: At the printer control panel, select the [Settings](#) menu.

In the following table, asterisks (*) indicate the factory default setting.

Table 2-44 [Settings](#) menu

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description | | |
|-------------|--|------------------|----------------|--------------------------------------|---|---|---|--|
| General | Date/Time Settings | Date/Time Format | Date Format | | DD/MMM/YYYY | Use the Date/Time Settings menu to specify the date and time and to configure date/time settings. | | |
| | | | | | MMM/DD/YYYY | | | |
| | | | YYYY/MMM/DD | | | | | |
| | | | | Time Format | 12 hour (AM/PM) | Select the format that the printer uses to show the date and time, for example 12-hour format or 24-hour format. | | |
| | | | | 24 hours | | | | |
| | | | Date/Time | Date | | Select the time zone from a list. | Select the time zone, date, and time that the printer uses. | |
| | | | | | Time | | Select the date from a pop-up calendar. | |
| | | | | | Time Zone | | Select the time from a pop-up keypad. | |
| | | Energy Settings | Sleep Schedule | A list of scheduled events displays. | Select an event from the list to edit it. | | For the selected event, change the time and days settings as desired. | Use to configure the printer to automatically wake up or go to sleep at specific times on specific days. Using this feature saves energy. NOTE: You must configure the date and time settings before you can use this feature. |
| | | | | | | | Done | |
| | Select the trash can icon to delete the event. | | | | | | | |
| | | New event | Event Type | | Select whether to add or edit a Wake event or a Sleep event, and then select the time and the days for the wake or sleep event. | | | |
| | | | | Time | Set the wake or sleep event time parameters. | | | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|------------------------|--------------------------------|-------------------------------|---|-------------|---|--|
| General (continued) | Energy Settings (continued) | Sleep Schedule (continued) | New event (continued) | Event Days | Select days of the week from a list. | Set the wake or sleep event day parameters. |
| | | Sleep Settings | Sleep After Inactivity | | Range: 1 to 110 minutes | Set the number of minutes after which the printer enters Sleep or Auto Off mode. Touch the existing number to open the virtual keypad, and then increase or decrease the number of minutes. |
| | | | Auto Off After Sleep | | Default = 0 minutes | |
| | | | Select one of these items: | | | |
| | | | <ul style="list-style-type: none"> HP Auto Off/ Auto On (Wake on most events) Shut down (Wake on power button only) | | | |
| | Display Settings | Display Brightness | A sliding bar displays with the indicator set in the middle. Move the indicator with your finger to select the desired brightness and then select Done. | | | Use to specify the intensity of the LCD control panel display. |
| | | System Sound | | | On* Off | Use to specify whether you hear a sound when you touch the screen or press buttons on the control panel. |
| | Language Settings | Language | | | Select from a list of languages that the printer supports. | Use to select a different language for control panel messages and specify the default keyboard layout. When you select a new language, the keyboard layout automatically changes to match the factory default for the selected language. |
| | | Keyboard Layout | M681z/M682z only | | Each language has a default keyboard layout. To change it, select from a list of layouts. | Select the default keyboard layout that matches the language you want to use. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|------------------------|---------------------------------|---|--------------|-------------|---|--|
| General (continued) | Display Settings (continued) | Information Screen | | | Show connection information* | Use this menu item to display or hide connection information on the Home screen. |
| | | | | | Hide connection information | |
| | | Display Date and Time | | | Yes* | Select whether to display or hide the date and time on the control panel Home screen. |
| | | M681/M682/ E67550/E67560/ E67650/E67660 only | | | No | |
| | | Inactivity Timeout | | | Range: 10-300 seconds Default = 60 seconds | Specifies the amount of time that elapses between any activity on the control panel and when the printer resets to the default settings. When the timeout expires, the control panel display returns to the Home menu, and any user signed in to the printer is signed out. |
| | | Clearable Warnings | | | Display during job* Display until cleared | Use this feature to set the period that a clearable warning displays on the control panel. If the On setting is selected, clearable warnings appear until the Clearable Warnings button is pressed. If the Job setting is selected, clearable warnings stay on the display during the job that generated the warning and disappear from the display when the next job starts. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|------------------------|---------------------------------|--------------------|--------------|-------------|---|--|
| General (continued) | Display Settings (continued) | Continuable Events | | | Auto-continue (10 seconds)* Touch OK to continue | Use this option to configure the printer behavior when the printer encounters certain errors. If the Auto-continue (10 seconds) option is selected, the job will continue after 10 seconds. If the Touch OK to continue option is selected, the job will stop and require the user to touch the OK button before continuing. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|------------------------|---------------|-------------|--------------|-------------|-----------|---|
| General (continued) | Jam Recovery | | | | Auto* | <p>This printer provides a jam recovery feature that reprints jammed pages. Select one of the following options:</p> <p>Auto: The printer attempts to reprint jammed pages when sufficient memory is available. This is the default setting.</p> <p>Off: The printer does not attempt to reprint jammed pages. Because no memory is used to store the most recent pages, performance is optimal.</p> <p>NOTE: When using this option, if the printer runs out of paper and the job is being printed on both sides, some pages can be lost.</p> <p>On: The printer always reprints jammed pages. Additional memory is allocated to store the last few pages printed. This might cause a decrease in overall performance.</p> |
| | | | | | Off | |
| | | | | | On | |
| | Auto Recovery | | | | Enabled | <p>The printer attempts to reprint jammed pages when sufficient memory is available. This is the default setting.</p> |
| | | | | | Disabled* | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|------------------------|--------------------|-------------|--------------|-------------|--------------------|---|
| General (continued) | Enable AutoSend | | | | Disable* Enable | <p>Browse to the HP Embedded Web Server AutoSend configuration page for advanced set up and the HP online Privacy Statement Information.</p> <p>Use the Enable AutoSend menu to enable or disable the AutoSend feature. The AutoSend feature enables your product to periodically send product configuration information including serial number, event logs, page usage counts and supplies status information to HP web addresses (URLs), or email addresses. Information sent to HP is used to improve products and services, and to monitor the product if you have a relationship with HP that provides you services such as proactive cartridge replacement, pay-per-page contracts, support agreements, or usage tracking.</p> |
| | Hold Off Print Job | | | | On* Off | <p>Enable this feature if you want to prevent print jobs from starting while a user is initiating a copy job from the control panel. Held print jobs start printing after the copy job is finished, provided that no other copy job is in the print queue.</p> |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description | | | | | | |
|------------------------|--------------------------------|----------------|--------------|-------------|--------|---|---|--|--|--|--------------------|--|
| General (continued) | Reset Factory Settings | | | | Cancel | Touch Reset to reset current user-specified default settings to the factory default settings. | | | | | | |
| | | | | | Reset | | | | | | | |
| Copy/Print | Copy Settings | Image Preview | | | | Display a preview of the image before printing it. | | | | | | |
| | | | | | | | | | | | | |
| | Enable Device USB | | | | | Enabled | Enables the printer to open a file from a USB drive. | | | | | |
| | | | | | | Disabled* | | | | | | |
| | Manage Stored Jobs | Job Sort Order | | | | Job Name* | This option allows you list the jobs either alphabetically or chronologically. | | | | | |
| | | | | | | Date | | | | | | |
| | | | | | | Retain Temporary Jobs After Reboot | | | | | Do not retain | Sets which temporary jobs will be retained in the event of a printer reboot. |
| | | | | | | | | | | | Personal jobs only | |
| | All temporary jobs | | | | | | | | | | | |
| | Temporary Job Storage Limit | | | | | 1-300 | Configure global settings for jobs that are stored in the printer memory. | | | | | |
| | | | | | | Default = 32 | | | | | | |
| | Temporary Stored Job Retention | | | | | | The Temporary Job Storage Limit feature specifies the number of temporary jobs that can be stored on the printer. The maximum allowed value is 300. | | | | | |
| 30 minutes | | | | | | | Configure global settings for jobs that are stored in the printer memory. | | | | | |
| 1 hour | | | | | | | | | | | | |
| 4 hours | | | | | | | | | | | | |
| 1 day | | | | | | | | The Temporary Stored Job Retention feature specifies the number of temporary jobs that can be stored on the printer. The maximum allowed value is 300. | | | | |
| 1 week | | | | | | | | | | | | |
| 4 weeks | | | | | | | | | | | | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|-------------------------------|---------------------------------------|-------------------------------|--------------|--|------------|--|
| Copy/Print (continued) | Manage Stored Jobs (continued) | Standard Stored Job Retention | | | 30 minutes | Configure global settings for jobs that are stored in the printer memory. The Temporary Stored Job Retention feature specifies the number of standard jobs that can be stored on the printer. The maximum allowed value is 300. |
| | | | | | 1 hour | |
| | | | | | 4 hours | |
| | | | | | 1 day | |
| | | | | | 1 week | |
| | | | | 4 weeks | | |
| | Default Print Options | Number of Copies | | Range: 1-32000 Default = 1 | | Sets the default number of copies for a copy job. This default applies when the Copy function or the Quick Copy function is initiated from the printer Home screen. |
| | | Paper Selection | | Select from a list of sizes that the printer supports. | | Configures the default paper size used for print jobs. |
| | Default Custom Paper Size | X Dimension | | Range: 3-8.5 inches Default = 8.5 inches | | Configures the default paper size that is used when the user selects Custom as the paper size for a print job. |
| | | Y Dimension | | Range: 5-14 inches Default = 14 inches | | |
| | | Use Inches | | Enabled* Disabled | | |
| | | Output Sides | | 1-sided* 2-sided | | Use to indicate whether the original document is printed on one or both sides, and whether the copies should be printed on one or both sides. For example, select the 1-sided original, 2-sided output option when the original is printed on one side, but you want to make two-sided copies. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description | |
|---------------------------|--------------------------------------|--------------|--------------|-------------|-----------------------|--|--|
| Copy/Print (continued) | Default Print Options (continued) | Staple | | | None | Sets the position of the staple on the page. | |
| | | | | | Top left | | |
| | | | | | Top right | | |
| | | | | | Top left or right | | |
| | | | Output Bin | | | Automatically select | |
| | | | | | | Standard bin* | |
| | | | | | | Upper bin | |
| | | | | | | Middle bin | |
| | | | Resolution | | | FastRes1200 | Sets the resolution for sent documents. Higher resolution images have more dots per inch (dpi), so they show more detail. Lower resolution images have fewer dots per inch and show less detail, but the file size is smaller. Some file types, for example a file that will be processed with OCR, require a specific resolution. When these file types are selected, the Resolution setting might automatically change to a valid value. |
| | | | | | | 1200x1200dpi | |
| | | Edge-to-Edge | | | Normal (recommended)* | Use to avoid shadows that can appear along the edges of copies when the original document is printed close to the edges. | |
| | | | | | Edge-to-Edge output | | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description | | |
|---------------------------|--------------------------------|------------------|--------------|-------------|----------|--|---|---|
| Copy/Print (continued) | PCL and PostScript Settings | Courier Font | | | Regular* | Select which version of the Courier font you want to use. The factory default setting is Regular , which uses an average stroke width. The Dark setting can be used if a heavier Courier font is needed. | | |
| | | | | | Dark | | | |
| | | Wide A4 | | | | Enabled | Changes the printable area of A4-size paper. If you enable this option, eighty 10-pitch characters can be printed on a single line of A4 paper. | |
| | | | | | | Disabled* | | |
| | | Print PS Errors | | | | Enabled | Use this feature to select whether a PostScript (PS) error page is printed when the printer encounters a PS error. | |
| | | | | | | Disabled* | | |
| | | Print PDF Errors | | | | Enabled | Selects whether a PDF error page is printed when the printer encounters a PDF error. | |
| | | | | | | Disabled* | | |
| | | Personality | | | | | Auto* | Configures the default print language or personality for the printer. Normally you should not change the printer language. If you change the setting to a specific printer language, the printer does not automatically switch from one language to another unless specific software commands are sent to it. |
| | | | | | | | PCL | |
| PS | | | | | | | | |
| PDF | | | | | | | | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|---|-------------|---------------|-------------|---|--|
| Copy/Print (continued) | PCL and PostScript Settings (continued) | PCL | Font Settings | Font Source | Internal Disk resident | Selects the font source for the user-soft default font. The list of available options varies depending on the installed printer options. |
| | | | | Font Number | Range: 0-110 Default = 0 | Specifies the font number for the user-soft default font using the source that is specified in the Font Source menu. The printer assigns a number to each font and lists it on the PCL font list. The font number displays in the Font # column of the printout. |
| | | | | Font Pitch | Range: 0.44-99.99 Default = 10 | If the Font Source option and the Font Number setting indicate a contour font, then use this feature to select a default pitch (for a fixed-spaced font). |
| | | | PCL Settings | Form Length | Range: 5-128 Default = 60 | Controls the PCL print-command options. PCL is a set of printer commands that HP developed to provide access to printer features. Use the Form Length feature to select the user-soft default vertical form length. |
| | | | | Orientation | Portrait * Landscape | Select the orientation that is most often used for copy or scan originals. Select the Portrait option if the short edge is at the top or select the Landscape option if the long edge is at the top. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|--|--------------------|-----------------------------|----------------------|------------------------------------|---|
| Copy/Print (continued) | PCL and PostScript Settings (continued) | PCL (continued) | PCL Settings (continued) | Symbol Set | Select from a list of symbol sets. | Select any one of several available symbol sets from the control panel. A symbol set is a unique grouping of all the characters in a font. The factory default value for this option is PC-8. Either PC-8 or PC-850 are recommended for line-draw characters. |
| | | | | Append CR to LF | No* Yes | Configure whether a carriage return (CR) is appended to each line feed (LF) encountered in backwards-compatible PCL jobs (pure text, no job control). Select Yes to append the carriage return. The default setting is No. Some environments, such as UNIX, indicate a new line by using only the line-feed control code. This option allows the user to append the required carriage return to each line feed. |
| | | | | Suppress Blank Pages | No* Yes | This option is for users who are generating their own PCL, which could include extra form feeds that would cause blank pages to be printed. When the Yes option is selected, form feeds are ignored if the page is blank. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|--|--------------------|------------------------------------|--|----------------------|--|
| Copy/Print (continued) | PCL and PostScript Settings (continued) | PCL (continued) | PCL Settings (continued) | Media Source Mapping | Standard* Classic | Use to select and maintain input trays by number when you are not using the printer driver, or when the software program has no option for tray selection. The following options are available: Standard: Tray numbering is based on newer HP LaserJet models. Classic: Tray numbering is based on HP LaserJet 4 and older models. |
| | Print Quality | Adjust Color | Tonal Range | Highlights Midtones Shadows | | |
| | | | Cyan Magenta Yellow Black | | | |
| | | Image Registration | Tray | Tray 1 Tray 2 Tray 3 Tray 4 Tray 5 Depends upon number of trays installed | | Specify tray to be adjusted |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|------------------------------|-----------------------------------|--------------------------------|-------------|---------------------|---|
| Copy/Print (continued) | Print Quality (continued) | Image Registration (continued) | Front-side Horizontal Shift | | -5.00 mm to 5.00 mm | Shift the margin alignment to center the image on the page from top to bottom and from left to right. You can also align the image on the front with the image printed on the back. |
| | | | Front-side Vertical Shift | | | The direction that is perpendicular to the way the paper passes through the printer is referred to as X. This is also known as the scan direction. X1 is the scan direction for a single-sided page or for the second side of a two-sided page. X2 is the scan direction for the first side of a two-sided page. |
| | | | Back-side Horizontal Shift | | | The direction that the paper feeds through the printer is referred to as Y. Y1 is the feed direction for a single-sided page or for the second side of a two-sided page. Y2 is the feed direction for the first side of a two-sided page. |
| | | | Back-side Vertical Shift | | | Use the Adjust Tray <X> menu to adjust the registration settings for each tray. Before adjusting these values, print a registration test page. It provides alignment guides in the X and Y directions so you can determine which adjustments are necessary. You can adjust values for X1 Shift, X2 Shift, Y1 Shift, and Y2 Shift. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|------------------------------|-----------------------------------|-----------------|-----------------|---|---|
| Copy/Print (continued) | Print Quality (continued) | Image Registration (continued) | | Print Test Page | | Use the Print Test Page option to print a page to test the image registration. It provides alignment guides in the X and Y directions so you can determine which adjustments are necessary. |
| | | Auto Sense Behavior | Tray 1 | | Sense every page Sense first page Sense transparency only | |
| | | | All Other Trays | | Sense first page Sense transparency only | |
| | | Adjust paper types | | | Select from a list of paper types Reset Paper Types | |
| | | Optimize | | | Normal Paper Heavy paper Envelope control Tray 1 Background Background 1 Uniformity Control Tracking Control Registration Transfer Control Moisture Control Reset Optimize | |
| | | Edge Control | | | Off Light Normal* Maximum | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|--------------|----------------------|--------------|-------------|------------------------------------|--|
| Copy/Print (continued) | Manage Trays | Use Requested Tray | | | Exclusively* When available | <p>Controls how the printer handles jobs that have specified a specific input tray. Two options are available:</p> <p>Exclusively: The printer never selects a different tray when the user has indicated that a specific tray should be used, even if that tray is empty.</p> <p>When available: The printer pulls from another tray if the specified tray is empty, even though the specific tray was indicated for the job.</p> |
| | | Manually Feed Prompt | | | Always* Prompt on mismatch | <p>Indicate whether a prompt should appear when the type or size for a job does not match the specified tray and the printer pulls from the multipurpose tray instead. Two options are available:</p> <p>Always: A prompt always displays before using the multipurpose tray.</p> <p>Prompt on mismatch: A prompt displays only if the size or type do not match or the tray is empty</p> |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|-----------------------------|------------------|--------------|-------------|----------------------------|--|
| Copy/Print (continued) | Manage Trays (continued) | Size/Type Prompt | | | Display* Do not display | <p>Controls whether the tray configuration message displays whenever a tray is closed. Two options are available:</p> <p>Display: Shows the tray configuration message when a tray is closed. The user is able to configure the tray settings directly from this message.</p> <p>Do not display: Prevents the tray configuration message from automatically appearing.</p> |
| | | Use Another Tray | | | Allow* Do not allow | <p>Use to turn on or off the control panel prompt to select another tray when the specified tray is empty. Two options are available:</p> <p>Allow: When this option is selected the user is prompted to either add paper to the selected tray or to choose a different tray. This is the factory default.</p> <p>Do not allow: When this option is selected, the user is not given the option of selecting a different tray. The printer prompts the user to add paper to the tray that was initially selected.</p> |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|-----------------------------|-----------------------------|--------------|-------------|----------------------|--|
| Copy/Print (continued) | Manage Trays (continued) | Alternative Letterhead Mode | | | Disabled* Enabled | Use to load letterhead or preprinted paper into the tray the same way for all print jobs, whether you are printing to one side of the sheet or to both sides of the sheet. When this option is selected, load the paper as you would for printing on both sides. See the user documentation that came with the printer for instructions about loading letterhead for printing on both sides. When this option is selected, the printer speed slows to the speed required for printing on both sides. |
| | | Duplex Blank Pages | | | Automatic* Always | Controls how the printer handles two-sided jobs (duplexing). Two options are available: Automatic: Choose this option to skip printing blank sides during a two-sided print job. The printer can print jobs faster when blank sides are skipped. Always: Choose this option to print all sides of a two-sided job, even if one side is blank. This might be preferable for certain jobs that use paper types such as letterhead or prepunched paper. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|--|--|--------------|-------------|------------|--|
| Copy/Print (continued) | Manage Trays (continued) | Override A4/Letter | | | Yes* No | Prints on letter-size paper when an A4 job is sent but no A4-size paper is loaded in the printer (or to print on A4 paper when a letter-size job is sent but no letter-size paper is loaded). This option will also override A3 with ledger-size paper and ledger with A3-size paper. |
| Scan/Digital Send | E-mail Settings Network Folder Settings SharePoint Settings Scan to USB Drive Settings NOTE: The same options are available for each of these features, except where noted. | E-mail Setup NOTE: Email Settings only | | | | Use to configure settings that apply to sending documents through email or saving documents to a folder on the network or on a USB multi-drive. The E-mail Setup Wizard feature configures the printer to send scanned images as email attachments. To open the printer HP Embedded Web Server and set up the email notification server, enter the printer IP address into a Web browser. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|----------------------------------|--|---------------|--------------|-------------|--|--|
| Scan/Digital Send (continued) | E-mail Settings Network Folder Settings SharePoint Settings Scan to USB Drive Settings (continued) | Image Preview | | | Make optional* Require preview Disable preview | <p>Defines the default job options for each function. If you do not specify the job options when creating the job, the default options are used. For complete setup, go to the HP Embedded Web Server by typing the IP address of the printer into a Web browser.</p> <p>Use the Image Preview feature to scan a document and display a preview before completing the job. Select whether this feature is available on the printer.</p> <p>Make optional: The feature is optional, depending on the user who is signed in.</p> <p>Require preview Previews are required for all users.</p> <p>Disable preview: Previews are disabled for all users.</p> |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|----------------------------------|--------------------------------|---|--------------|-------------|--------------------------|--|
| Scan/Digital Send (continued) | Digital Sending Software Setup | Allow Use of a DSS Server Allow Transfer to New DSS server | | | Disabled Enabled* | <p>Configure how the printer interacts with the HP Digital Sending Software (DSS) server. HP DSS handles digital sending tasks, such as faxing, emailing, and sending scanned documents to a network folder or USB storage device.</p> <p>Use the Allow Use of a DSS Server and Allow Transfer to New DSS server options to configure the printer to use HP DSS.</p> |
| Fax | Internal Fax Modem Setup | | | | | <p>Use this wizard to set up options for faxing.</p> <ol style="list-style-type: none"> Select your location from the list. Fax communication standards vary |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|------------------------|-------------------|---------------|--------------|-------------|--|--|
| | | | | | | <p>according to location.</p> <ol style="list-style-type: none"> 2. Type your company name and fax number. This information is used in the fax header, which appears at the top of each page in the fax. 3. Verify that the date and time settings are correct. 4. If you need to use a dialing prefix, type the prefix number in the box. 5. Make sure that the printer is connected to a working phone line. |
| Fax (continued) | Fax Send Settings | Image Preview | | | <p>Make optional</p> <p>Require preview</p> <p>Disable preview</p> | <p>Use the Image Preview feature to control the image preview behavior.</p> <ul style="list-style-type: none"> • Make optional: Previews are optional for all users. • Require preview: Previews are required for all users. • Disable preview: Previews are disabled for all users. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description | |
|------------------------|--------------------------------------|----------------------|---------------------------|-------------------------|---|---|---|
| Fax (continued) | Fax Send Settings (continued) | Fax Dialing Settings | Redial on Error | | Range: 0-9 Default = 2 | These settings control how the fax modem dials the outgoing fax number when faxes are sent. | |
| | | | Redial on No Answer | | Range: 0-2 Default = 0 | | |
| | | | Redial on Busy | | Range: 0-9 Default = 3 | | |
| | | | Redial Interval | | Range: 1-5 Default = 5 | | |
| | | | Fax Send Speed | | Fast (v.34-33.6k) Medium (v.17-14.4k)* Slow (v.29-9.6k) | | |
| | | | General Fax Send Settings | Fax Number Confirmation | | Radio button to enable or disable | If this feature is enabled, you must enter the fax number twice. |
| | | | | PC Fax Send | | Radio button to enable or disable | Enables users who have the correct driver installed to send faxes through the printer from their computers. |
| | | | | Error Correction Mode | | Radio button to enable or disable | When error-correction mode is enabled and an error occurs during fax transmission, the printer sends or receives the error portion again. |
| | | | | Fax Header | | Prepend* Overlay | Use to prepend or overlay the fax header page. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|--------------------|----------------------------------|-----------------------|-----------------------------------|-------------|-------------------------------|--|
| Fax (continued) | Fax Send Settings (continued) | Billing Code Settings | Enable Billing Codes | | Checkbox to enable or disable | <p>When billing codes are enabled, a prompt displays that asks the user to enter the billing code for an outgoing fax. This prompt does not appear if the Allow users to edit billing codes check box is not checked.</p> <p>You can also use the billing codes report in the Reports menu to view the list of the billing codes that have been used for faxes that have been sent from the printer. The list is grouped by billing code and also shows fax details. This feature can be used for billing or usage tracking.</p> |
| | | | Default Billing Code | | | Specify a default billing code for faxing. If you specify a default billing code, this code displays in the Billing Code field when the user sends an outgoing fax. If this field is blank, no default billing code is provided for the user. |
| | | | Minimum Length | | Range: 1-16 Default = 1 | Specify the required length of the billing code. Billing codes can be between 1 and 16 characters long. |
| | | | Allow users to edit billing codes | | Checkbox to enable or disable | |
| | Fax Receive Settings | Fax Receive Setup | Rings To Answer | | Range: 1-6 Default = 1 | Use to configure settings for receiving faxes. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|--------------------|-------------------------------------|----------------------------------|--|--------------------|---|--|
| Fax (continued) | Fax Receive Settings (continued) | Fax Receive Setup (continued) | Ringer Volume | | Off Low* High | |
| | | | Fax Receive Speed | | Fast (v.34-33.6k) Medium (v.17-14.4k)* Slow (v.29-9.6k) | Select Medium (v. 17-14.4k) or Slow (v.29-9.6k) to improve the quality of received faxes. |
| | | Fax Printing Schedule | | | Always store Always print* Use schedule | If you have concerns about the security of private faxes, use this feature to store faxes rather than having them automatically print. Open the Fax Printing Schedule sub-menu, and then you can choose to always store faxes, always print them, or you can set up a schedule for each day of the week. |
| | | | Schedule | New Event | Begin Printing | If you are using a fax printing schedule, use this menu to configure when to print faxes. |
| | | | Touch this to set up a fax printing schedule if you selected the Use Fax Printing Schedule option. | Done | Begin Storing | |
| | | | | Delete (trash can) | Time Event Days | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|--------------------|-------------------------------------|---------------------|----------------|-------------|--------|---|
| Fax (continued) | Fax Receive Settings (continued) | Blocked Fax Numbers | New Fax Number | | | <p>The blocked fax list can contain up to 30 numbers. When the printer receives a call from one of the blocked fax numbers, it deletes the incoming fax. It also logs the blocked fax in the activity log along with job-accounting information.</p> <p>Add blocked numbers: Enter a fax number into the New Fax Number field, and then touch the arrow button to add a new number to the blocked fax list.</p> <p>To remove blocked numbers: Select a number and touch the trash can icon button to delete it from the blocked fax list.</p> <p>To clear all blocked numbers: Touch the Select All button to select all of the numbers from the blocked fax list, and then touch the trash can icon to delete the numbers.</p> <p>You also can use the Blocked Fax List report in the Information menu to view the list of the fax numbers that have been blocked on this printer.</p> |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|------------------------|--|---------------------|----------------------|-------------|-----------------------------|---|
| Fax (continued) | Fax Receive Settings (continued) | Default Job Options | Notification | | Do not notify* | Configure to receive notification about the status of a sent document. |
| | | | | | Notify when job completes | |
| | | | | | Notify only if job fails | Do not notify: Turns off this feature. Notify when job completes: Select to receive notification for this job only. Notify only if job fails: Select to receive notification only if the job is not sent successfully. |
| | | | | | Print | E-mail: Select to receive the notification in an email. Touch the text box following Email Address, and then enter the email address for the notification. |
| | | | | | E-mail* | |
| | | | | | Include Thumbnail | NOTE: When sending an analog fax, select Include Thumbnail to receive a thumbnail image of the first page of the fax in your notification. |
| | | | | | Notification E-mail address | Touch this text field, provide the email address to which you want notifications sent, and then touch the OK button. |
| | | | Stamp Received Faxes | | On | Use this option to add the date, time, sender's phone number, and page number to each page of the faxes that this printer receives. |
| | | | | | Off* | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description | | | | |
|--------------------|-------------------------------------|------------------------------------|--------------|----------------------------|-----------------------|---|----------------------------------|---|---|--|
| Fax (continued) | Fax Receive Settings (continued) | Default Job Options (continued) | Fit to Page | | On* | Use to shrink faxes that are larger than Letter-size or A4-size so that they can fit onto a Letter-size or A4-size page. If this feature set to Disabled, faxes larger than Letter or A4 will flow across multiple pages. | | | | |
| | | | | | Off | | | | | |
| | | | | Paper Tray | Automatic* | | Select from a list of the trays. | | | |
| | | | | Output Bin | Automatically select | | Standard bin | | | |
| | | | | | Upper bin | | Middle bin | | | |
| | | | | Out Sides | 1-sided* | | 2-sided | Use to describe the layout for each side of the original document. First select whether the original document is printed on one side or both sides. | | |
| | | | | Fax Forwarding | Enable Fax Forwarding | | Disabled* | Enabled | Use to forward received faxes to another fax machine. | |
| | | | | Type of Fax Job to Forward | | | All faxes | Sent faxes | Received faxes | Use to select the type of fax jobs that you want forwarded. |
| | | | | Fax Forwarding Number | | | | | | Provide the forwarding phone number, and then touch the OK button. |
| | | | | Clear Fax Activity Log | | | | | | Clears all events from the fax activity log. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description | |
|-----------------|------------------------|-------------------------------|------------------|-------------------|--------------|--|---|
| Manage Supplies | Low Warning Thresholds | | | Black Cartridge | 1-100% | Set the estimated percentage at which the printer notifies you when a toner cartridge is very low. | |
| | | | | Cyan Cartridge | Default = 5% | | |
| | | | | Magenta Cartridge | | | |
| | | | | Yellow Cartridge | | | |
| | | Low Warning Threshold Message | | | | On | Displays a message on the control panel when a cartridge is very low. |
| | | | | | | Off | |
| | | Very Low Behavior | Black Cartridge | | | Stop | |
| | | | Color Cartridges | | | Continue | |
| | | | Transfer Kit | | | Prompt to continue | |
| | | | Fuser Kit | | | | |
| | Document Feeder Kit | | | | | | |
| | | Staples | | | Stop | | |
| | | | | | Continue | | |
| | Restrict Color Use | | | | Enable | Use this feature to enable, restrict, or disable color printing or copying. | |
| | | | | Disable Color | | | |
| | | | | Color if allowed* | | | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|--------------------------------|-----------------|-------------|--------------|-------------|--|---|
| Manage Supplies (continued) | Color/Black Mix | | | | Auto Mostly Color Pages Mostly Black Pages | <p>Instructs the printer when to switch between color and monochrome printing modes for the best overall performance.</p> <p>Auto: Uses the mode that is appropriate for the first page of the job. If necessary, the printer switches modes during the middle of a job and then stays in that mode until the job is finished.</p> <p>Mostly Color Pages: The printer uses color mode for all jobs, even if the job contains no color pages.</p> <p>Mostly Black Pages: The printer uses monochrome mode until it detects a color page. The printer switches back to monochrome mode when it detects a sequence of several monochrome pages.</p> |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|--------------------------------|------------------|----------------------|-----------------------|-------------|---|---|
| Manage Supplies (continued) | Store Usage Data | | | | On supplies | The Store Usage Data provides a way to suppress the toner cartridges from storing most of the information gathered exclusively for the purpose of understanding the usage of the printer. Select the On supplies setting to store the data on the toner cartridge memory chip. Select the Not on supplies setting to suppress the information from being stored on the memory chip. |
| | | | | | Not on supplies | |
| | | Cartridge Protection | | | Off* Protect Cartridges | |
| | Cartridge Policy | | | | Off* Authorized HP | Set Authorized HP to allow only genuine HP cartridges to be used in this product. |
| Manage Stapler/ Stacker | Operation Mode | | | | Mailbox Stacker Function Separator* | |
| | | Job Offset | | | | On Off |
| Networking | Ethernet | Information | Print Security Report | | Yes No* | Yes : Prints a page that contains the current security settings on the HP Jetdirect print server. No : A security settings page is not printed. |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|-------------------------|-------------|---------------|---------------|---|--|
| Networking (continued) | Ethernet (continued) | TCP/IP | Host Name | | Use the arrow buttons to edit the host name. NPIXXXXXX* | An alphanumeric string, up to 32 characters, used to identify the printer. This name is listed on the HP Jetdirect configuration page. The default host name is NPIxxxxxx, where xxxxxx is the last six digits of the LAN hardware (MAC) address. |
| | | | IPv4 Settings | Config Method | Bootp DHCP* Auto IP Manual | <p>Specifies the method that TCP/IPv4 parameters will be configured on the HP Jetdirect print server.</p> <p>Bootp (Bootstrap Protocol): Use for automatic configuration from a BootP server.</p> <p>DHCP (Dynamic Host Configuration Protocol): Use for automatic configuration from a DHCPv4 server. If selected and a DHCP lease exists, the DHCP Release menu and the DHCP Renew menu are available to set DHCP lease options.</p> <p>Auto IP: Use for automatic link-local IPv4 addressing. An address in the form 169.254.x.x is assigned automatically.</p> <p>If you set this option to the Manual setting, use the Manual Settings menu to configure TCP/IPv4 parameters.</p> |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description | |
|-------------|--------------|-------------|---------------|---------------|---------------|---|--|
| Networking | Ethernet | TCP/IP | IPV4 Settings | Default IP | Auto IP* | Specify the IP address to default to when the print server is unable to obtain an IP address from the network during a forced TCP/IP reconfiguration (for example, when manually configured to use BootP or DHCP). | |
| (continued) | (continued) | (continued) | (continued) | | Legacy | | |
| | | | | | | <p>NOTE: This feature assigns a static IP address that might interfere with a managed network.</p> <p>Auto IP: A link-local IP address 169.254.x.x is set.</p> <p>Legacy: The address 192.0.0.192 is set, consistent with older HP Jetdirect printers.</p> | |
| | | | | | DHCP Release | Yes | |
| | | | | | | No* | |
| | | | | | DHCP Renew | Yes | |
| | | | | | | No* | |
| | | | | | Primary DNS | Range: 0-255 Default = xxx.xxx.xx.xx | Specify the IP address (n.n.n.n) of a Primary Domain Name System (DNS) Server. |
| | | | | | Secondary DNS | Range: 0-255 Default = 0.0.0.0 | Specify the IP address (n.n.n.n) of a Secondary DNS Server. |
| | | | | IPV6 Settings | Enable | Off | Use this item to enable or disable IPv6 operation on the print server. |
| | | | | | | On* | |
| | | | | | | <p>Off: IPv6 is disabled.</p> <p>On: IPv6 is enabled.</p> | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|-------------|--------------|-------------|---------------|---------------|--------------------------------|--|
| Networking | Ethernet | TCP/IP | IPV6 Settings | Address | Manual Settings | Use this item to enable and manually configure a TCP/IPv6 address. |
| (continued) | (continued) | (continued) | (continued) | | Enable | |
| | | | | | Address | |
| | | | | DHCPv6 Policy | Router Specified | <p>Router Specified: The stateful auto-configuration method to be used by the print server is determined by a router. The router specifies whether the print server obtains its address, its configuration information, or both from a DHCPv6 server.</p> <p>Router Unavailable: If a router is not available, the print server should attempt to obtain its stateful configuration from a DHCPv6 server.</p> <p>Always: Whether a router is available, the print server always attempts to obtain its stateful configuration from a DHCPv6 server.</p> |
| | | | | | Router Unavailable* | |
| | | | | | Always | |
| | | | | Primary DNS | Range: 0-255 | Specify the IP address (n.n.n.n) of a Primary Domain Name System (DNS) Server. |
| | | | | | Default = xxx.xxx.xx.xx | |
| | | | | Secondary DNS | Range: 0-255 | Specify the IP address (n.n.n.n) of a Secondary DNS Server. |
| | | | | | Default = 0.0.0.0 | |

Table 2-44 Settings menu (continued)

| First level | Second level | Third level | Fourth level | Fifth level | Values | Description |
|---------------------------|-------------------------|-----------------------|--------------|-------------|---|---|
| Networking (continued) | Ethernet (continued) | TCP/IP (continued) | Proxy Server | | Select from a provided list. | <p>Specifies the proxy server to be used by embedded applications in the printer. A proxy server is typically used by network clients for Internet access. It caches Web pages, and provides a degree of Internet security for those clients.</p> <p>To specify a proxy server, enter its IPv4 address or fully-qualified domain name. The name can be up to 255 octets.</p> <p>For some networks, you might need to contact your Internet Service Provider (ISP) for the proxy server address.</p> |
| | | | Proxy Port | | Range: 1-65535 Default = 0080 | <p>Enter the port number used by the proxy server for client support. The port number identifies the port reserved for proxy activity on your network, and can be a value from 0 to 65535.</p> |
| | | | Idle Timeout | | Range: 0-3600 Default = 0270 | <p>The time period, in seconds, after which an idle TCP print data connection is closed (default is 270 seconds, 0 disables the timeout).</p> |

Copy menu (MFP only)

To display: At the printer control panel, select the [Copy](#) menu.

In the following table, asterisks (*) indicate the factory default setting.

Table 2-45 Copy menu (MFP only)

| First level | Second level | Third level | Values | Description | |
|-------------------------|----------------|----------------|-----------------------|---|---|
| Sides | Original Sides | | 1-sided* | Use to indicate whether the original document is printed on one or both sides. | |
| | | | 2-sided | | |
| | Output Sides | | 1-sided* | Use to indicate whether the copies should be printed on one or both sides. | |
| | | | 2-sided | | |
| Color/Black | | | Automatically detect* | Select how the copy should be printed. | |
| | | | Color | Automatically detect: Prints color documents in color, and black and white documents in black and white. For mixed documents, the printer will determine whether to print in color or black and white. | |
| | | | Black/Gray | Color: Prints documents in color. Black: Prints documents in black and white or grayscale. | |
| Quick Sets and Defaults | | | Load | | |
| | | | Save | | |
| Options | Sides | Original Sides | 1-sided* | | |
| | | | 2-sided | | |
| | Output Sides | | 1-sided* | | |
| | | | 2-sided | | |
| | Color/Black | | | Automatically detect* | Select how the copy should be printed. |
| | | | | Color | Automatically detect: Prints color documents in color, and black and white documents in black and white. For mixed documents, the printer will determine whether to print in color or black and white. |
| | | | Black/Gray | Color: Prints documents in color. Black: Prints documents in black and white or grayscale. | |

Table 2-45 Copy menu (MFP only) (continued)

| First level | Second level | Third level | Values | Description |
|----------------------------|-----------------|----------------|--|---|
| Options (continued) | Staple | | None* | Sets the position of the staple on the page. |
| | | | Top left angled | |
| | | | Top right angled | |
| | Scan mode | | Standard Document* | Book Mode allows the user to scan pages from a book. |
| | | | Book Mode | |
| | | | 2-sided ID | 2-sided ID allows the user to scan both sides of an identification card onto one sheet. |
| | Reduce/Enlarge | | Automatic* | Use to scale the size of the document up or down. Select one of the predefined percentages, or select the Scaling field and type a percentage between 25 and 400. The Auto option automatically scales the image to fit the paper size in the tray. |
| | | | Manual | |
| | | | | NOTE: To reduce the image, select a scaling percentage that is less than 100. To enlarge the image, select a scaling percentage that is greater than 100. |
| | Original Size | | Select from a list of sizes that the printer supports. | Describes the page size of the original document. |
| | Paper Selection | | Paper Size | For the best color and image quality, select the appropriate paper type from the control panel menu or from the print driver. |
| | | | Paper Type | |
| | | | Paper Tray | |
| | Booklet | Booklet Format | (Checkbox) | Use to copy two or more pages onto one sheet of paper so you can fold the sheets in the center to form a booklet. The printer arranges the pages in the correct order. For example, if the original document has eight pages, the printer prints pages 1 and 8 on the same sheet. |

Table 2-45 Copy menu (MFP only) (continued)

| First level | Second level | Third level | Values | Description |
|----------------------------|---------------------|-------------|------------------------------------|--|
| Options (continued) | Content Orientation | | Auto Detect | For some features to work correctly, you must specify the way the content of the original document is placed on the page. Portrait orientation means the short edge of the page is along the top. Landscape orientation means the long edge of the page is along the top. In the Orientation area, select whether the original document has a portrait or landscape orientation. |
| | | | Portrait* | |
| | | | Landscape | |
| | Pages per Sheet | | One (1)* | Copies multiple pages onto one sheet of paper. NOTE: Before using this screen, use the Content Orientation screen to describe the original document orientation. |
| | | | Two (2) | |
| | | | Four (4) | |
| | Image Adjustment | Sharpness | | Adjust the Sharpness setting to clarify or soften the image. For example, increasing the sharpness could make text appear crisper, but decreasing it could make photographs appear smoother. |
| | | | | Use to improve the overall quality of the copy. Adjust the Darkness setting to increase or decrease the amount of white and black in the colors. |
| | | | | Darkness |
| | | | | Contrast |
| | | | Background Cleanup | Adjust the Background Cleanup setting if you are having trouble copying a faint image. |

Table 2-45 Copy menu (MFP only) (continued)

| First level | Second level | Third level | Values | Description |
|----------------------------|-----------------------|-------------|-------------------------------|---|
| Options (continued) | Optimize Text/Picture | | Text | Optimizes the output for a particular type of content. |
| | | | Mixed* | You can optimize the output for text, printed pictures, or a mixture. |
| | | | Printed picture | |
| | | | Photograph | <p>Text: Use to optimize the text portion of the copy where text and/or pictures are on the original.</p> <p>Mixed: Use for documents that contain a mix of text and graphics.</p> <p>Printed picture: Use for line drawings and preprinted images, such as magazine clippings or pages from books.</p> <p>Photograph: Best suited for making copies of printed pictures.</p> |
| | Edge-to-Edge | | Normal (recommended)* | Use to avoid shadows that can appear along the edges of copies when the original document is printed close to the edges. |
| | | | Edge-to-Edge output | |
| | Erase Edges | Front Side | Apply same width to all edges | Use this menu item to remove blemishes, such as dark borders or staple marks, by cleaning the specified edges of the scanned image. In each of the text boxes enter the measurements, in millimeters or inches, for how much of the top edge, bottom edge, left edge, and right edge to clean. |
| | | | Top edge | |
| | | | Bottom edge | |
| | | | Left edge | |
| | | | Right edge | |
| | | Back Side | Use inches | |
| | | | Mirror front side | |
| | | | Top edge | |
| | | | Bottom edge | |
| | | | Left edge | |
| | | | Right edge | |

Table 2-45 Copy menu (MFP only) (continued)

| First level | Second level | Third level | Values | Description |
|----------------------------|----------------------|-------------|----------------------------------|---|
| Options (continued) | Collate | | Collate on (Sets in page order)* | If you are making more than one copy, select the Collate on (Sets in page order) option to assemble the pages in the correct order in each set of copies. Select the Collate off (Pages grouped) option to group the same pages together. For example, if you are making five copies of an original document that has two pages, all five first pages would be grouped together and all five second pages would be grouped together. |
| | | | Collate off (Pages grouped) | |
| | Multi-feed Detection | | On* Off | This setting stops the scanning process if it detects multiple-page feeds through the document feeder. |

Scan menu (MFP only)

To display: At the printer control panel, select the [Scan](#) menu.

In the following table, asterisks (*) indicate the factory default setting.

Table 2-46 Scan menu (MFP)

| First level | Second level | Third level | Fourth level | Values | Description |
|------------------------|-------------------------|--------------------------|--------------|---------------------|---|
| Scan to Email | | | | | |
| Scan to Network Folder | Folder Paths | | | | |
| | File Name | | | | |
| | Quick Sets and Defaults | | | | |
| | Options | File Type and Resolution | | | |
| | | Original sides | | 1-sided* 2-sided | Use to describe the layout for each side of the original document. First select whether the original document is printed on one side or both sides. Then touch the Orientation setting to indicate whether the original has portrait or landscape orientation. If it is printed on both sides, also select the 2-sided format that matches the original document. |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|------------------------|--------------|---------------------|--------------|--|--|
| Scan to Network Folder | Options | Color/Black | | Automatically detect color or black* | Use to enable or disable color scanning. |
| (continued) | (continued) | | | Automatically detect color or gray | Automatically detect color or black: When pages without color are detected, the printer creates an image of the page in 1-bit black if other settings allow. If the other settings don't allow (File Type, for example), the image is in grayscale. |
| | | | | Color | |
| | | | | Black/Gray | |
| | | | | Black | |
| | | | | | Automatically detect color or gray: When pages without color are detected, the printer creates an image of the page in grayscale. Select this option for the best image quality for non-color pages. |
| | | | | | Color: Scans documents in color. |
| | | | | | Black/Gray: Scans documents in grayscale. |
| | | | | | Black: Scans documents in black and white with a compressed file size. |
| | | Original Size | | Select from a list of supported sizes. | Use to describe the page size of the original document. |
| | | Content Orientation | Orientation | Automatically Detect | |
| | | | | Portrait* | |
| | | | | Landscape | |
| | | | | | For some features to work correctly, you must specify the way the content of the original document is placed on the page. Portrait orientation means the short edge of the page is along the top. Landscape orientation means the long edge of the page is along the top. In the Orientation area, select whether the original document has a portrait or landscape orientation. |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|---|----------------------------|-----------------------|--------------------|--|---|
| Scan to Network Folder (continued) | Options (continued) | Image Adjustment | Darkness | | Use to improve the overall quality of the copy. Adjust the Darkness setting to increase or decrease the amount of white and black in the colors. |
| | | | Contrast | | Adjust the Contrast setting to increase or decrease the difference between the lightest and darkest color on the page. |
| | | | Background Cleanup | | Adjust the Background Cleanup setting if you are having trouble copying a faint image. |
| | | | Sharpness | | Adjust the Sharpness setting to clarify or soften the image. For example, increasing the sharpness could make text appear crisper, but decreasing it could make photographs appear smoother. |
| | | | Automatic Tone | | The printer automatically adjusts the Darkness , Contrast , and Background Cleanup settings to the most appropriate for the scanned document. |
| | | Optimize Text/Picture | | Text Mixed Printed picture Photograph | <p>Text: Use for documents that contain mostly text. This option is also best suited for scanning documents with highlighter marks.</p> <p>Mixed: Use for documents that contain a mix of text and graphics</p> <p>Printed picture: Use for line drawings and preprinted images, such as magazines clippings or pages from books.</p> <p>Photograph: Use for photographic prints.</p> |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|---|----------------------------|--------------------------|-----------------|---|--|
| Scan to Network Folder (continued) | Options (continued) | Erase Edges | | Apply same width to all edges (checkbox to enable or disable) | Use this menu item to remove blemishes, such as dark borders or staple marks, by cleaning the specified edges of the scanned image. In each of the text boxes enter the measurements, in millimeters or inches, for how much of the top edge, bottom edge, left edge, and right edge to clean. |
| | | | | Top Edge | |
| | Bottom Edge | | | | |
| | Left Edge | | | | |
| | Right Edge | | | | |
| | | Cropping Options | | Do not crop | Use this menu item to automatically crop the scan for digital sending. Use the Crop to content option to scan the smallest possible area that has detectable content. |
| | | | Crop to content | | |
| | | | Crop to paper | | |
| | | Automatically Straighten | | Off* Automatically Straighten on | Enable this feature prior to scanning to automatically straighten the scanned image when pages are skewed during scanning. |
| | | Blank Page Suppression | | Off* Suppress blank pages | Use to prevent blank pages in the original document from being included in the output document. |
| | | Multi-feed Detection | | On* Off | This setting stops the scanning process if it detects multiple-page feeds through the document feeder. |
| | | Create Multiple Files | | Disabled Enabled | Enable this item to scan pages into separate files based on a specified page limit. A page is one side of an original document. JPEG and TIFF have a limit of one page per file. |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|---|----------------------------|--------------|--------------|---------------------------|---|
| Scan to Network Folder (continued) | Options (continued) | Notification | | Do not notify | Configure to receive notification about the status of a sent document. |
| | | | | Notify when job completes | |
| | | | | Notify only if job fails | Do not notify: Turns off this feature. |
| | | | | Print | Notify when job completes: Select to receive notification for this job only. |
| | | | | E-mail | Notify only if job fails: Select to receive notification only if the job is not sent successfully. |
| | | | | | Print: Select to print the notification at this printer. |
| | | | | | E-mail: Select to receive the notification to an email account. |
| | | | | Include Thumbnail | Select Include Thumbnail to receive a thumbnail image of the first page of the job in your notification. |
| | | | | Notification Email | E-mail: Select to receive the notification in an email. Touch the text box following Email Address , and then type the email address for the notification. |
| Scan to USB Drive | Destination | | | | |
| | Job Name | | | | |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|--------------------------------------|--------------|--------------------------|---|---|---|
| Scan to USB Drive (continued) | Options | File Type and Resolution | PDF PDF/A (Archivable) Searchable PDF (OCR) Searchable PDF/A (OCR) JPEG TIFF MTIFF XPS Text (OCR) Unicode Text (OCR) | NOTE: Not all of the following options are available for all file types. Resolution Quality and File Size High Compression (smaller file) PDF Encryption OCR Language Color/Grayscale TIFF/MTIFF Compression Black TIFF/MTIFF Compression | NOTE: Not all of the following options are available for all file types. Resolution: Choose from a list of resolution settings. Quality and File Size: Choose from High (large file), Medium* , or Low (small file). High Compression (smaller file): Checkbox to enable or disable. PDF Encryption: Checkbox to enable or disable. Password is required if enabled. OCR Language: Choose from a list of languages. Color/Grayscale TIFF/MTIFF Compression: Choose from LZW , TIFF 6.0 , and TIFF (Post 6.0) Black TIFF/MTIFF Compression: Choose from Automatic , G3 , G4 , and LZW |
| | | Original sides | | 1-sided* 2-sided | Use to describe the layout for each side of the original document. First select whether the original document is printed on one side or both sides. Then touch the Orientation setting to indicate whether the original has portrait or landscape orientation. If it is printed on both sides, also select the 2-sided format that matches the original document. |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|----------------------------------|------------------------|---------------------|--------------|--|--|
| Scan to USB Drive (continued) | Options (continued) | Color/Black | | Automatically detect color or black* Automatically detect color or gray Color Black/Gray Black | Use to enable or disable color scanning. Automatically detect color or black: When pages without color are detected, the printer creates an image of the page in 1-bit black if other settings allow. If the other settings don't allow (File Type, for example), the image is in grayscale. Automatically detect color or gray: When pages without color are detected, the printer creates an image of the page in grayscale. Select this option for the best image quality for non-color pages. Color: Scans documents in color. Black/Gray: Scans documents in grayscale. Black: Scans documents in black and white with a compressed file size. |
| | | Original Size | | Select from a list of supported sizes. | Use to describe the page size of the original document. |
| | | Content Orientation | | Automatically detect Portrait* Landscape | For some features to work correctly, you must specify the way the content of the original document is placed on the page. Portrait orientation means the short edge of the page is along the top. Landscape orientation means the long edge of the page is along the top. In the Orientation area, select whether the original document has a portrait or landscape orientation. |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|----------------------------------|------------------------|------------------|--------------------|--------|--|
| Scan to USB Drive (continued) | Options (continued) | Image Adjustment | Darkness | | Use to improve the overall quality of the copy. Adjust the Darkness setting to increase or decrease the amount of white and black in the colors. |
| | | | Contrast | | Adjust the Contrast setting to increase or decrease the difference between the lightest and darkest color on the page. |
| | | | Background Cleanup | | Adjust the Background Cleanup setting if you are having trouble copying a faint image. |
| | | | Sharpness | | Adjust the Sharpness setting to clarify or soften the image. For example, increasing the sharpness could make text appear crisper, but decreasing it could make photographs appear smoother. |
| | | | Automatic Tone | | The printer automatically adjusts the Darkness , Contrast , and Background Cleanup settings to the most appropriate for the scanned document. |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|----------------------------------|------------------------|--------------------------|--------------|---|--|
| Scan to USB Drive (continued) | Options (continued) | Optimize Text/Picture | | Text Mixed Printed picture Photograph | <p>Optimizes the output for a particular type of content. You can optimize the output for text, printed pictures, or a mixture.</p> <p>Text: Use to optimize the text portion of the copy when text and/or pictures are on the original.</p> <p>Mixed: Use for documents that contain a mix of text and graphics.</p> <p>Printed picture: Use for line drawings and preprinted images, such as magazine clippings or pages from books.</p> <p>Photograph: Best suited for making copies of printed pictures.</p> |
| | | Erase Edges | | Apply same width to all edges Top Edge Bottom Edge Left Edge Right Edge | Use this menu item to remove blemishes, such as dark borders or staple marks, by cleaning the specified edges of the scanned image. In each of the text boxes enter the measurements, in millimeters or inches, for how much of the top edge, bottom edge, left edge, and right edge to clean. |
| | | Cropping Options | | Do not crop Crop to content Crop to paper | Use this menu item to automatically crop the scan for digital sending. Use the Crop to content option to scan the smallest possible area that has detectable content. |
| | | Automatically Straighten | | Off* Automatically Straighten on | Enable this feature prior to scanning to automatically straighten the scanned image when pages are skewed during scanning. |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|----------------------------------|------------------------|---------------------------|-------------------|---|--|
| Scan to USB Drive (continued) | Options (continued) | Blank Page Suppression | | Off* Supress blank pages | Use to prevent blank pages in the original document from being included in the output document. |
| | | Multi-feed Detection | | On* Off | This setting stops the scanning process if it detects multiple-page feeds through the document feeder. |
| | | Create Multiple Files | | Disabled Enabled | Enable this item to scan pages into separate files based on a specified page limit. A page is one side of an original document. JPEG and TIFF have a limit of one page per file. |
| | | Notification | | Do not notify Notify when job completes Notify only if job fails Print E-mail | Configure to receive notification about the status of a sent document. Do not notify: Turns off this feature. Notify when job completes: Select to receive notification for this job only. Notify only if job fails: Select to receive notification only if the job is not sent successfully. Print: Select to print the notification at this printer. E-mail: Select to receive the notification to an email account. |
| | | | Include Thumbnail | | Select Include Thumbnail to receive a thumbnail image of the first page of the job in your notification. |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|----------------------------------|------------------------|-----------------------------|--------------------|---|--|
| Scan to USB Drive (continued) | Options (continued) | Notification (continued) | Notification Email | | E-mail: Select to receive the notification in an email. Touch the text box following Email Address , and then type the email address for the notification. |
| Scan to Job Storage | | | | Folder Job Name | |
| Scan to SharePoint® | Quick Sets | | | Select from a list of quick sets. | <p>NOTE: To use this menu, you must first enable Scan to SharePoint® from the printer's Embedded Web Server (EWS) and then set up at least one Quick Set. Log in as Administrator on the EWS and select the Scan/Digital Send tab to find these options.</p> <p>Use Scan to SharePoint® to scan a document and save it to a SharePoint® site.</p> <p>To specify a SharePoint® path, touch Load, and then select a Quick Set.</p> |
| Filename | | | | | |
| Options | | File Type and Resolution | | | |
| | | Original sides | 1-sided* | Use to describe the layout for each side of the original document. First select whether the original document is printed on one side or both sides. Then touch the Orientation setting to indicate whether the original has portrait or landscape orientation. If it is printed on both sides, also select the 2-sided format that matches the original document. | |
| | | | 2-sided | | |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|------------------------------------|------------------------|---------------------|--------------|---|---|
| Scan to SharePoint® (continued) | Options (continued) | Color/Black | | Automatically detect color or black Automatically detect color or gray Color Black/Gray Black | Use to enable or disable color scanning. Automatically detect color or black: When pages without color are detected, the printer creates an image of the page in 1-bit black if other settings allow. If the other settings don't allow (File Type, for example), the image is in grayscale. Automatically detect color or gray: When pages without color are detected, the printer creates an image of the page in grayscale. Select this option for the best image quality for non-color pages. Color: Scans documents in color. Black/Gray: Scans documents in grayscale. Black: Scans documents in black and white with a compressed file size. |
| | | Original Size | | Select from a list of supported sizes. | Use to describe the page size of the original document. |
| | | Content Orientation | Orientation | Automatically Detect Portrait* Landscape | For some features to work correctly, you must specify the way the content of the original document is placed on the page. Portrait orientation means the short edge of the page is along the top. Landscape orientation means the long edge of the page is along the top. In the Orientation area, select whether the original document has a portrait or landscape orientation. |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|------------------------------------|------------------------|-----------------------|--------------------|--|--|
| Scan to SharePoint® (continued) | Options (continued) | Image Adjustment | Darkness | | Use to improve the overall quality of the copy. Adjust the Darkness setting to increase or decrease the amount of white and black in the colors. |
| | | | Contrast | | Adjust the Contrast setting to increase or decrease the difference between the lightest and darkest color on the page. |
| | | | Background Cleanup | | Adjust the Background Cleanup setting if you are having trouble copying a faint image |
| | | | Sharpness | | Adjust the Sharpness setting to clarify or soften the image. For example, increasing the sharpness could make text appear crisper, but decreasing it could make photographs appear smoother. |
| | | | Automatic Tone | | The printer automatically adjusts the Darkness , Contrast , and Background Cleanup settings to the most appropriate for the scanned document. |
| | | Optimize Text/Picture | | Text Mixed Printed picture Photograph | <p>Text: Use for documents that contain mostly text. This option is also best suited for scanning documents with highlighter marks.</p> <p>Mixed: Use for documents that contain a mix of text and graphics.</p> <p>Printed picture: Use for line drawings and preprinted images, such as magazines clippings or pages from books.</p> <p>Photograph: Use for photographic prints.</p> |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|------------------------------------|------------------------|--------------------------|--------------|---|--|
| Scan to SharePoint® (continued) | Options (continued) | Erase Edges | | Apply same width to all edges (checkbox to enable or disable) Top Edge Bottom Edge Left Edge Right Edge | Use this menu item to remove blemishes, such as dark borders or staple marks, by cleaning the specified edges of the scanned image. In each of the text boxes enter the measurements, in millimeters or inches, for how much of the top edge, bottom edge, left edge, and right edge to clean. |
| | | Cropping Options | | Do not crop Crop to content Crop to paper | Use this menu item to automatically crop the scan for digital sending. Use the Crop to content option to scan the smallest possible area that has detectable content. |
| | | Automatically Straighten | | Off* Automatically Straighten on | Enable this feature prior to scanning to automatically straighten the scanned image when pages are skewed during scanning. |
| | | Blank Page Suppression | | Off* Suppress blank pages | Use to prevent blank pages in the original document from being included in the output document. |
| | | Multi-feed Detection | | On* Off | This setting stops the scanning process if it detects multiple-page feeds through the document feeder. |
| | | Create Multiple Files | | Disabled* Enabled | Enable this item to scan pages into separate files based on a specified page limit. A page is one side of an original document. JPEG and TIFF have a limit of one page per file. |

Table 2-46 Scan menu (MFP) (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|------------------------------------|------------------------|--------------|--------------------|---|---|
| Scan to SharePoint® (continued) | Options (continued) | Notification | | Do not notify Notify when job completes Notify only if job fails Print E-mail | <p>Configure to receive notification about the status of a sent document</p> <p>Do not notify: Turns off this feature.</p> <p>Notify when job completes: Select to receive notification for this job only.</p> <p>Notify only if job fails: Select to receive notification only if the job is not sent successfully.</p> <p>Print: Select to print the notification at this printer</p> <p>E-mail: Select to receive the notification to an email account.</p> |
| | | | Include Thumbnail | | Select Include Thumbnail to receive a thumbnail image of the first page of the job in your notification. |
| | | | Notification Email | | E-mail: Select to receive the notification in an email. Touch the text box following Email Address , and then type the email address for the notification. |

Fax menu (fax models only)

To display: At the printer control panel, select the [Fax](#) menu.

In the following table, asterisks (*) indicate the factory default setting.

Table 2-47 Fax menu (fax models only)

| First level | Second level | Third level | Values | Description |
|-------------------------|---------------------|-------------|---|---|
| Dialing Prefix | | | | |
| Fax Recipients | | | | |
| Quick Sets and Defaults | | | | |
| Options | Original Sides | | 1-sided* | Use to describe the layout for each side of the original document. First select whether the original document is printed on one side or both sides. Then touch the Orientation setting to indicate whether the original has portrait or landscape orientation. If it is printed on both sides, also select the 2-sided format that matches the original document. |
| | | | 2-sided | |
| | | Resolution | Standard (100 x 200dpi)* Fine (200 x 200dpi) Superfine (300 x 300dpi) | |
| | Original Size | | Select from a list of sizes that the printer supports. | Use to describe the page size of the original document. |
| | Content Orientation | Orientation | Portrait* Landscape | For some features to work correctly, you must specify the way the content of the original document is placed on the page. Portrait : This setting means the short edge of the page is along the top. Landscape : This setting means the long edge of the page is along the top. |

Table 2-47 Fax menu (fax models only) (continued)

| First level | Second level | Third level | Values | Description |
|----------------------------|-----------------------|--------------------|--|--|
| Options (continued) | Image Adjustment | Darkness | | Use to improve the overall quality of the copy. Adjust the Darkness setting to increase or decrease the amount of white and black in the colors. |
| | | Contrast | | Adjust the Contrast setting to increase or decrease the difference between the lightest and darkest color on the page. |
| | | Background Cleanup | | Adjust the Background Cleanup setting if you are having trouble copying a faint image. |
| | | Sharpness | | Adjust the Sharpness setting to clarify or soften the image. For example, increasing the sharpness could make text appear crisper, but decreasing it could make photographs appear smoother. |
| | | Automatic Tone | | The printer automatically adjusts the Darkness , Contrast , and Background Cleanup settings to the most appropriate for the scanned document. |
| | Optimize Text/Picture | | Text Mixed Printed picture Photograph | Optimizes the output for a particular type of content. You can optimize the output for text, printed pictures, or a mixture. Text: Use to optimize the text portion of the copy where text and/or pictures are on the original. Mixed: Use for documents that contain a mix of text and graphics. Printed picture: Use for line drawings and preprinted images, such as magazine clippings or pages from books. Photograph: Best suited for making copies of printed pictures. |

Table 2-47 Fax menu (fax models only) (continued)

| First level | Second level | Third level | Values | Description |
|----------------------------|-----------------------------|-------------------|--|---|
| Options (continued) | Blank Page Suppression | | Off* | Prevents blank pages in the original document from being included in the output document. |
| | | | On | |
| | Multi-feed Detection | | On* | Use this feature to prevent multiple pages being fed through the document feeder during document scans. |
| | | | Off | |
| | Notification | | Do not notify* | Use to receive notification about the status of a sent document. Do not notify: Turns off this feature. Notify when job completes: Select to receive notification for this job only. Notify only if job fails: Select to receive notification only if the job is not sent successfully. |
| | | | Notify when job completes | |
| | | | Notify only if job fails | |
| | | | Print | Print: Select to print the notification at this printer. |
| | | | E-mail | E-mail: Select to receive the notification in an email. Touch the text box following Email Address , and then enter the email address for the notification. |
| | | Include Thumbnail | | When sending an analog fax, select Include Thumbnail to receive a thumbnail image of the first page of the fax in your notification. |
| | Notification E-mail address | | Provide the email address that will receive notifications. | |

Print menu

To display: At the printer control panel, select the [Print](#) menu.

In the following table, asterisks (*) indicate the factory default setting.

Table 2-48 Print Options menu

| First level | Second level | Values | Description |
|--|-------------------------------------|------------------------------------|------------------------------------|
| Print from Job Storage | Stored Job to Print | Untitled Stored Faxes | Print a job stored on the printer. |
| Print from USB Drive | Stored Job to Print | Choose file to print on USB drive. | Print a job stored on a USB drive. |
| Fax Polling | Fax Polling Number | | |

Supplies menu

To display: At the printer control panel, select the [Supplies](#) menu.

In the following table, asterisks (*) indicate the factory default setting.

Table 2-49 Supplies menu

| First level | Values | Description |
|-----------------------|-----------------------------|-------------|
| Supplies Summary | | |
| Black Cartridge | Status | |
| Cyan Cartridge | Order HP Part | |
| Magenta Cartridge | Pages Printed | |
| Yellow Cartridge | Approximate Pages Remaining | |
| Toner Collection Unit | Status | |
| Transfer Kit | Order HP Part | |
| Fuser Kit | | |
| Document Feeder Kit | | |
| Stapler 1 | | |

Trays menu

To display: At the printer control panel, select the [Trays](#) menu.

In the following table, asterisks (*) indicate the factory default setting.

Table 2-50 Trays menu

| First level | Second level | Values | Description |
|-------------|--------------|---|-------------------------------------|
| Tray 1 | Size | Select paper size from a list of supported sizes. | Choose the paper size for the tray |
| Tray 2-x | Type | Select paper type from a list of supported types. | Choose the paper type for the tray. |

Support Tools menu

Maintenance menu



NOTE: Where applicable, only the touchscreen printers display a [View](#) button.

Backup/Restore menu

To display: At the printer control panel, select the [Support Tools](#) menu, select the [Maintenance](#) menu, and then select the [Backup/Restore](#) menu.

In the following table, asterisks (*) indicate the factory default setting.

Table 2-51 Backup/Restore menu

| First level | Second level | Third level | Values | Description |
|--------------|--------------|-------------|---|---------------------------------------|
| Back up Data | Back up Data | | Back up Now Cancel | Initiate a backup. |
| Restore Data | | | Insert a USB flash drive that contains the backup file in to the USB port near the control panel. | Restore data from an external source. |

Calibration/Cleaning menu

To display: At the printer control panel, select the [Maintenance](#) menu, and then select the [Calibrate/Cleaning](#) menu.

In the following table, asterisks (*) indicate the factory default setting.

Table 2-52 Calibrate/Cleaning menu

| First level | Second level | Values | Description |
|--|--------------|-----------------------------|---|
| Cleaning Page | | Automatic Cleaning Interval | <p>Use this menu to configure the settings for the product to automatically print a cleaning page.</p> <p>Select Off to disable automatic cleaning.</p> <p>Select a cleaning interval to set the number of pages to be printed before an automatic cleaning page is printed.</p> <p>Touch Print to manually print a cleaning page.</p> <p>NOTE: Cleaning pages print on the default paper size configured for the printer.</p> |
| | | Off* | |
| | | 1000 pages | |
| | | 2000 pages | |
| | | 5000 pages | |
| | | 10000 pages | |
| Quick Calibration | | Start | <p>The product automatically calibrates itself at various times. However, you can calibrate the product immediately if you see problems with print quality. Use this feature to perform a partial calibration. Use this calibration if color density or tone seems incorrect.</p> <p>Before calibrating the product, make sure that the Ready indicator displays on the control panel display. If a job is in progress, the calibration occurs when that job is complete.</p> |
| Full Calibration | | Start | <p>The product automatically calibrates itself at various times. However, you can calibrate the product immediately if you see problems with print quality. Use this feature to perform a full calibration, which can take up to three minutes. Use this calibration if the color layers seem to be shifted on the page.</p> <p>Before calibrating the product, make sure that the Ready indicator displays on the control panel display. If a job is in progress, the calibration occurs when that job is complete.</p> |
| Power On Calibration | | No delay | <p>This feature controls the timing of calibration when the printer wakes up or is turned on.</p> |
| | | Delay 15 minutes | |
| Calibrate Scanner (M681/M682/E67550/E67560/E67650/E67660 only) | | | <p>Touch Start to calibrate the device scanner. Messages on the control panel display will lead you through the calibration process.</p> |

Table 2-52 Calibrate/Cleaning menu (continued)

| First level | Second level | Values | Description |
|--|------------------------|---|--|
| Prepare for Shipping | | | Touch Start to initiate a cleaning sequence that helps prepare the product for shipping. Excess toner will be transferred into the Toner Collection Unit to keep loose toner contained during shipping. This process takes about 2 minutes. |
| Reset Calibration | | Reset Cancel | <p>Use this feature to return the product to the factory-set default values for color calibration.</p> <p>Select Reset to reset the color calibration. The printer will restart with the factory-set defaults.</p> <p>Select Cancel to close the menu without resetting the color calibration.</p> |
| Clean Document Feeder Settings | Low Threshold Settings | Range: 0-100% Default = 10% | Configure cleaning settings for the document feeder. |
| M681/M682/E67550/E67560/ E67650/E67660 only | Very Low Settings | Stop Prompt to continue* Continue | Configure the printer action if the document feeder requires cleaning. |

USB Firmware Upgrade menu

To display: At the printer control panel, select the [Support Tools](#) menu, select the [Maintenance](#) menu, and then select the [USB Firmware Upgrade](#) menu.

Insert a USB storage device with a firmware upgrade bundle into the USB port, and follow the on-screen instructions.

Troubleshooting menu

To display: At the printer control panel, select the [Support Tools](#) menu, and then select the [Troubleshooting](#) menu.

In the following table, asterisks (*) indicate the factory default setting.

Table 2-53 Troubleshooting menu

| First level | Second level | Third level | Fourth level | Values | Description | | | | |
|-----------------|----------------------------|-------------------|--------------|--------------------------|---|--|--|----------------------|--|
| Reports | Configuration/Status Pages | | | Settings Menu Map | | | | | |
| | | | | Current Settings Page | | | | | |
| | | | | Configuration Page | | | | | |
| | | | | How to Connect Page | | | | | |
| | | | | Supplies Status Page | | | | | |
| | | | | Usage Page | | | | | |
| | | | | File Directory Page | | | | | |
| | | | | Web Services Status Page | | | | | |
| | | | | Color Usage Job Log | | | | | |
| | | | | <hr/> | | | | | |
| | | | | | Fax Reports | | | Fax Activity Log | |
| | | | | | | | | Billing Codes Report | |
| | | | | | | | | Blocked Fax List | |
| | | | | | | | | Fax Call Report | |
| <hr/> | | | | | | | | | |
| | Other Pages | | | Demonstration Page | | | | | |
| | | | | RGB Samples | | | | | |
| | | | | CMYK Samples | | | | | |
| | | | | PCL Font List | | | | | |
| | | | | PS Font List | | | | | |
| <hr/> | | | | | | | | | |
| Fax Tools | Fax T.30 Trace | Print T.30 Report | | Print | Use to print or configure the fax T.30 trace report. T.30 is the standard that specifies handshaking, protocols, and error correction between fax machines. | | | | |
| Fax models only | | | | | | | | | |

Table 2-53 Troubleshooting menu (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|--------------------------|-------------------------------|----------------------|--------------|---|--|
| Fax Tools (continued) | Fax T.30 Trace (continued) | When to Print Report | | Never automatically print* Print after every fax Print only after fax send jobs Print after any fax error Print only after fax send errors Print only after fax receive errors | Configure the T.30 report to print after certain events. You can choose to print the report after every fax job, every fax job sent, every fax job received, every send error, or every receive error. |
| | Fax V.34 | | | On Off* | Use to disable V.34 modulations if several fax failures have occurred or if phone line conditions require it. |
| | JBIG Compression | | | On Off* | The JBIG compression reduces fax-transmission time, which can result in lower phone charges. However, using JBIG compression sometimes causes compatibility problems with older fax machines. If this occurs, turn off the JBIG compression. |
| | Fax Speaker Mode | | | Normal* Diagnostic | Used by a technician to evaluate and diagnose fax issues by listening to the sounds of fax modulations. |
| | Fax Service Log | | | Print* Cancel | The standard fax log includes basic information such as the time and whether the fax was successful. The detailed fax log shows the intermediate results of the redial process not shown in the standard fax log. |
| Print Quality Pages | PQ Troubleshooting Pages | | | Print | Use to print pages that can help you resolve problems with print quality. |

Table 2-53 Troubleshooting menu (continued)

| First level | Second level | Third level | Fourth level | Values | Description | | | |
|------------------------------------|-------------------------|-------------|--------------|--------------------|--|------------------|--|--|
| Print Quality Pages (continued) | Diagnostics Page | | | Print | Use to print a diagnostics page. The page includes color swatches, diagnostic information, and calibration information. | | | |
| | | | | Print | Use to print a page that helps you resolve problems with print quality. | | | |
| Event Log | | | | Print | Use to print a list of the 50 most recent events in the event log. For each event, the printed log shows the error number, page count, error code, and description or personality. | | | |
| | | | | Delete (trash can) | | | | |
| Paper Path Page | | | | Print | Shows how many pages were printed from each tray. | | | |
| Diagnostic Tests | Disable Cartridge Check | | | | Use this diagnostic test to print internal pages or send an external job to the printer when the toner cartridge is removed or exchanged. Supply errors are ignored while the printer is in this mode. | | | |
| | | | | Paper Path Test | | Number of Copies | Range: 1-500 Default = 1 | Sets the default number of copies for a copy job. This default applies when the Copy or Quick Copy function is initiated from the printer Home screen. The factory default setting is 1. |
| | | | | | | Paper Tray | Select from a list of the available trays. | Generates a test page for testing paper handling features. You can define the path that is used for the test in order to test specific paper paths. |
| | | | | | | Output Sides | 1-sided* 2-sided | |
| | | | | | | Staple | None* Top left or right | |

Table 2-53 Troubleshooting menu (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|---------------------------------|--|-------------|--------------|--|---|
| Diagnostic Tests (continued) | Paper Path Test (continued) | Output Bin | | All Bins Standard Bin* Upper Bin Middle Bin | |
| | Print/Stop Test | | | Stop Next Print Job Delay | |
| | Paper Path Sensor Test | | | Select from a list of the printer sensors. | Initiates a test of the paper path sensors. |
| | Manual Sensor Test | | | Select from a list of available components. Reset Sensors | Test the printer sensors and switches for correct operation. Each sensor is displayed on the control panel screen, along with its status. Manually trip each sensor and watch for it to change on the screen. Press the Stop button to abort the test. |
| | Component Test | | | Select from a list of available components. Repeat | Use this item to exercise individual parts independently to isolate noise, leaking, or other issues. To start the test, select one of the components. The test will run the number of times specified by the Repeat option. The user might be prompted to remove parts from the printer during the test. Press the Stop button to abort the test. |
| | Continuous Scan (M681/M682/E67550/ E67560/E67650/ E67660) | | | 2-sided | |
| | Run Fax Test (M681/ M682/E67550/ E67560/E67650/ E67660) | | | Start | |
| Generate Debug Data | | | | Start | |

Table 2-53 Troubleshooting menu (continued)

| First level | Second level | Third level | Fourth level | Values | Description |
|---|--------------|-------------|--------------|---------------|---|
| Retrieve Diagnostic Data | | | | Send to email | Create files that contain information about the printer that can help identify the cause of problems. |
| Retrieve Fax Diagnostic Data(M681/M682/E67550/E67560/E67650/E67660) | | | | | Enter user access code to retrieve fax diagnostic data. |

Service menu

To display: At the printer control panel, select the [Support Tools](#) menu, and then select the [Service](#) menu.

The [Service](#) menu is locked and requires a personal identification number (PIN) for access. This menu is intended for use by authorized service personnel. See the Service mode function section in the printer troubleshooting manual.

Resolve print-quality problems

Introduction

Use the following information to troubleshoot print-quality problems. The troubleshooting steps can help resolve the following defects:

- Blank pages
- Black pages
- Colors that do not align
- Curled paper
- Dark or light bands
- Dark or light streaks
- Fuzzy print
- Gray background or dark print
- Light print
- Loose toner
- Missing toner
- Scattered dots of toner
- Skewed images
- Smears
- Streaks

Troubleshoot print quality

To resolve print-quality issues, try these steps in the order presented.

Update the printer firmware

Try updating the printer firmware. For more information, go to www.hp.com/support and select the option to **Get software and drivers**. Then follow the prompts to navigate to the firmware download for the printer.

Print from a different software program

Try printing from a different software program. If the page prints correctly, the problem is with the software program from which you were printing.

Check the paper-type setting for the print job

Check the paper type setting when printing from a software program and the printed pages have smears, fuzzy or dark print, curled paper, scattered dots of toner, loose toner, or small areas of missing toner.

Check the paper type setting on the printer

1. Open the tray.
2. Verify that the tray is loaded with the correct type of paper.
3. Close the tray.
4. Follow the control panel instructions to confirm or modify the paper type settings for the tray.

Check the paper type setting (Windows)

1. From the software program, select the **Print** option.
2. Select the printer, and then click the **Properties** or **Preferences** button.
3. Click the **Paper/Quality** tab.
4. From the **Paper Type** drop-down list, click the **More...** option.
5. Expand the list of **Type is:** options.
6. Expand the category of paper types that best describes your paper.
7. Select the option for the type of paper you are using, and click the **OK** button.
8. Click the **OK** button to close the **Document Properties** dialog box. In the **Print** dialog box, click the **OK** button to print the job.

Check the paper type setting (macOS)

1. Click the **File** menu, and then click the **Print** option.
2. In the **Printer** menu, select the printer.
3. By default, the print driver displays the **Copies & Pages** menu. Open the menus drop-down list, and then click the **Finishing** menu.
4. Select a type from the **Media Type** drop-down list.
5. Click the **Print** button.

Check toner-cartridge status

Follow these steps to check the estimated life remaining in the toner cartridges and if applicable, the status of other replaceable maintenance parts.

Step one: Print the supplies status page

1. From the Home screen on the printer control panel, navigate to the **Reports** application, and then select the **Reports** icon.
2. Select the **Configuration/Status Pages** menu.
3. Select **Supplies Status Page**, and then select **Print** to print the page.

Step two: Check supplies status

1. Look at the supplies status report to check the percent of life remaining for the toner cartridges and, if applicable, the status of other replaceable maintenance parts.

Print quality problems can occur when using a toner cartridge that is at its estimated end of life. The supplies status page indicates when a supply level is very low. After an HP supply has reached the very low threshold, HP's premium protection warranty on that supply has ended.

The toner cartridge does not need to be replaced now unless the print quality is no longer acceptable. Consider having a replacement available to install when print quality is no longer acceptable.

If you determine that you need to replace a toner cartridge or other replaceable maintenance parts, the supplies status page lists the genuine HP part numbers.

2. Check to see if you are using a genuine HP cartridge.

A genuine HP toner cartridge has the word "HP" on it, or has the HP logo on it. For more information on identifying HP cartridges go to www.hp.com/go/learnaboutsupplies.

Print a cleaning page


During the printing process paper, toner, and dust particles can accumulate inside the printer and can cause print-quality issues such as toner specks or spatter, smears, streaks, lines, or repeating marks.

Follow these steps to clean the printer's paper path.

1. From the Home screen on the printer control panel, navigate to the [Support Tools](#) application, and then select the [Support Tools](#) icon.
2. Select the following menus:
 - a. [Maintenance](#)
 - b. [Calibration/Cleaning](#)
 - c. [Cleaning Page](#)
3. Select [Print](#) to print the page.

A **Cleaning...** message displays on the printer control panel. The cleaning process takes a few minutes to complete. Do not turn the printer off until the cleaning process has finished. When it is finished, discard the printed page.

Visually inspect the toner cartridge or cartridges

 **NOTE:** If the access door to the cartridge area is locked, contact your managed service provider for assistance with unlocking the door.

Follow these steps to inspect each toner cartridge.

1. Remove the toner cartridges from the printer, and verify that the sealing tape has been removed.
2. Check the memory chip for damage.
3. Examine the surface of the green imaging drum.

 **CAUTION:** Do not touch the imaging drum. Fingerprints on the imaging drum can cause print-quality problems.

4. If you see any scratches, fingerprints, or other damage on the imaging drum, replace the toner cartridge.
5. Reinstall the toner cartridge, and print a few pages to see if the problem has resolved.

Check paper and the printing environment

Step one: Use paper that meets HP specifications

Some print-quality problems arise from using paper that does not meet HP specifications.

- Always use a paper type and weight that this printer supports.
- Use paper that is of good quality and free of cuts, nicks, tears, spots, loose particles, dust, wrinkles, voids, staples, and curled or bent edges.
- Use paper that has not been previously printed on.
- Use paper that does not contain metallic material, such as glitter.
- Use paper that is designed for use in laser printers. Do not use paper that is designed only for use in Inkjet printers.
- Use paper that is not too rough. Using smoother paper generally results in better print quality.

Step two: Check the environment

The environment can directly affect print quality and is a common cause for print-quality or paper-feeding issues. Try the following solutions:

- Move the printer away from drafty locations, such as open windows or doors, or air-conditioning vents.
- Make sure the printer is not exposed to temperatures or humidity outside of printer specifications.
- Do not place the printer in a confined space, such as a cabinet.
- Place the printer on a sturdy, level surface.
- Remove anything that is blocking the vents on the printer. The printer requires good air flow on all sides, including the top.
- Protect the printer from airborne debris, dust, steam, grease, or other elements that can leave residue inside the printer.

Step three: Set the individual tray alignment

Follow these steps when text or images are not centered or aligned correctly on the printed page when printing from specific trays.

1. From the Home screen on the printer control panel, navigate to the [Settings](#) application, and then select the [Settings](#) icon.
2. Select the following menus:
 - a. [Copy/Print](#) or [Print](#)
 - b. [Print Quality](#)
 - c. [Image Registration](#)
3. Select [Tray](#), and then select the tray to adjust.

4. Select [Print Test Page](#), and then follow the instructions on the printed pages.
5. Select [Print Test Page](#) again to verify the results, and then make further adjustments if necessary.
6. Select [Done](#) to save the new settings.

Try a different print driver

Try a different print driver when printing from a software program and the printed pages have unexpected lines in graphics, missing text, missing graphics, incorrect formatting, or substituted fonts.


Download any of the following drivers from the HP Web site: www.hp.com/support/colorljM652, www.hp.com/support/colorljM653, www.hp.com/support/colorljE65050, www.hp.com/support/colorljE65060, www.hp.com/support/colorljE65150, www.hp.com/support/colorljE65160, www.hp.com/support/colorljM681MFP, www.hp.com/support/colorljM682MFP, www.hp.com/support/colorljE67550MFP, www.hp.com/support/colorljE67560MFP, www.hp.com/support/colorljE67650MFP, or www.hp.com/support/colorljE67660MFP.

| | |
|---------------------------|--|
| HP PCL 6 V3 driver | This printer-specific print driver supports Windows 7 and newer operating systems that support version 3 drivers. For a list of supported operating systems, go to www.hp.com/go/support . |
| HP PCL-6 V4 driver | This product-specific print driver supports Windows 8 and newer operating systems that support version 4 drivers. For a list of supported operating systems, go to www.hp.com/go/support . |
| HP UPD PS driver | <ul style="list-style-type: none"> • Recommended for printing with Adobe® software programs or with other highly graphics-intensive software programs • Provides support for printing from postscript emulation needs, or for postscript flash font support |
| HP UPD PCL 6 | <ul style="list-style-type: none"> • Recommended for printing in all Windows environments • Provides the overall best speed, print quality, and printer feature support for most users • Developed to align with Windows Graphic Device Interface (GDI) for best speed in Windows environments • Might not be fully compatible with third-party and custom software programs that are based on PCL 5 |

Troubleshoot image defects

Table 2-54 Image defects table quick reference

[Table 2-62 Light print on page 301](#)

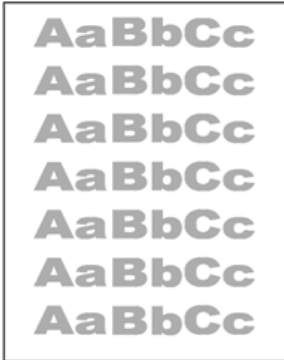

[Table 2-60 Gray background or dark print on page 300](#)



[Table 2-57 Blank page — No print on page 298](#)



[Table 2-56 Black page on page 297](#)



[Table 2-55 Banding defects on page 297](#)



[Table 2-64 Streak defects on page 303](#)

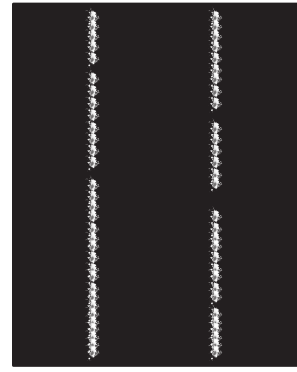


Table 2-54 Image defects table quick reference (continued)

Table 2-59 Fixing/fuser defects on page 299

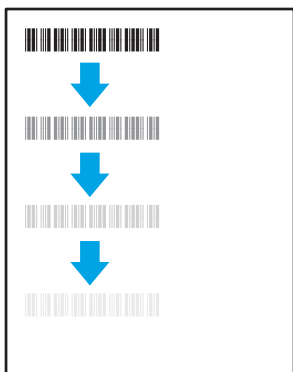


Table 2-61 Image placement defects on page 300



Table 2-58 Color plane registrations defects (color models only) on page 298

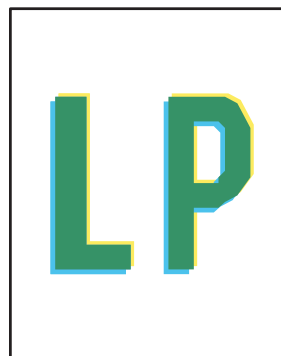


Table 2-63 Output defects on page 302

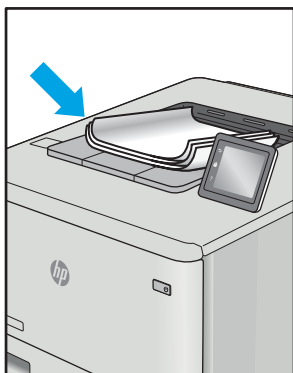



Image defects, no matter the cause, can often be resolved using the same steps. Use the following steps as a starting point for solving image defect issues.

1. Reprint the document. Print quality defects can be intermittent in nature or can go away completely with continued printing.
2. Check the condition of the cartridge or cartridges. If a cartridge is in a **Very Low** state (it has passed the rated life), replace the cartridge.
3. Make sure that the driver and tray print mode settings match the media that is loaded in the tray. Try using a different ream of media or a different tray. Try using a different print mode.
4. Make sure that the printer is within the supported operating temperature/humidity range.
5. Make sure that the paper type, size, and weight are supported by the printer. See the printer support page at support.hp.com for a list of the supported paper sizes and types for the printer.

 **NOTE:** The term “fusing” refers to the part of the printing process where toner is affixed to paper.

The following examples depict letter-size paper that has passed through the printer short-edge first.

Table 2-55 Banding defects


| Sample | Description | Possible solutions |
|---|--|---|
|  | <p>Dark or light lines which repeat down the length of the page, and are wide-pitch and/or impulse bands. They might be sharp or soft in nature. The defect displays only in areas of fill, not in text or sections with no printed content.</p> | <ol style="list-style-type: none"> 1. Reprint the document. 2. Try printing from another tray. 3. Replace the cartridge. 4. Use a different paper type. 5. Enterprise models only: From the Home screen on the printer control panel, go to the Adjust Paper Types menu, and then choose a print mode that is designed for a slightly heavier media than what you are using. This slows the print speed and might improve the print quality. 6. If the issue persists, go to support.hp.com. |

Table 2-56 Black page


| Sample | Description | Possible solutions |
|--|--|--|
|  | <p>The entire printed page is black.</p> | <ol style="list-style-type: none"> 1. Visually inspect the cartridge to check for damage. 2. Make sure that the cartridge is installed correctly. 3. Replace the cartridge 4. If the issue persists, go to support.hp.com. |

Table 2-57 Blank page — No print


| Sample | Description | Possible solutions |
|---|--|---|
|  | <p>The page is completely blank and contains no printed content.</p> | <ol style="list-style-type: none"> 1. Make sure that the cartridges are genuine HP cartridges. 2. Make sure that the cartridge is installed correctly. 3. Print with a different cartridge. 4. Check the paper type in the paper tray and adjust the printer settings to match. If necessary, select a lighter paper type. 5. If the issue persists, go to support.hp.com. |

Table 2-58 Color plane registrations defects (color models only)

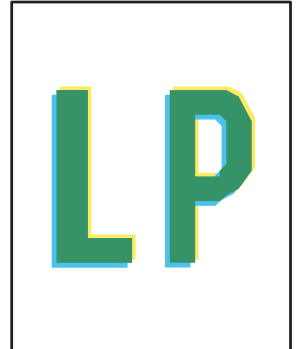
| Sample | Description | Possible solutions |
|--|---|--|
|  | <p>One or more color plane(s) is not aligned with the other color planes. This registration error will typically occur with yellow.</p> | <ol style="list-style-type: none"> 1. Reprint the document. 2. From the printer control panel, calibrate the printer. 3. If a cartridge has reached a Very Low state, or the printed output is severely faded, replace the cartridge. 4. From the printer control panel use the Restore Calibration feature to reset the printer's calibration settings to the factory defaults. 5. If the issue persists, go to support.hp.com. |

Table 2-59 Fixing/fuser defects

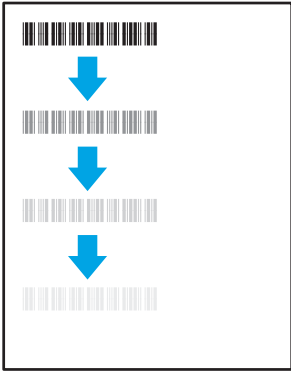
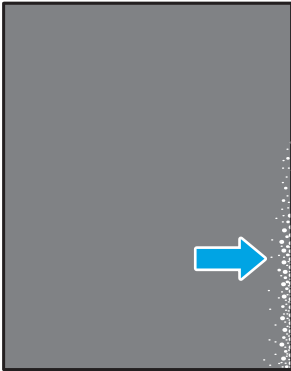
| Sample | Description | Possible solutions |
|--|---|--|
|  | <p>Slight shadows or offsets of the image are repeated down the page. The repeated image might fade with each recurrence.</p> | <ol style="list-style-type: none"> 1. Reprint the document. 2. Check the paper type in the paper tray and adjust the printer settings to match. If necessary, select a lighter paper type. 3. If the issue persists, go to support.hp.com. |
|  | <p>Toner rubs off along either edge of the page. This defect is more common at the edges of high-coverage jobs, and on light media types, but can occur anywhere on the page.</p> | <ol style="list-style-type: none"> 1. Reprint the document. 2. Check the paper type in the paper tray and adjust the printer settings to match. If necessary, select a heavier paper type. 3. Enterprise models only: From the printer control panel, go to the Edge-to-Edge menu and then select Normal. Reprint the document. 4. Enterprise models only: From the printer control panel, select Auto Include Margins and then reprint the document. 5. If the issue persists, go to support.hp.com. |

Table 2-60 Gray background or dark print


| Sample | Description | Possible solutions |
|---|---|--|
|  | <p>The image or text is darker than expected and/or the background is gray.</p> | <ol style="list-style-type: none"> 1. Make sure that the paper in the trays has not already been run through the printer. 2. Use a different paper type. 3. Reprint the document. 4. Mono models only: From the Home screen on the printer control panel, go to the Adjust Toner Density menu, and then adjust the toner density to a lower level. 5. Make sure that the printer is within the supported operating temperature and humidity range. 6. Replace the cartridge. 7. If the issue persists, go to support.hp.com. |

Table 2-61 Image placement defects


| Sample | Description | Possible solutions |
|---|---|---|
|  | <p>The image is not centered, or is skewed on the page. The defect occurs when the paper is not positioned properly as it is pulled from the tray and moves through the paper path.</p> | <ol style="list-style-type: none"> 1. Reprint the document. 2. Remove the paper and then reload the tray. Make sure that all the paper edges are even on all sides. 3. Make sure that the top of the paper stack is below the tray-full indicator. Do not overfill the tray. 4. Make sure that the paper guides are adjusted to the correct size for the paper. Do not adjust the paper guides tightly against the paper stack. Adjust them to the indentations or markings in the tray. 5. If the issue persists, go to support.hp.com. |

Table 2-62 Light print

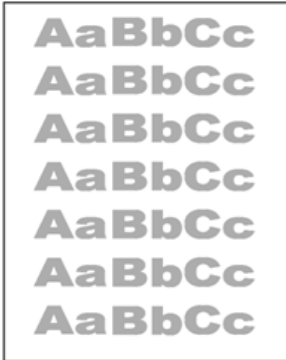
| Sample | Description | Possible solutions |
|---|---|--|
|  | The printed content is light or faded on the entire page. | <ol style="list-style-type: none">1. Reprint the document.2. Remove the cartridge, and then shake it to redistribute the toner.3. Mono models only: Make sure that the EconoMode setting is disabled, both at the printer control panel and in the print driver.4. Make sure that the cartridge is installed correctly.5. Print a Supplies Status Page and check the life and usage of the cartridge.6. Replace the cartridge.7. If the issue persists, go to support.hp.com. |

Table 2-63 Output defects




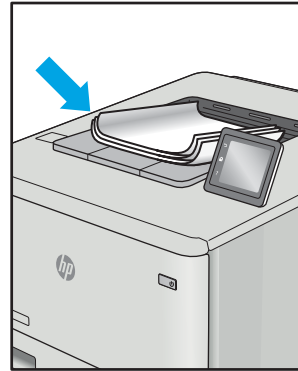
| Sample | Description | Possible solutions |
|--|--|---|
|  | <p>Printed pages have curled edges. The curled edge can be along the short or long side of the paper. Two types of curl are possible:</p> <ul style="list-style-type: none"> • Positive curl: The paper curls toward the printed side. The defect occurs in dry environments or when printing high-coverage pages. • Negative curl: The paper curls away from the printed side. The defect occurs in high-humidity environments or when printing low-coverage pages. | <ol style="list-style-type: none"> 1. Reprint the document. 2. Positive curl: From the printer control panel, select a heavier paper type. The heavier paper type creates a higher temperature for printing. Negative curl: From the printer control panel, select a lighter paper type. The lighter paper type creates a lower temperature for printing. Try storing the paper in a dry environment prior to use, or use freshly-opened paper. 3. Print in duplex mode. 4. If the issue persists, go to support.hp.com. |
|  | <p>The paper does not stack well in the output tray. The stack might be uneven, skewed, or the pages might be pushed out of the tray and onto the floor. Any of the following conditions can cause this defect:</p> <ul style="list-style-type: none"> • Extreme paper curl • The paper in the tray is wrinkled or deformed • The paper is a non-standard paper type, such as envelopes • The output tray is too full | <ol style="list-style-type: none"> 1. Reprint the document. 2. Extend the output bin extension. 3. If the defect is caused by extreme paper curl, refer to the troubleshooting steps for "Output curl." 4. Use a different paper type. 5. Use freshly-opened paper. 6. Remove the paper from the output tray before the tray gets too full. 7. If the issue persists, go to support.hp.com. |

Table 2-64 Streak defects

| Sample | Description | Possible solutions |
|--|--|---|
|  | <p>Light vertical streaks that usually span the length of the page. The defect displays only in areas of fill, not in text or sections with no printed content.</p> | <ol style="list-style-type: none"> 1. Reprint the document. 2. Remove the cartridge, and then shake it to redistribute the toner. 3. If the issue persists, go to support.hp.com. <p>NOTE: Both light and dark vertical streaks can occur when the printing environment is outside the specified range for temperature or humidity. Refer to your printer's environmental specifications for allowable temperature and humidity levels.</p> |
|  | <p>Dark vertical lines which occur down the length of the page. The defect might occur anywhere on the page, in areas of fill or in sections with no printed content. On color models, these lines or streaks will also be visible on the ITB cleaning page.</p> | <ol style="list-style-type: none"> 1. Reprint the document. 2. Remove the cartridge, and then shake it to redistribute the toner. 3. Print a cleaning page. 4. Check the toner level in the cartridge. 5. If the issue persists, go to support.hp.com. |

Clean the printer

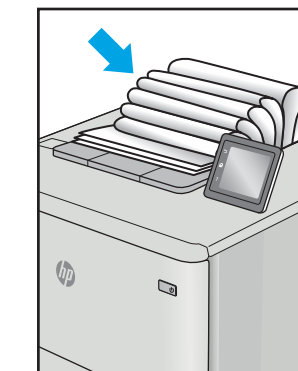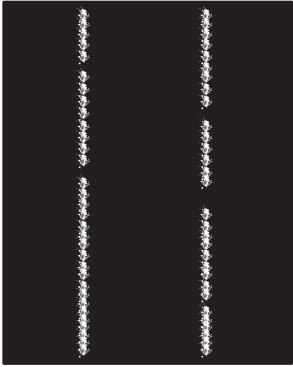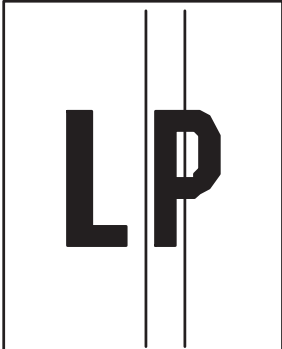

NOTE: To clean the printer exterior, use a soft, water-moistened cloth.

- [Clean the paper path](#)
- [Print a cleaning page](#)
- [Enable and configure auto cleaning \(touchscreen control panels only\)](#)
- [Check the scanner glass for dirt and smudges](#)
- [Clean the pickup rollers and separation pad in the document feeder \(MFP only\)](#)

Clean the paper path

Over time, particles of toner and paper accumulate inside the printer. This can cause print-quality problems during printing. Cleaning the paper path eliminates or reduces these problems.

Clean the paper path and toner-cartridge areas every time that the toner cartridge is changed or whenever print-quality problems occur. As much as possible, keep the printer free from dust and debris.

Print a cleaning page

Print the cleaning page from a touchscreen control panel

1. From the Home screen on the printer control panel, swipe until the [Support Tools](#) menu displays. Touch the [Support Tools](#) icon to open the menu.
2. Open the following menus:
 - [Maintenance](#)
 - [Calibration/Cleaning](#)
 - [Cleaning Page](#)
3. Select [Print](#) to print the page.

A **Cleaning...** message displays on the printer control panel. The cleaning process takes a few minutes to complete. Do not turn the printer off until the cleaning process has finished. When it is finished, discard the printed page.

Print the cleaning page from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the down arrow ▼ button to scroll to [Device Maintenance](#), and then press the [OK](#) button.
2. Use the down arrow ▼ button to scroll to [Calibration/Cleaning](#), and then press the [OK](#) button.
3. If necessary, use the down arrow ▼ button to scroll to [Cleaning](#), and then press the [OK](#) button to print the page.
4. Follow the instruction on the printed cleaning page to finish the cleaning page process.

Enable and configure auto cleaning (touchscreen control panels only)

1. From the Home screen on the printer control panel, swipe until the [Support Tools](#) menu displays. Touch the [Support Tools](#) icon to open the menu.
2. Open the following menus:
 - [Maintenance](#)
 - [Calibration/Cleaning](#)
 - [Cleaning Page](#)
3. Select [Print](#) to print the page.

A **Cleaning...** message displays on the printer control panel. The cleaning process takes a few minutes to complete. Do not turn the printer off until the cleaning process has finished. When it is finished, discard the printed page.


Check the scanner glass for dirt and smudges

Over time, specks of debris might collect on the scanner glass and white plastic backing, which can affect performance. Use the following procedure to clean the scanner if the printed pages have streaks, unwanted lines, black dots, poor print quality, or unclear text.

1. Press the power button to turn the printer off, and then disconnect the power cable from the electrical outlet.




2. Open the scanner lid.

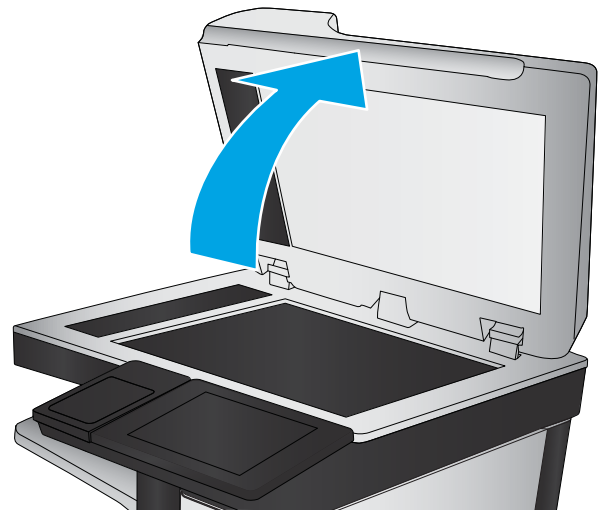

3. Clean the scanner glass and the document feeder strips with a soft cloth or sponge that has been moistened with nonabrasive glass cleaner.

CAUTION: Do not use abrasives, acetone, benzene, ammonia, ethyl alcohol, or carbon tetrachloride on any part of the printer; these can damage the printer. Do not place liquids directly on the glass or platen. They might seep and damage the printer.


NOTE: If you are having trouble with streaks on copies when you are using the document feeder, be sure to clean the small strip of glass on the left side of the scanner.

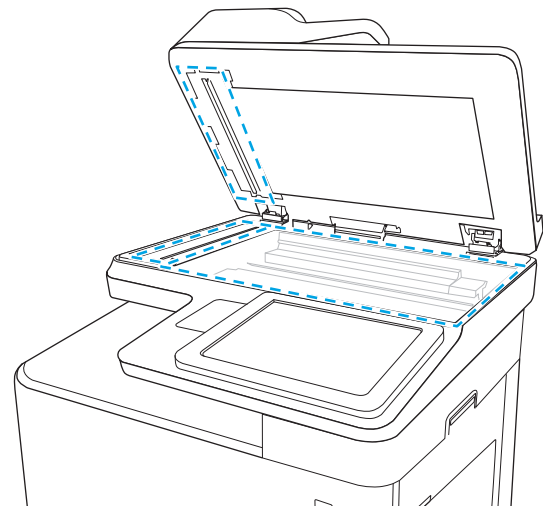


4. Dry the glass and white plastic parts with a chamois or a cellulose sponge to prevent spotting.
5. Connect the power cable to an outlet, and then press the power button to turn the printer on.

Clean the pickup rollers and separation pad in the document feeder (MFP only)


1. Lift the document-feeder latch.

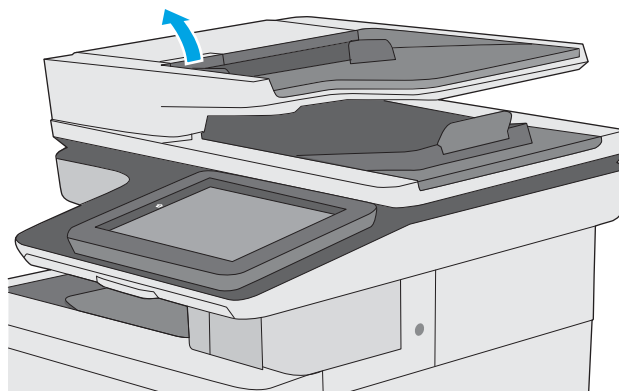

2. Open the document-feeder cover.

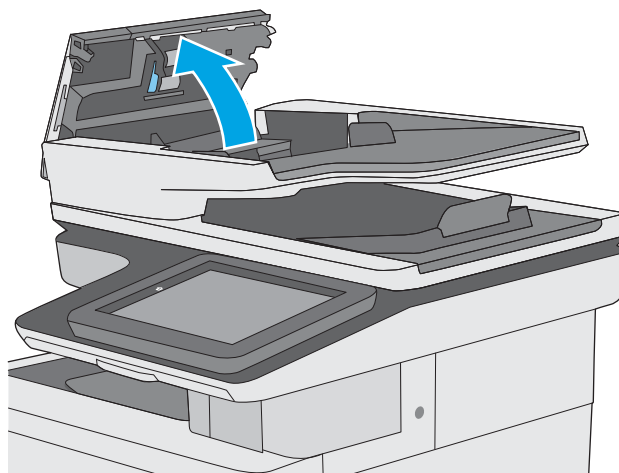


3. Remove any visible lint or dust from each of the feed rollers and the separation pad using compressed air or a clean lint-free cloth moistened with warm water.

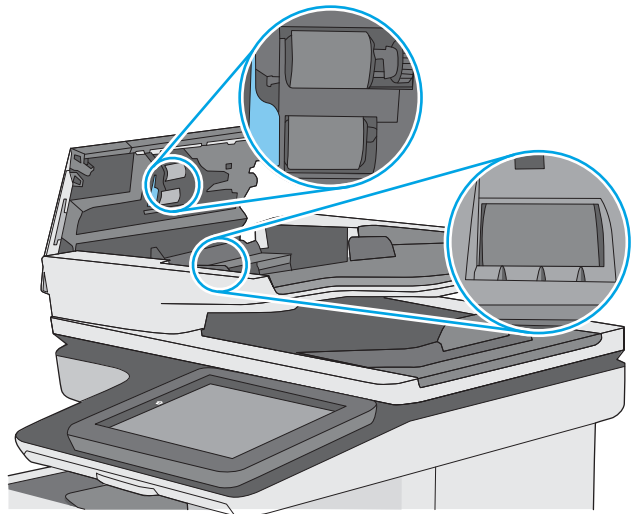

4. Close the document-feeder cover.

NOTE: Verify that the latch on the top of the document-feeder cover is completely closed.

If the error persists, install a document feeder maintenance kit (5851-7202).

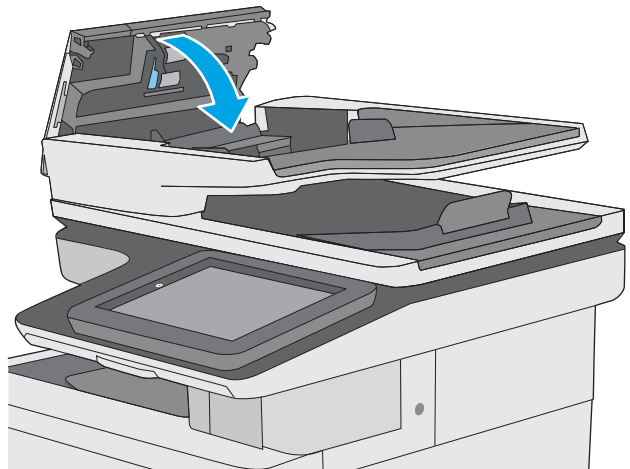

Solve paper handling problems

- [Printer feeds incorrect page size](#)
- [Printer pulls from incorrect tray](#)
- [Printer will not duplex or duplexes incorrectly](#)
- [Paper does not feed from Tray 2-X](#)
- [Output is curled or wrinkled](#)
- [Printer does not pick up paper or misfeeds](#)
- [Clear paper jams](#)

Printer feeds incorrect page size

Table 2-65 Printer feeds incorrect page size

| Cause | Solution |
|---|--|
| The correct size paper is not loaded in the tray. | Load the correct size paper in the tray. |
| The correct size paper is not selected in the software program or printer driver. | Confirm that the settings in the software program and printer driver are correct, because the software program settings override the printer driver and control panel settings, and the printer driver settings override the control panel settings. |
| The correct size paper for the tray is not selected in the printer control panel. | From the control panel, select the correct size paper for the tray. |
| The paper size is not configured correctly for the tray. | Print a configuration page to determine the paper size for which the tray is configured. |
| The guides in the tray are not against the paper. | Verify that the paper guides are touching the paper. |

Printer pulls from incorrect tray

Table 2-66 Printer pulls from incorrect tray

| Cause | Solution |
|--|---|
| A driver for a different printer is in use. | Use a driver for this printer. |
| The specified tray is empty. | Load paper in the specified tray. |
| The paper size is not configured correctly for the input tray. | Print a configuration page or use the control panel to determine the paper size for which the tray is configured. |
| The guides in the tray are not against the paper. | Verify that the guides are touching the paper. |

Printer will not duplex or duplexes incorrectly

Table 2-67 Printer will not duplex (print 2-sided jobs) or duplexes incorrectly

| Cause | Solution |
|--|---|
| The duplex job is trying to use unsupported paper. | Verify that the paper is supported for duplex printing. |

Table 2-67 Printer will not duplex (print 2-sided jobs) or duplexes incorrectly (continued)

| Cause | Solution |
|---|--|
| The printer driver is not set up for duplex printing. | Set up the printer driver to enable duplex printing. |
| The first page is printing on the back of preprinted forms or letterhead. | Load preprinted forms and letterhead in Tray 1 with the letterhead or printed side down, with the top of the page leading into the printer. For Tray 2-X, load the paper printed side up with the top of the page toward the right of the printer. |
| The printer model does not support automatic 2-sided printing. | The printer model does not support automatic 2-sided printing. |

Paper does not feed from Tray 2-X

Table 2-68 Paper does not feed from Tray 2-X

| Cause | Solution |
|---|--|
| The correct size paper is not loaded. | Load the correct size paper. |
| The input tray is empty. | Load paper in the input tray. |
| The correct paper type for the input tray is not selected in the printer control panel. | From the printer control panel, select the correct paper type for the input tray. Trays configured for a paper type with a specific weight range will not match a print job that specifies an exact weight, even if the specified weight is within the weight range. |
| Paper from a previous jam has not been completely removed. | Open the printer and remove any paper in the paper path. Closely inspect the fuser area for jams. |
| None of the optional trays appear as input tray options. | The optional trays only display as available if they are installed. Verify that any optional trays are correctly installed. Verify that the printer driver has been configured to recognize the optional trays. |
| An optional tray is incorrectly installed. | Print a configuration page to confirm that the optional tray is installed. If not, verify that the tray is correctly attached to the printer. |
| The paper size is not configured correctly for the input tray. | Print a configuration page or use the control panel to determine the paper size for which the tray is configured. |
| The guides in the tray are not against the paper. | Verify that the guides are touching the paper. |

Output is curled or wrinkled

Table 2-69 Output is curled or wrinkled

| Cause | Solution |
|---|--|
| Paper does not meet the specifications for this printer. | Use only paper that meets the HP paper specifications for this printer. |
| The correct paper type for the input tray is not selected in the printer control panel. | From the printer control panel, select the correct paper type for the input tray. Trays configured for a paper type with a specific weight range will not match a print job that specifies an exact weight, even if the specified weight is within the weight range. |
| Paper is damaged or in poor condition. | Remove paper from the input tray and load paper that is in good condition. |
| The printer is operating in an excessively humid environment. | Verify that the printing environment is within humidity specifications. |

Table 2-69 Output is curled or wrinkled (continued)


| Cause | Solution |
|--|---|
| The print job consist of large, solid-filled areas. | Large, solid-filled areas can cause excessive curl. Try using a different pattern. |
| Paper used was not stored correctly and might have absorbed moisture. | Remove paper and replace it with paper from a fresh, unopened package. |
| Paper has poorly cut edges. | Remove paper, flex it, rotate it 180 degrees or turn it over, and then reload it into the input tray. Do not fan paper. If the problem persists, replace the paper. |
| The specific paper type was not configured for the tray or selected in the software. | Configure the software for the paper (see the software documentation). Configure the tray for the paper. |
| The paper has previously been used for a print job. | Do not re-use paper. |

Printer does not pick up paper or misfeeds

Use the following procedures if the printer will not pick or misfeeds paper.

The printer does not pick up paper

If the printer does not pick up paper from the tray, try these solutions.

 **NOTE:** Tray 1 and Tray 2 are optimal for paper pickup when using special paper or media other than 20lb plain paper. For Tray 1 and Tray 2 the printer increases the number of attempts to pick up a page, which increases the reliability of successfully picking the page from the tray and decreases the possibility of a mis-pick jam.

HP recommends using Tray 1 or Tray 2 if the printer is experiencing excessive or reoccurring jams from trays other than Tray 1 and Tray 2, or for print jobs that require media other than 20lb plain paper.

HP recommends printing labels from Tray 2 only.

1. Open the printer and remove any jammed sheets of paper.
2. Load the tray with the correct size of paper for the job.
3. Make sure the paper size and type are set correctly on the printer control panel.
4. Make sure the paper guides in the tray are adjusted correctly for the size of paper. Adjust the guides to the appropriate indentation in the tray.
5. Check the printer control panel to see if the printer is waiting for an acknowledgment to the feed the paper manually prompt. Load paper, and continue.
6. The rollers above the tray might be contaminated. Clean the rollers with a lint-free cloth dampened with warm water.

The printer picks up multiple sheets of paper

If the printer picks up multiple sheets of paper from the tray, try these solutions.

1. Remove the stack of paper from the tray and flex it, rotate it 180 degrees, and flip it over. *Do not fan the paper.* Return the stack of paper to the tray.
2. Use only paper that meets HP specifications for this printer.
3. Use paper that is not wrinkled, folded, or damaged. If necessary, use paper from a different package.
4. Make sure the tray is not overfilled. If it is, remove the entire stack of paper from the tray, straighten the stack, and then return some of the paper to the tray.
5. Make sure the paper guides in the tray are adjusted correctly for the size of paper. Adjust the guides to the appropriate indentation in the tray.
6. Make sure the printing environment is within recommended specifications.

Paper does not feed automatically

Table 2-70 Paper does not feed automatically

| Cause | Solution |
|--|---|
| Manual feed is selected in the software program. | Load Tray 1 with paper, or, if the paper is loaded, press the OK button. |
| The correct size paper is not loaded. | Load the correct size paper. |
| The input tray is empty. | Load paper into the input tray. |
| Paper from a previous jam has not been completely removed. | Open the printer and remove any paper in the paper path. |
| The paper size is not configured correctly for the input tray. | Print a configuration page or use the control panel to determine the paper size for which the tray is configured. |
| The guides in the tray are not against the paper. | Verify that the rear and width paper guides are touching the paper. |

Clear paper jams

- [Paper path jam sensor locations](#)
- [Auto-navigation for clearing paper jams](#)
- [Experiencing frequent or recurring paper jams?](#)
- [Clear paper jams in the document feeder](#)
- [13.A1 tray 1 paper jam](#)
- [13.A2 tray 2 paper jam](#)
- [13.A3, 13.A4, 13.A5 tray 3, tray 4, tray 5 paper jam](#)
- [13.A 2000-sheet tray paper jam](#)
- [13.B9, 13.B2, 13.FF fuser paper jam](#)
- [Clear jams in the output bin](#)
- [13.70.stapler/stacker paper jam](#)
- [Clear staple jams in the 3-bin stapler/stacker](#)
- [Change jam recovery](#)

Paper path jam sensor locations

 **NOTE:** Use the figures below to identify the locations of sensors where reoccurring jams are found.

Figure 2-92 Printer jam sensors

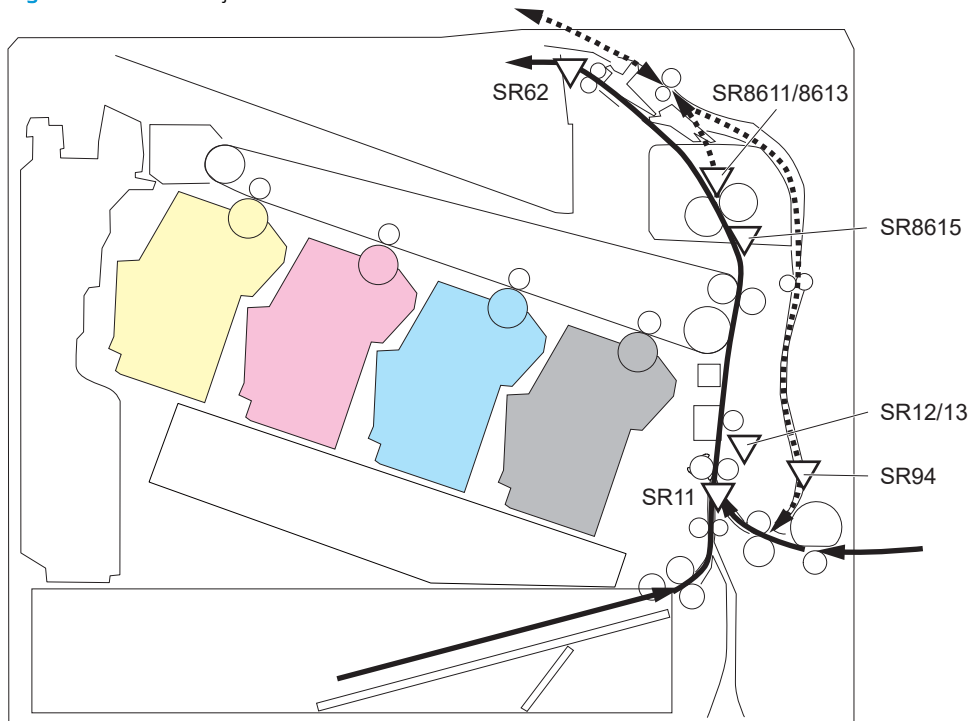


Table 2-71 Printer base jam sensors

| Sensor | Description | Sensor | Description |
|--------|-----------------------------------|--------|-----------------------|
| SR11 | Registration sensor | SR94 | Duplex feed sensor |
| SR12 | Registration media width sensor 1 | SR8611 | Fuser output sensor 1 |
| SR13 | Registration media width sensor 2 | SR8613 | Fuser output sensor 2 |
| SR62 | FD1 media full sensor | SR8615 | Fuser loop sensor |

Figure 2-93 1x550-sheet paper-feeder jam sensors

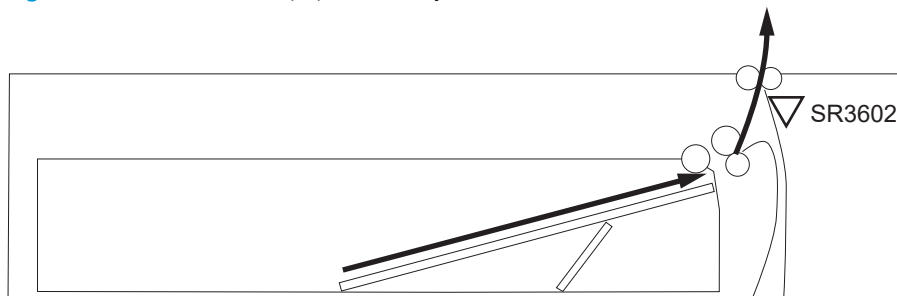


Table 2-72 1x550-sheet and 3x550-sheet paper-deck jam sensors

| Sensor | Description |
|--------|--|
| SR3602 | 1x550-sheet paper feeder media feed sensor |

Figure 2-94 1x550-sheet and 3x550-sheet paper-deck jam sensors

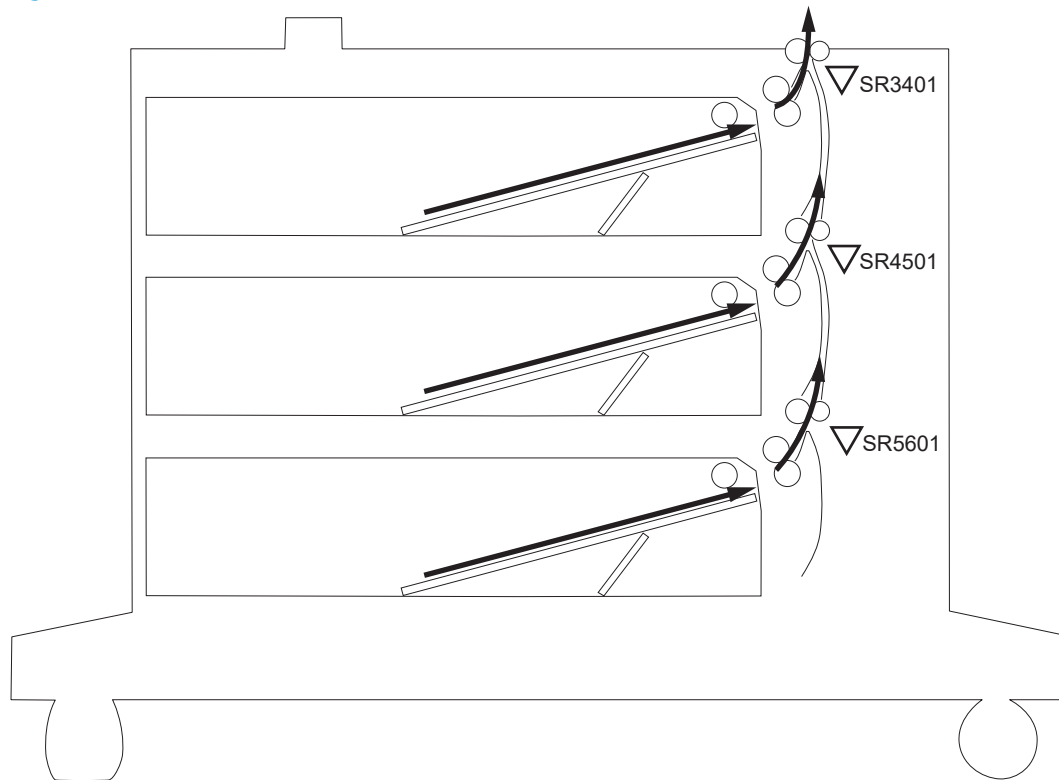


Table 2-73 1x550-sheet and 3x550-sheet paper-deck jam sensors

| Sensor | Description |
|--------|---|
| SR3401 | PD cassette 1 media feed sensor |
| SR4501 | PD cassette 2 media feed sensor (1x350-sheet paper deck only) |
| SR5601 | PD cassette 3 media feed sensor (1x350-sheet paper deck only) |

Figure 2-95 2,550-sheet paper deck jam sensors

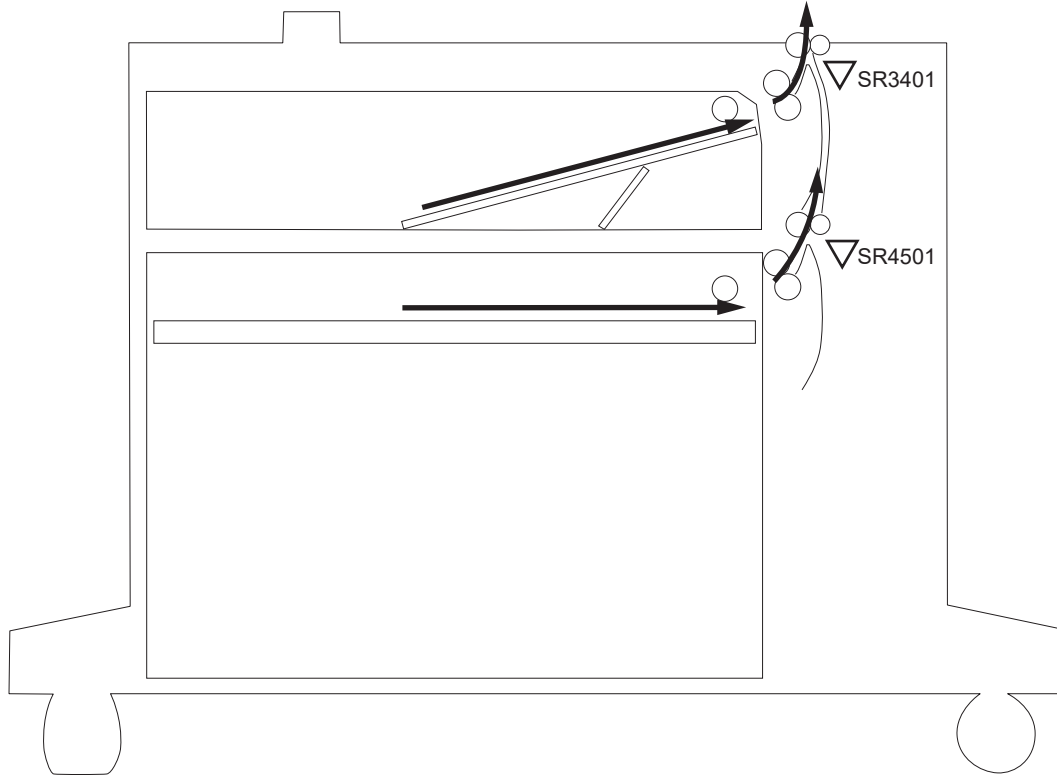


Table 2-74 2,550-sheet paper deck jam sensors

| Sensor | Description |
|--------|---------------------------------|
| SR3401 | PD cassette 1 media feed sensor |
| SR4501 | PD cassette 2 media feed sensor |

Figure 2-96 Document feeder jam sensors

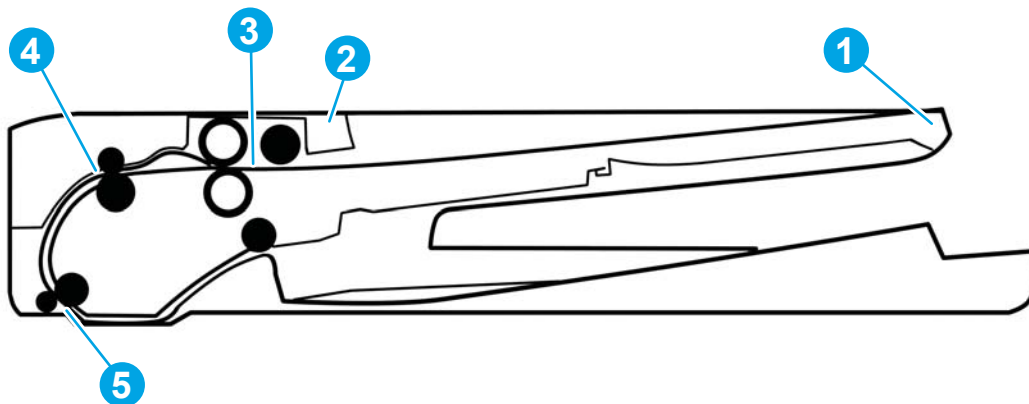


Table 2-75 Document feeder, sensors block diagram

| Item | Description |
|------|------------------|
| 1 | Length sensor |
| 2 | Jam cover sensor |

Table 2-75 Document feeder, sensors block diagram (continued)

| Item | Description |
|------|----------------------|
| 3 | Paper present sensor |
| 4 | Deskew sensor |
| 5 | Paper path sensor |

Auto-navigation for clearing paper jams

The auto-navigation feature assists in clearing jams by providing step-by-step instructions on the control panel. When you complete a step, the printer displays instructions for the next step until you have completed all steps in the procedure.

Experiencing frequent or recurring paper jams?

To reduce the number of paper jams, try these solutions.



NOTE: To see a video that demonstrates how to load paper in a way that reduces the number of paper jams, click [here](#).


1. Use only paper that meets HP specifications for this printer.
2. Use paper that is not wrinkled, folded, or damaged. If necessary, use paper from a different package.
3. Use paper that has not previously been printed or copied on.
4. Make sure the tray is not overfilled. If it is, remove the entire stack of paper from the tray, straighten the stack, and then return some of the paper to the tray.
5. Make sure the paper guides in the tray are adjusted correctly for the size of paper. Adjust the guides so they are touching the paper stack without bending it.
6. Make sure that the tray is fully inserted in the printer.
7. If you are printing on heavy, embossed, or perforated paper, use the manual feed feature and feed sheets one at a time.
8. Open the [Trays](#) menu on the printer control panel. Verify that the tray is configured correctly for the paper type and size.
9. Make sure the printing environment is within recommended specifications.

Clear paper jams in the document feeder


Use the following procedure to check for paper in all possible jam locations related to the document feeder. When a jam occurs, the control panel might display a message and an animation that assists in clearing the jam.

- **31.13.XX Jam in Document Feeder**


1. Lift the document-feeder latch.

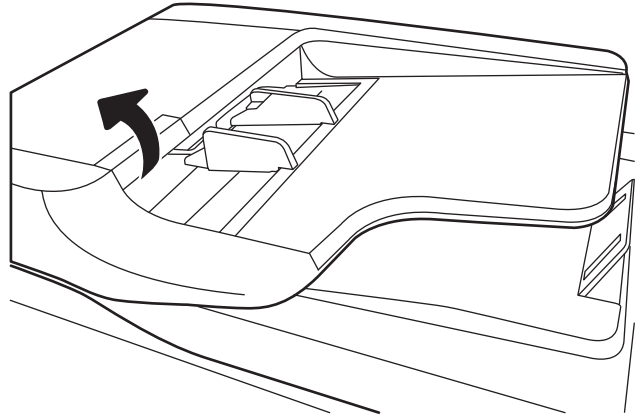


2. Open the document-feeder cover.

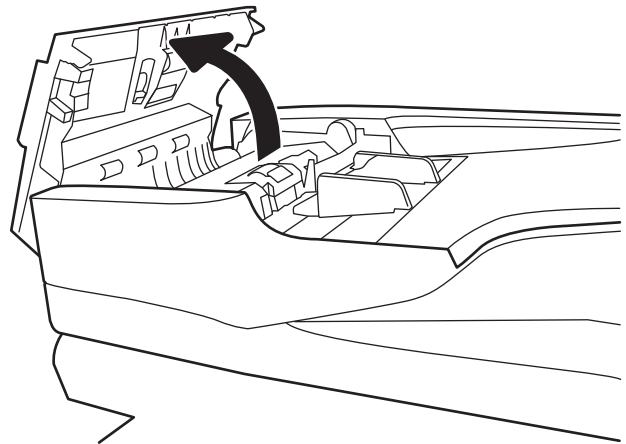

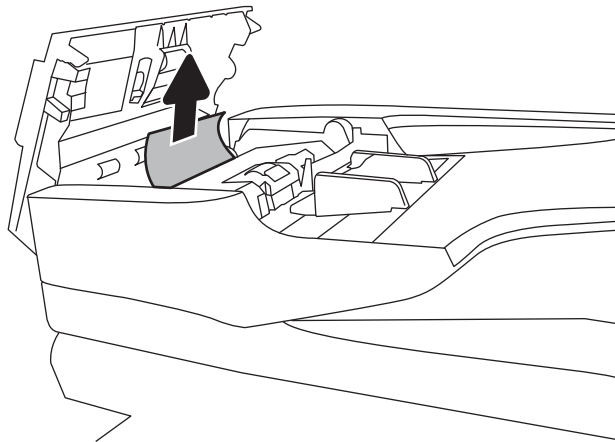

3. Gently remove any jammed paper.

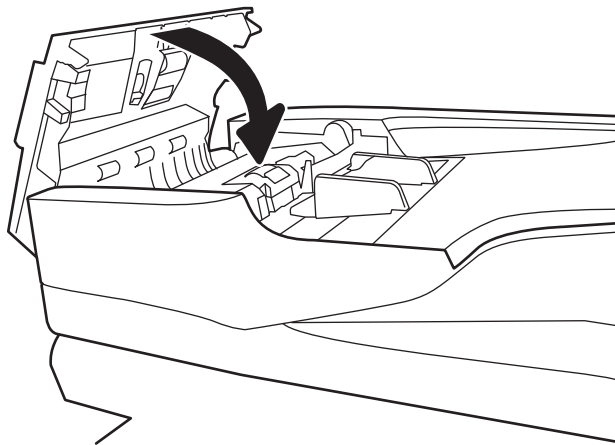

4. Close the document-feeder cover.



 **NOTE:** To avoid jams, make sure the guides in the document feeder input tray are adjusted tightly against the document. Remove all staples, paper clips, or tape from original documents.


 **NOTE:** Original documents that are printed on heavy, glossy paper can jam more frequently than originals that are printed on plain paper.

13.A1 tray 1 paper jam


Use the following procedure to check for paper in all possible jam locations related to Tray 1. When a jam occurs, the control panel might display a message and an animation that assists in clearing the jam.

- 13.A1.XX Jam in tray 1


1. If jammed paper is visible in Tray 1, clear the jam by gently pulling the paper straight out.

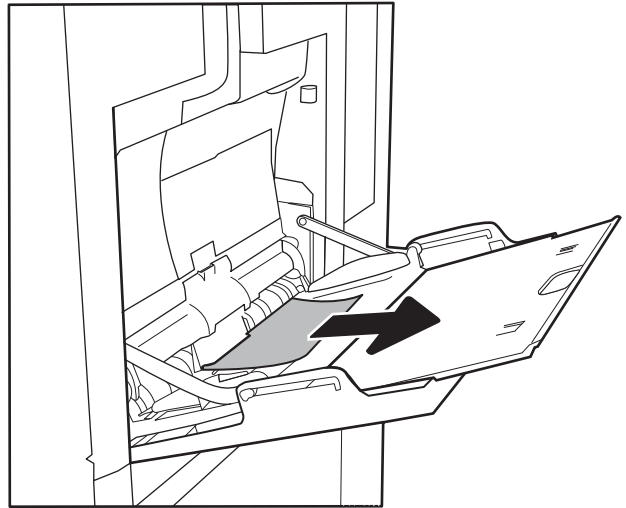


2. If you cannot remove the paper, or if no jammed paper is visible in Tray 1, close Tray 1 and open the right door.

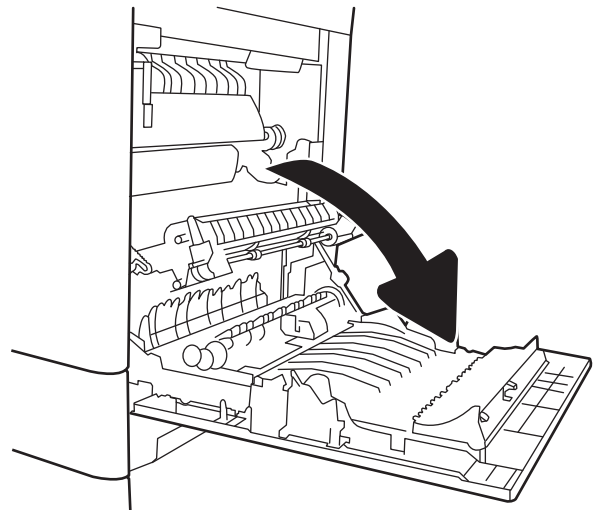

3. Gently pull out any jammed paper.

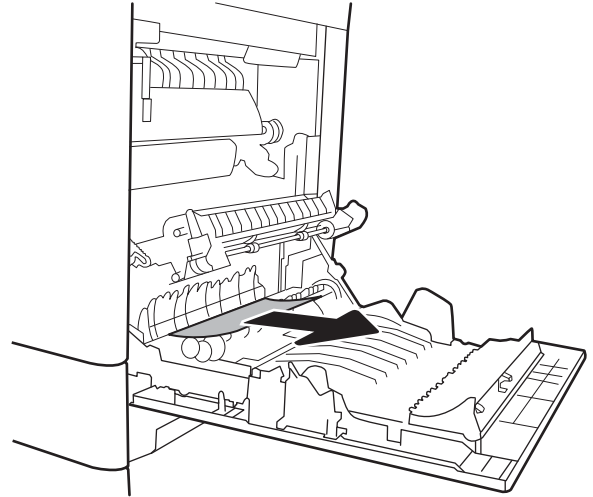

4. Close the right door.

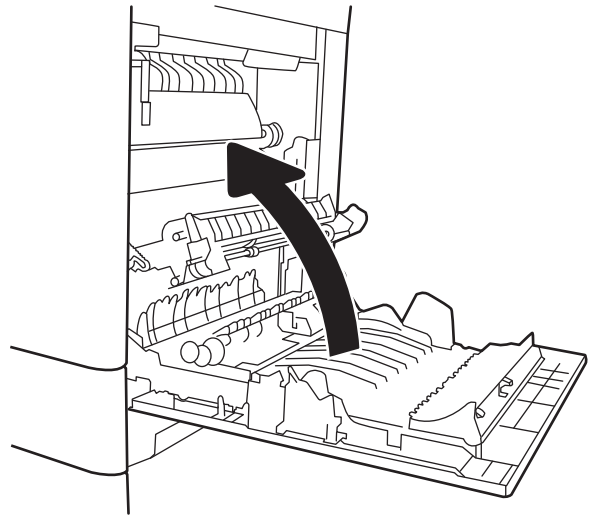


13.A2 tray 2 paper jam


Use the following procedure to check for paper in all possible jam locations related to Tray 2. When a jam occurs, the control panel might display a message and an animation that assists in clearing the jam.

- 13.A2.XX Jam in tray 2


1. Pull the tray completely out of the printer by pulling and lifting it up slightly.

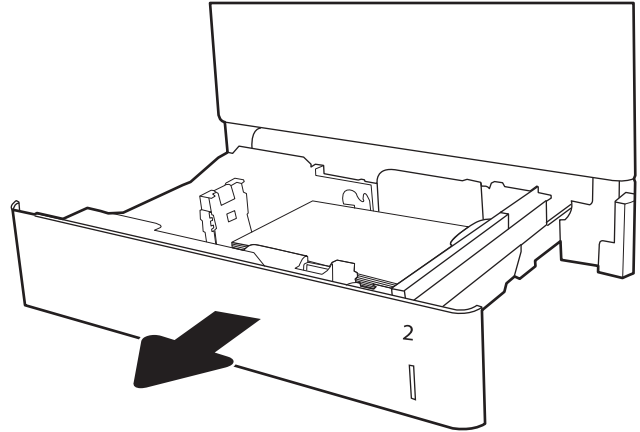


2. Remove any jammed or damaged sheets of paper. Verify that the tray is not overfilled and that the paper guides are adjusted correctly.

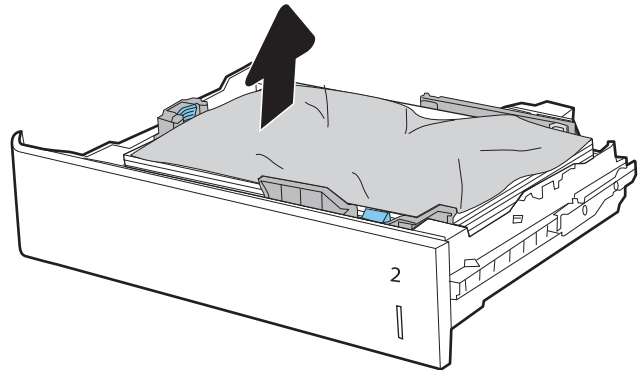


3. Gently remove any paper from the feed rollers inside the printer. First pull the paper to the left to release it, and then pull it forward to remove it.

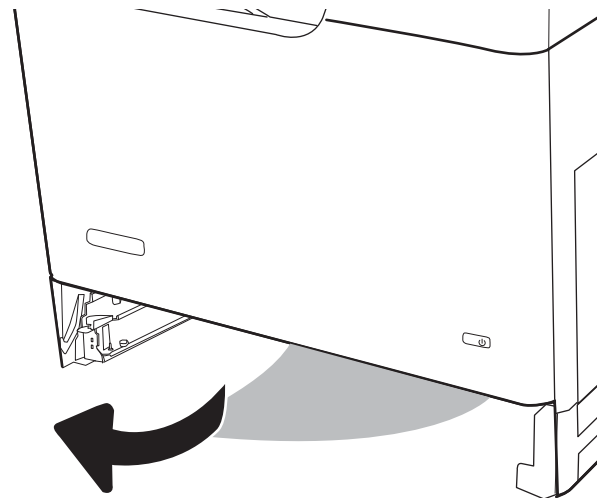


4. Install and close the tray.

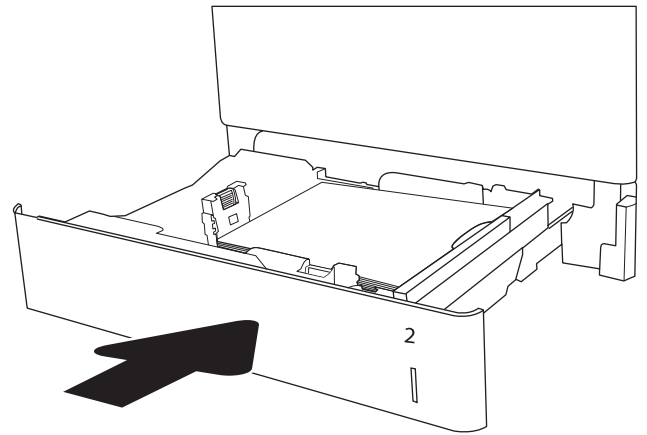

5. Open the right door.

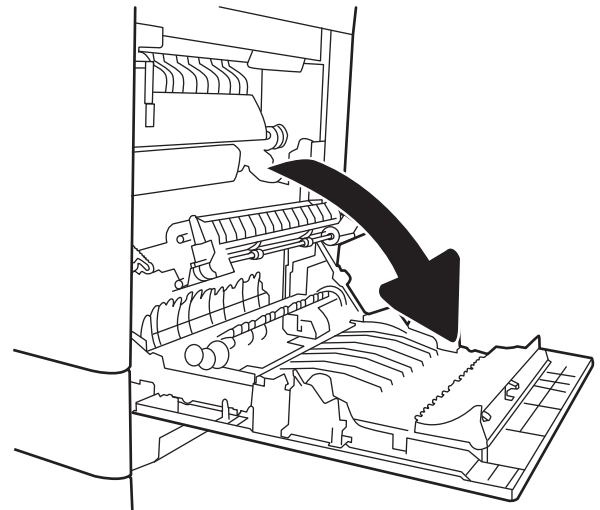


6. Gently pull out any jammed paper.

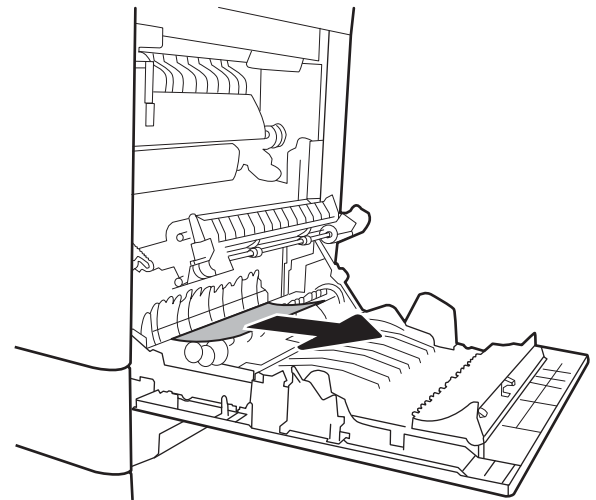


7. If paper is visible entering the bottom of the fuser, gently pull downward to remove it.

CAUTION: Do not touch the rollers on the transfer roller. Contaminants can affect print quality.

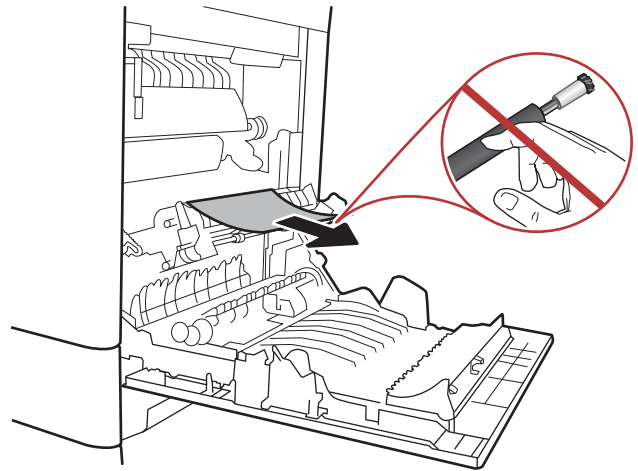


8. If paper is jammed as it enters the output bin, gently pull the paper out to remove it.

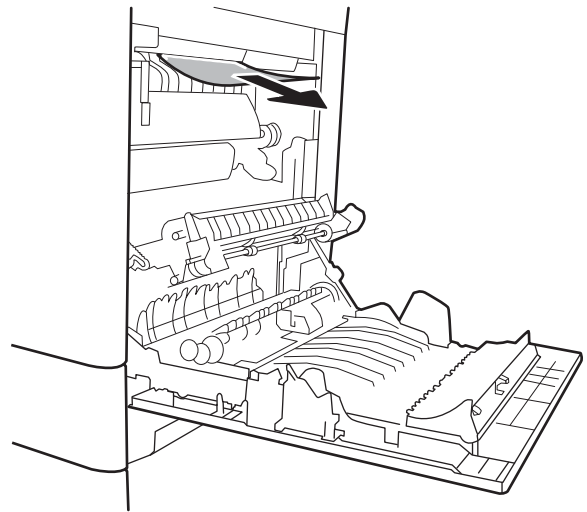

9. Paper could be jammed inside the fuser where it would not be visible. Grasp the fuser handles, lift up slightly, and then pull straight out to remove the fuser.




CAUTION: The fuser can be hot while the printer is in use. Wait for the fuser to cool before handling it.

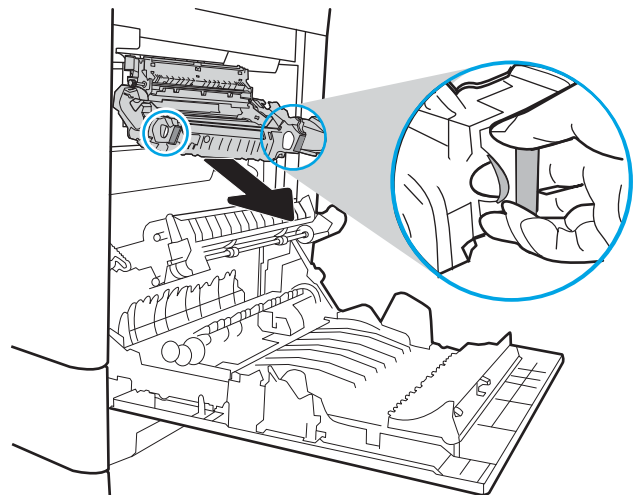


10. Open the jam-access door on the fuser. If paper is jammed inside the fuser, gently pull it straight up to remove it. If the paper tears, remove all paper fragments.




CAUTION: Even if the body of the fuser has cooled, the rollers that are inside could still be hot. Do not touch the fuser rollers until they have cooled.

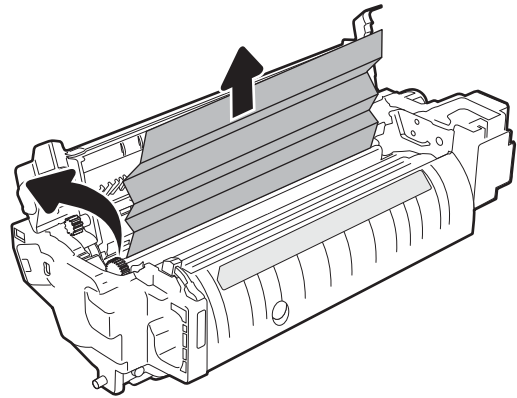

11. Close the jam-access door on the fuser, and push the fuser completely into the printer until it clicks into place.

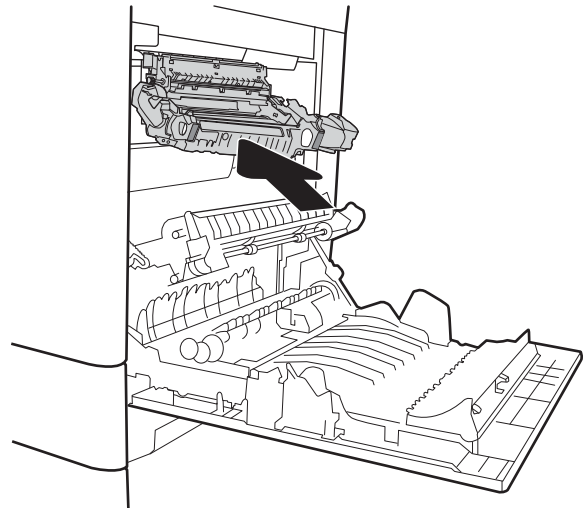

12. Close the right door.

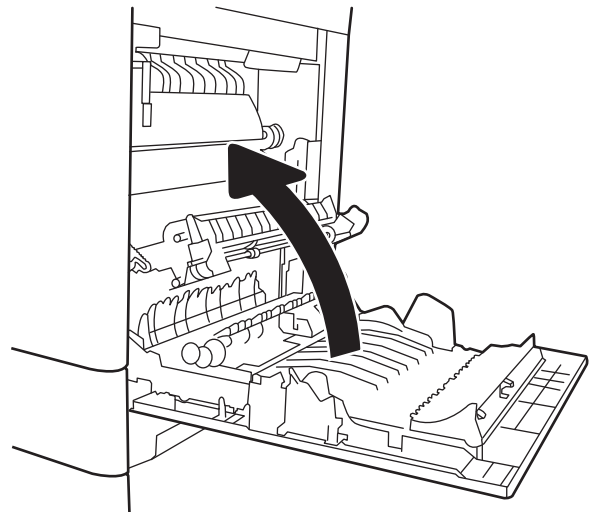


13.A3, 13.A4, 13.A5 tray 3, tray 4, tray 5 paper jam


Use the following procedure to check for paper in all possible jam locations related to the 550-sheet trays. When a jam occurs, the control panel might display a message and an animation that assists in clearing the jam.

- 13.A3.XX Jam in tray 3
- 13.A4.XX Jam in tray 4
- 13.A5.XX Jam in tray 5


1. Pull the tray completely out of the printer by pulling and lifting it up slightly.

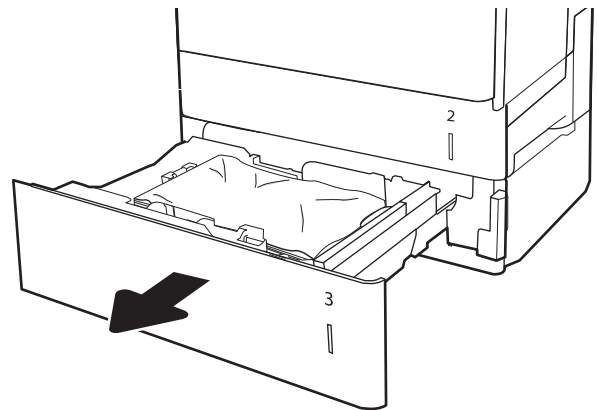


2. Remove any jammed or damaged sheets of paper. Verify that the tray is not overfilled and that the paper guides are adjusted correctly.

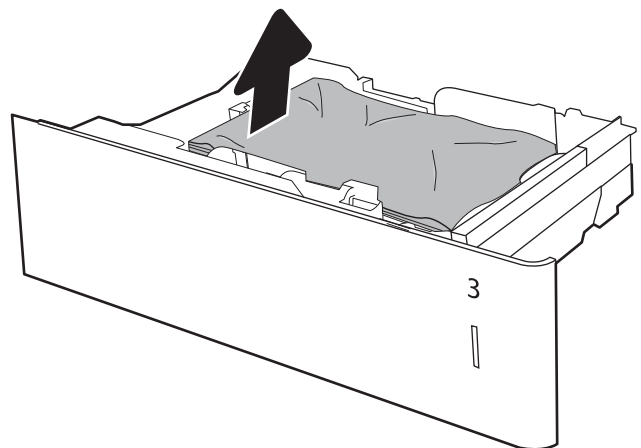


3. Remove any paper from the feed rollers inside the printer. First pull the paper to the left to release it, and then pull it forward to remove it.

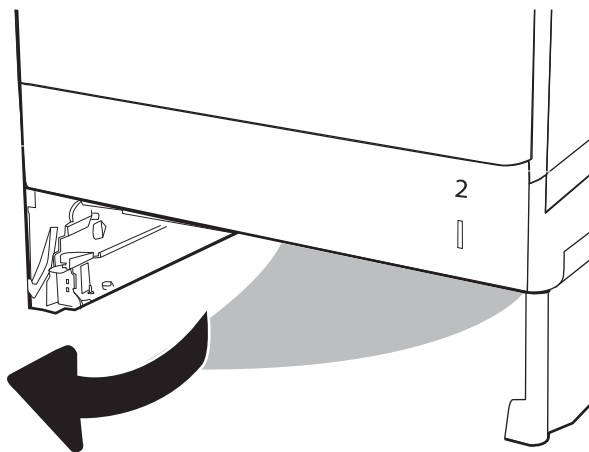


4. Install and close the tray.

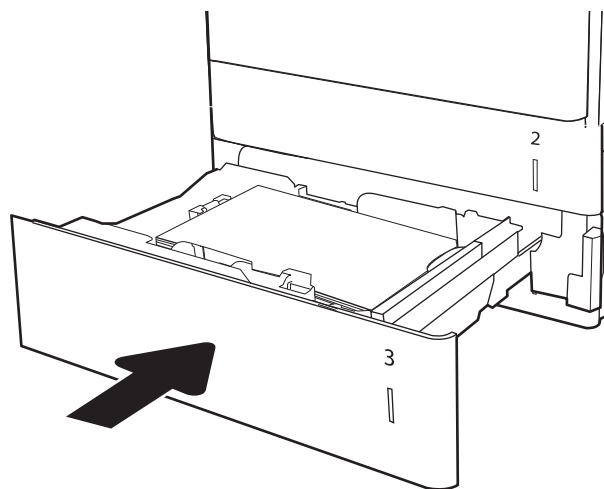


5. Open the lower-right door.

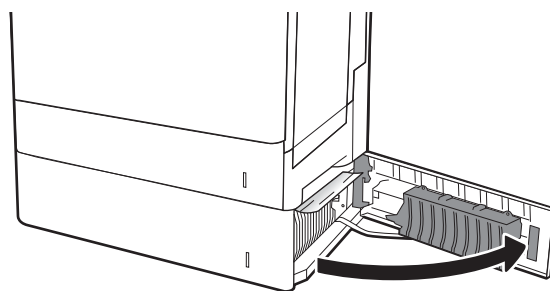


6. Gently pull out any jammed paper.

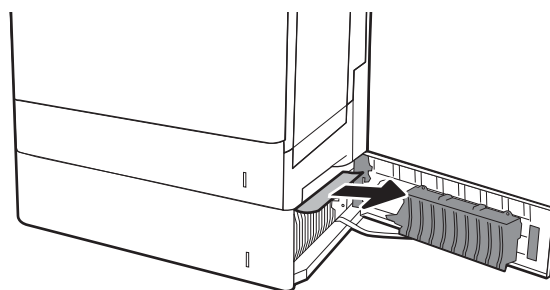


7. Close the lower-right door.

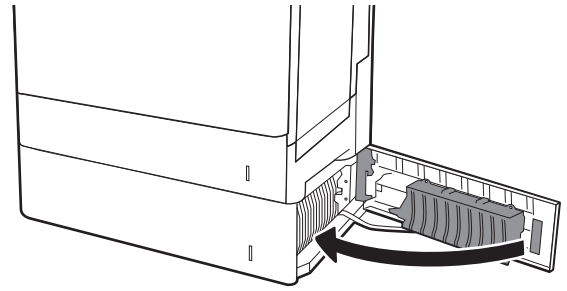

8. Open the right door.

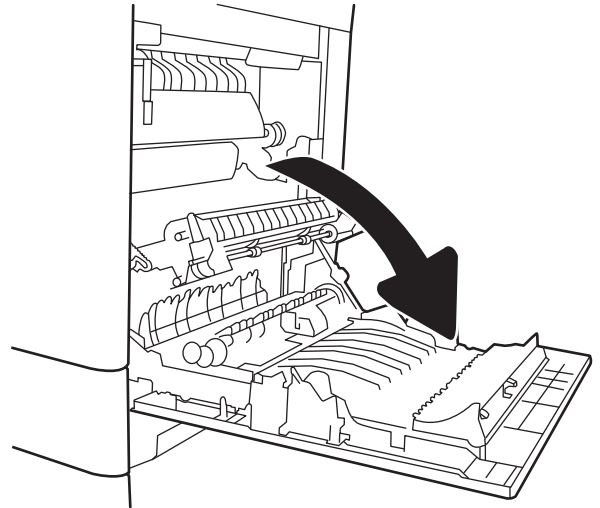


9. Gently pull out any jammed paper.

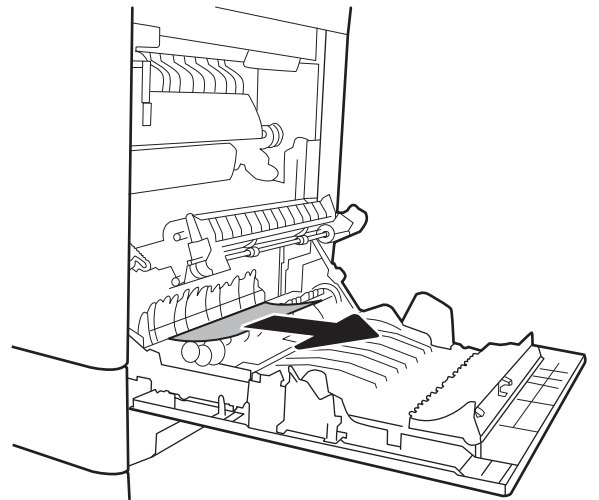


10. If paper is visible entering the bottom of the fuser, gently pull downward to remove it.

CAUTION: Do not touch the rollers on the transfer roller. Contaminants can affect print quality.

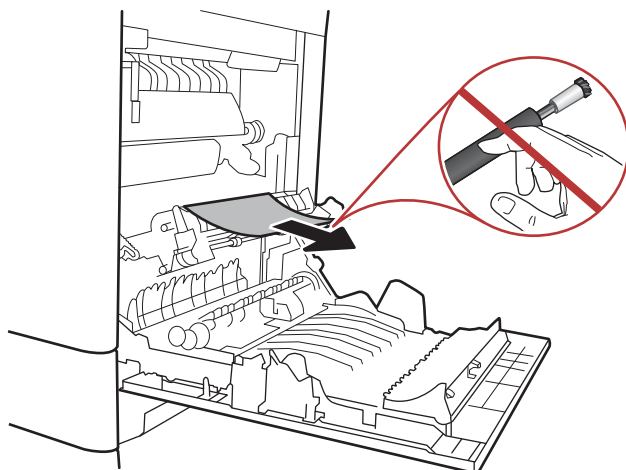


11. If paper is jammed as it enters the output bin, gently pull the paper downward to remove it.

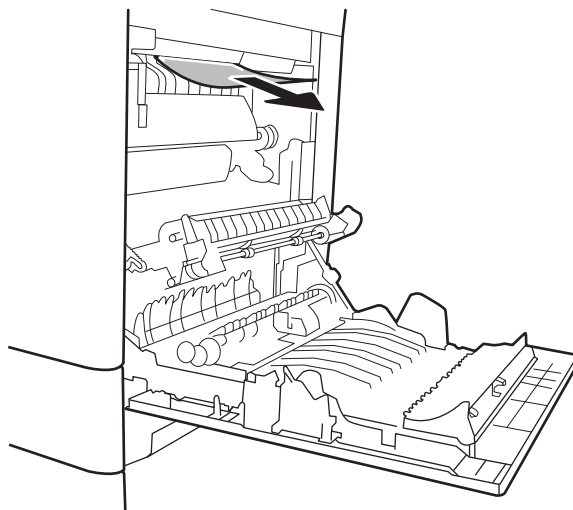

12. Paper could be jammed inside the fuser where it would not be visible. Grasp the fuser handles, lift up slightly, and then pull straight out to remove the fuser.




CAUTION: The fuser can be hot while the printer is in use. Wait for the fuser to cool before handling it.

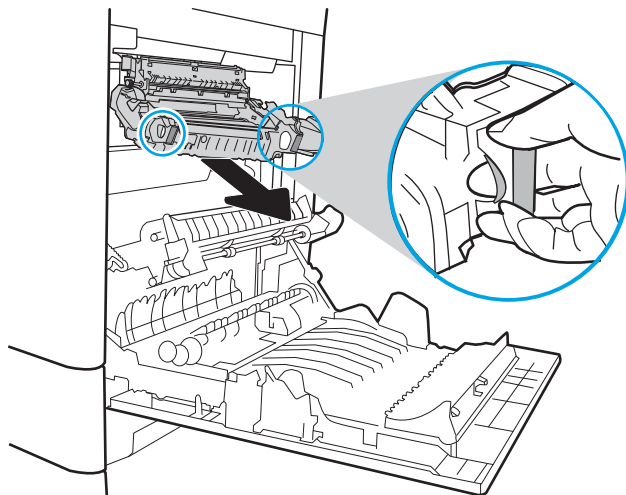


13. Open the jam-access door on the fuser. If paper is jammed inside the fuser, gently pull it straight up to remove it. If the paper tears, remove all paper fragments.




CAUTION: Even if the body of the fuser has cooled, the rollers that are inside could still be hot. Do not touch the fuser rollers until they have cooled.

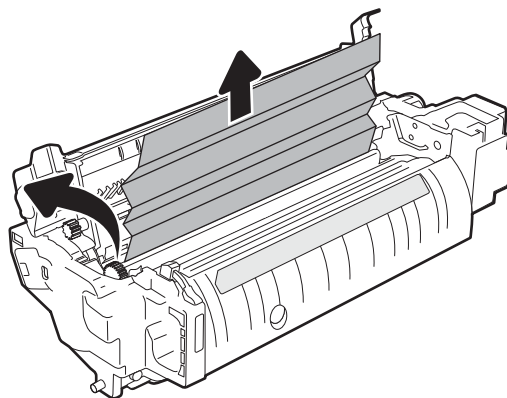

14. Close the jam-access door on the fuser, and push the fuser completely into the printer until it clicks into place.

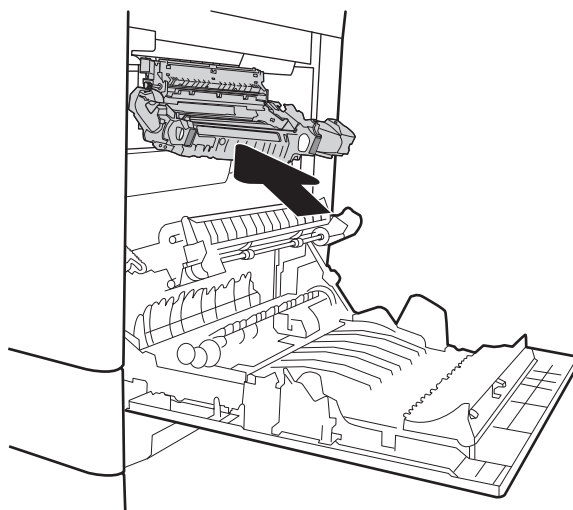

15. Close the right door.

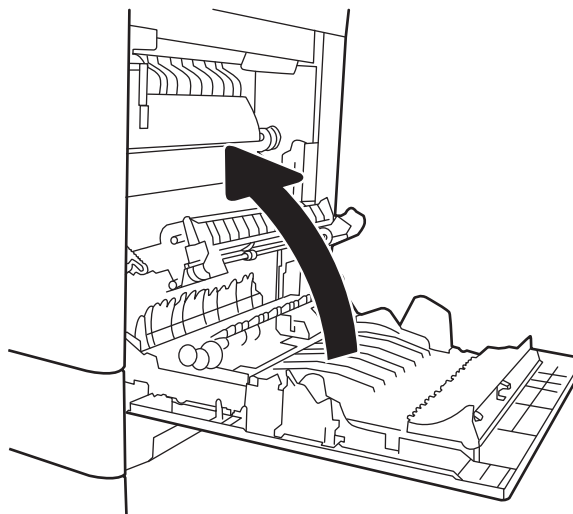


13.A 2000-sheet tray paper jam


Use the following procedure to check for paper in all possible jam locations related to the 2,000-sheet high-capacity tray. When a jam occurs, the control panel might display a message and an animation that assists in clearing the jam.

- 13.A4.XX Jam in tray 4


1. Open the 2,000-sheet high-capacity input tray.

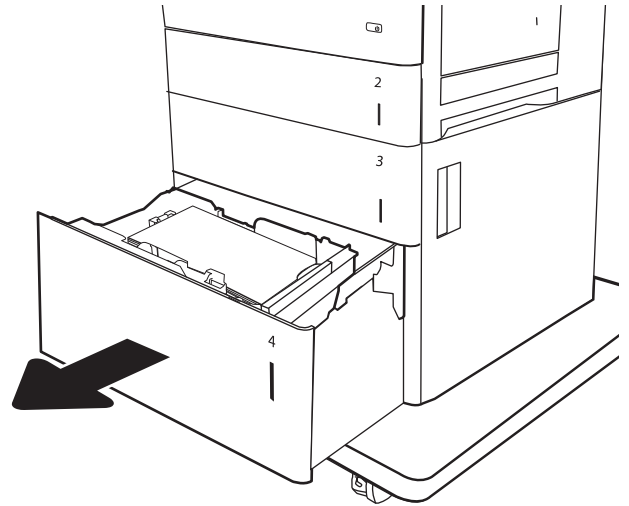


2. Remove any jammed or damaged sheets of paper. Verify that the tray is not overfilled and that the paper guides are adjusted correctly.

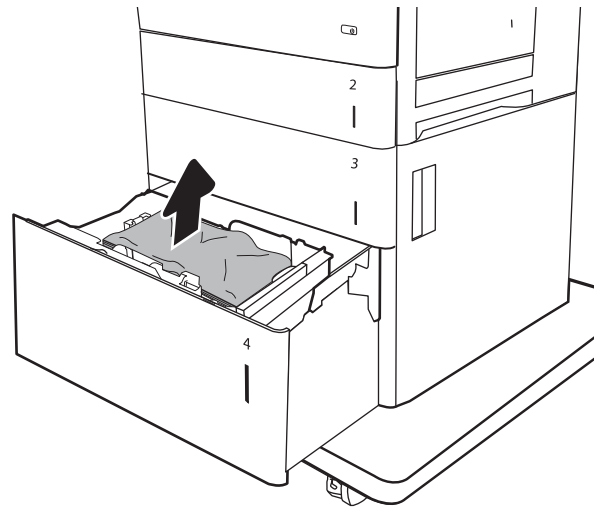


3. Remove the paper from the tray.

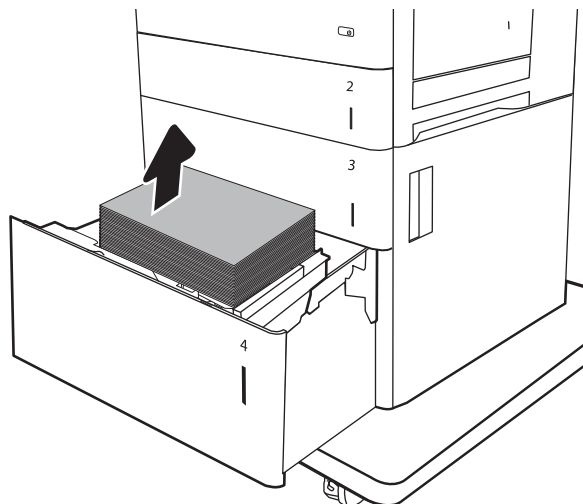


4. Press the release latch on the side of the tray to release it.

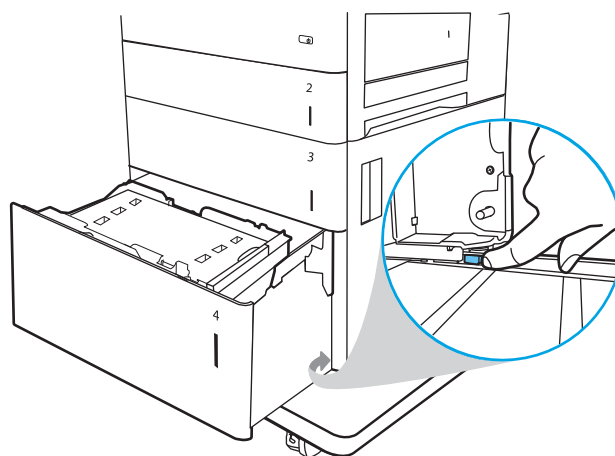

5. Lift the tray up and then pull it straight out to remove it.

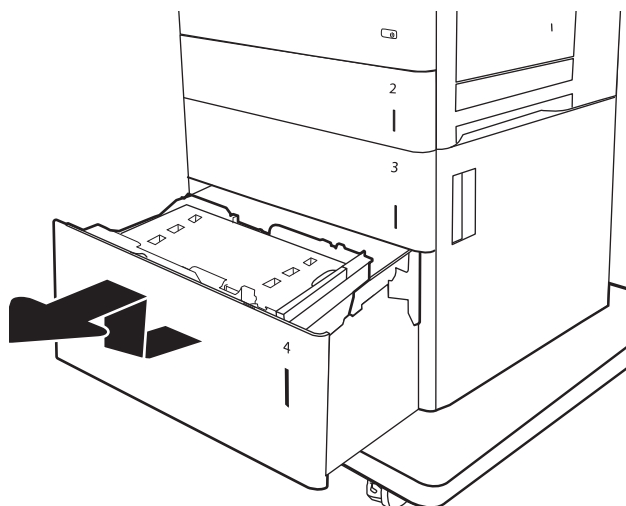


6. If jammed paper is in the feed area, pull it down to remove it. First pull the paper to the left to release it, and then pull it forward to remove it.

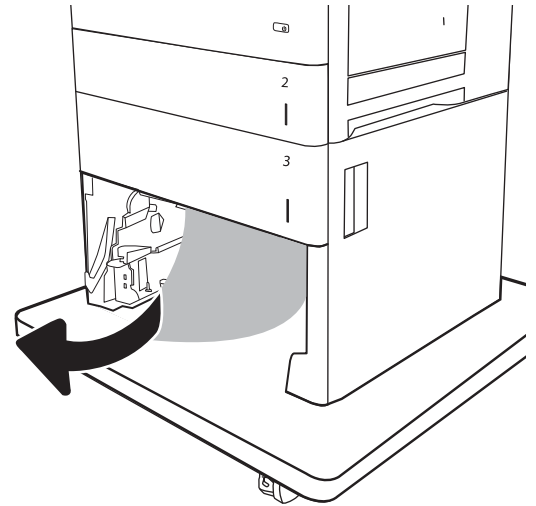


7. Install the tray, and then load full reams of paper into the tray. Verify that the tray is not overfilled and that the paper guides are adjusted correctly.


NOTE: The tray holds 2,000 sheets of paper. For best results, load full reams of paper. Avoid dividing reams into smaller sections.

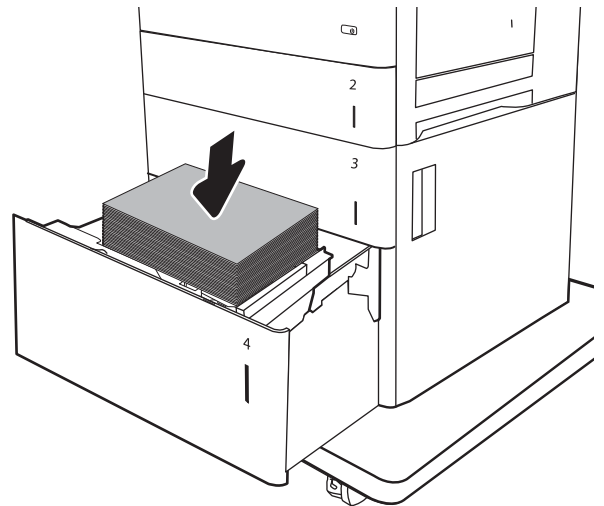


8. Close the tray.

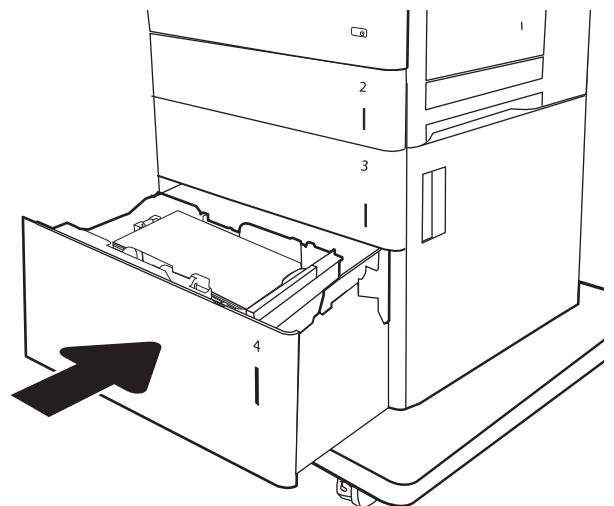

9. Open the lower-right door.

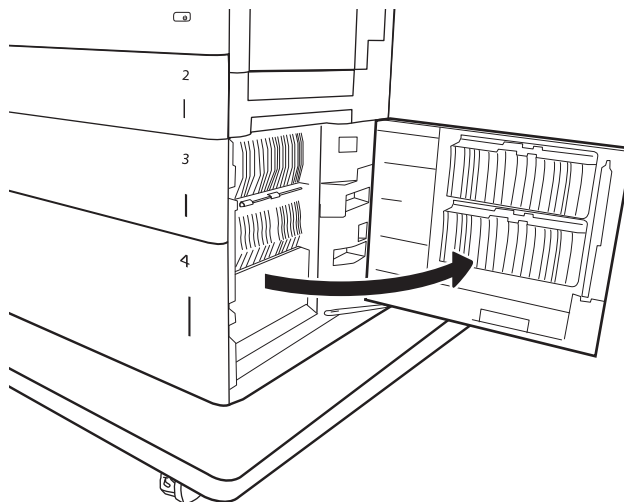


10. Remove any jammed paper.

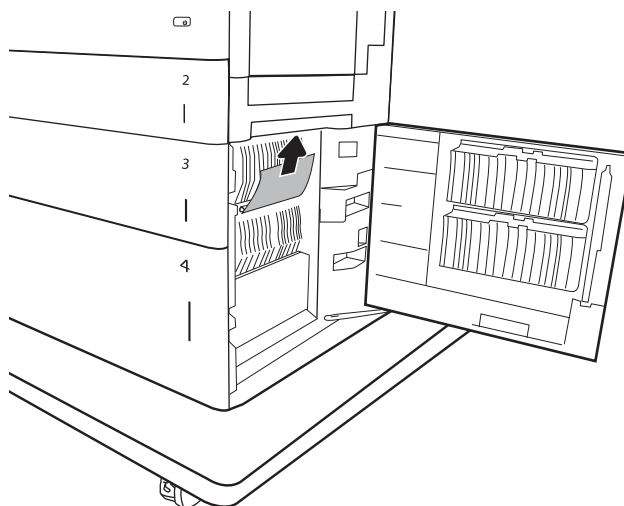

11. Close the lower-right door.

NOTE: If, after clearing the jam, the printer control panel displays a message that there is no paper in the tray or the tray is overfilled, remove the tray and look behind it for any remaining paper.

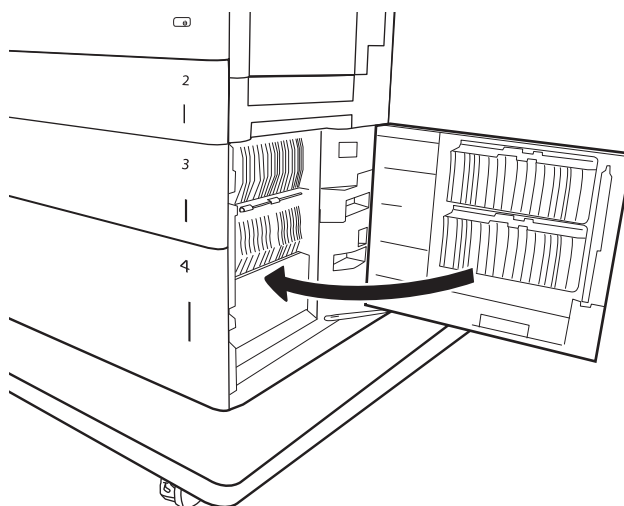

13.B9, 13.B2, 13.FF fuser paper jam


Use the following procedure to check for paper in all possible jam locations inside the right door. When a jam occurs, the control panel might display a message and an animation that assists in clearing the jam.

- 13.B9.XX Jam in fuser
- 13.B2.XX Jam in <Cover or Door>.
- 13.FF.EE Door Open Jam




CAUTION: The fuser can be hot while the printer is in use. Wait for the fuser to cool before handling it.

1. Open the right door.

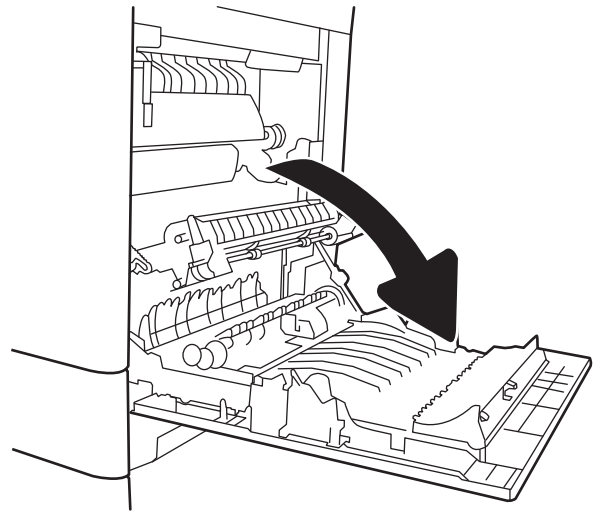


2. Gently pull out any jammed paper.

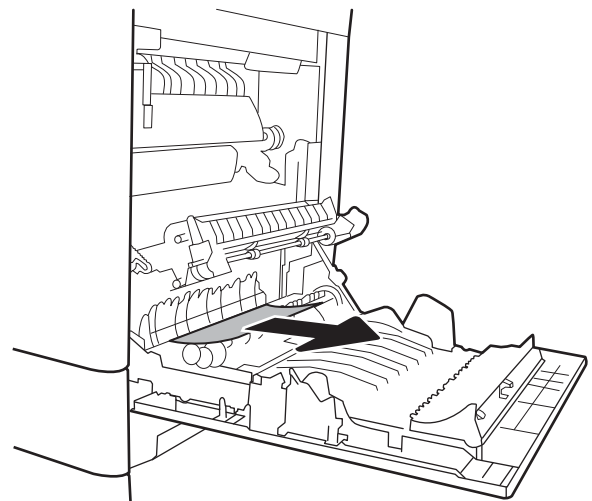


3. If paper is visible entering the bottom of the fuser, gently pull downward to remove it.

CAUTION: Do not touch the rollers on the transfer roller. Contaminants can affect print quality.

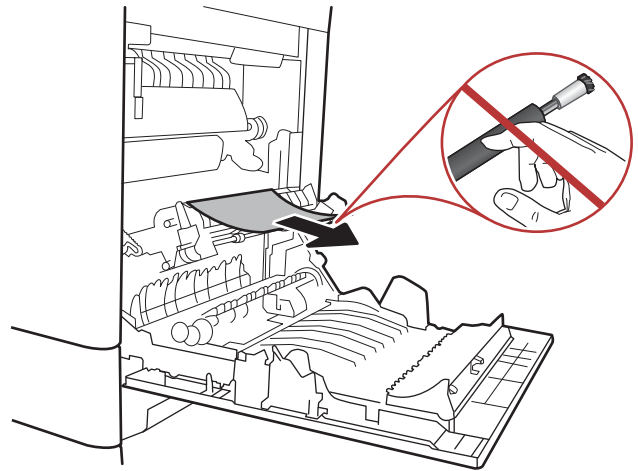


4. If paper is jammed as it enters the output bin, gently pull the paper downward to remove it.

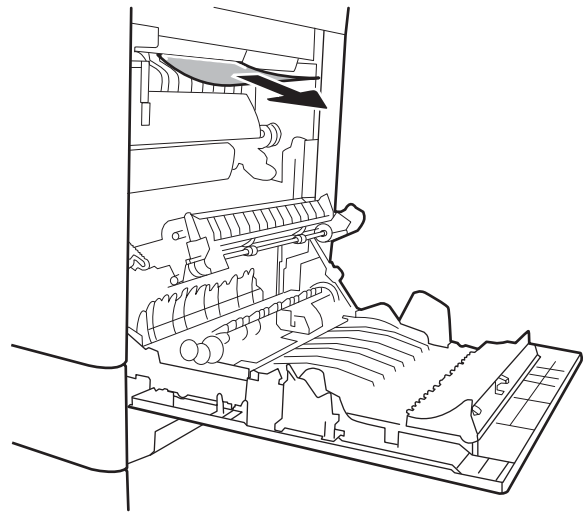

5. Paper could be jammed inside the fuser where it would not be visible. Grasp the fuser handles, lift up slightly, and then pull straight out to remove the fuser.




CAUTION: The fuser can be hot while the printer is in use. Wait for the fuser to cool before handling it.

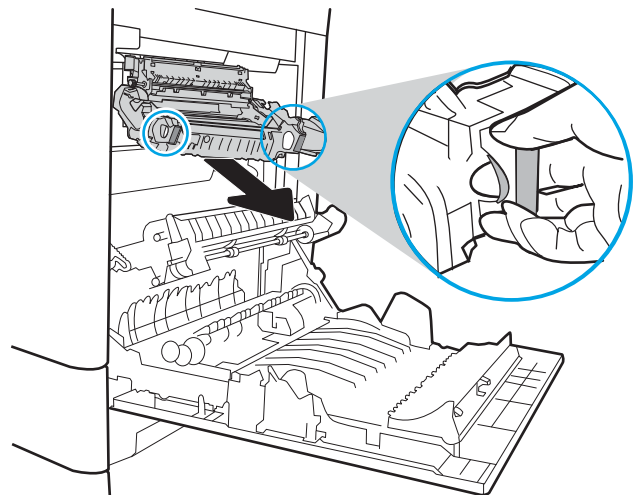


6. Open the jam-access door on the fuser. If paper is jammed inside the fuser, gently pull it straight up to remove it. If the paper tears, remove all paper fragments.




CAUTION: Even if the body of the fuser has cooled, the rollers that are inside could still be hot. Do not touch the fuser rollers until they have cooled.

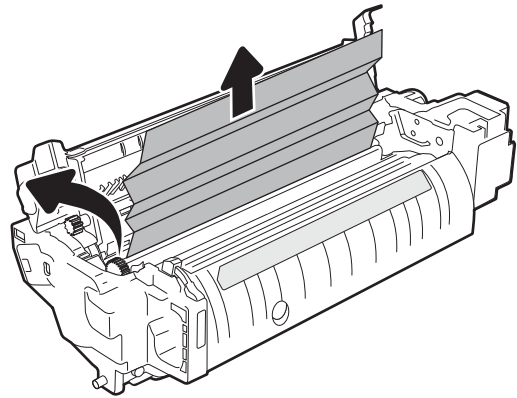

7. Close the jam-access door on the fuser, and push the fuser completely into the printer until it clicks into place.

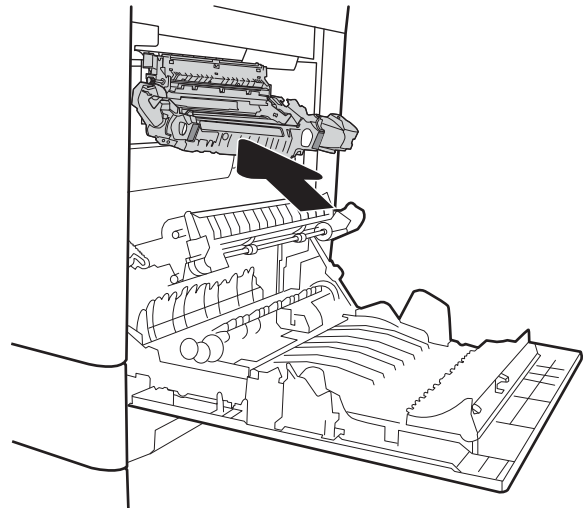

8. Close the right door.

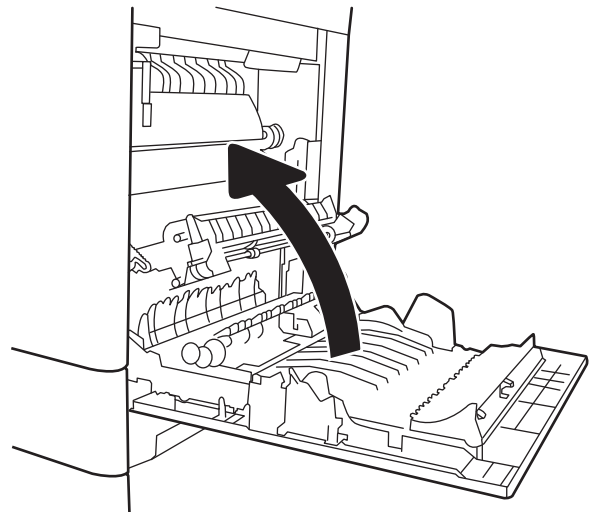


Clear jams in the output bin

Use the following procedure to clear jams in the output bin. When a jam occurs, the control panel might display a message and an animation that assists in clearing the jam.

- **13.E1.XX Jam at standard output bin**

1. If paper is visible in the output bin, grasp the leading edge and gently remove it.

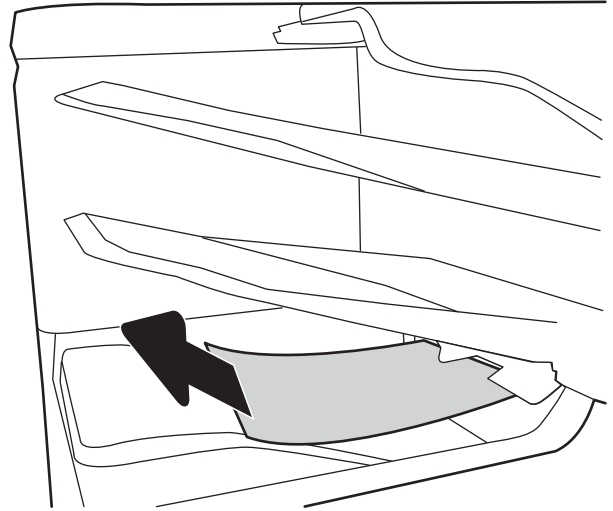


13.70.stapler/stacker paper jam


Use the following procedure to check for paper in the 3-bin stapler/stacker. When a jam occurs, the control panel might display a message and an animation that assists in clearing the jam.

- **13.70.xx Jam in at 3-bin stapler/stacker**


1. Gently remove any jammed paper from the stapler/stacker bins.

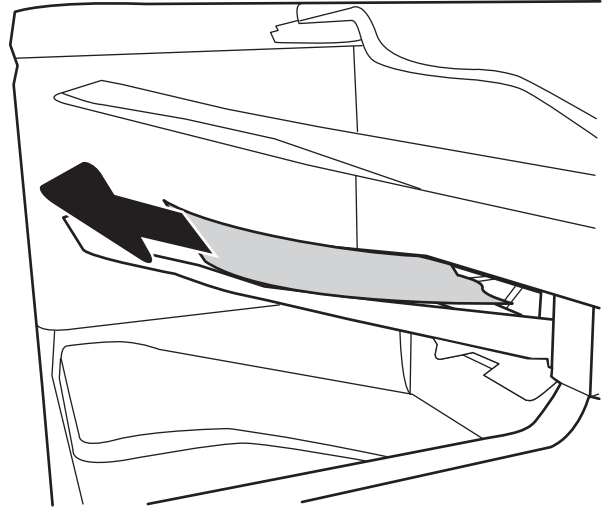


2. Open the stapler/stacker-right door.

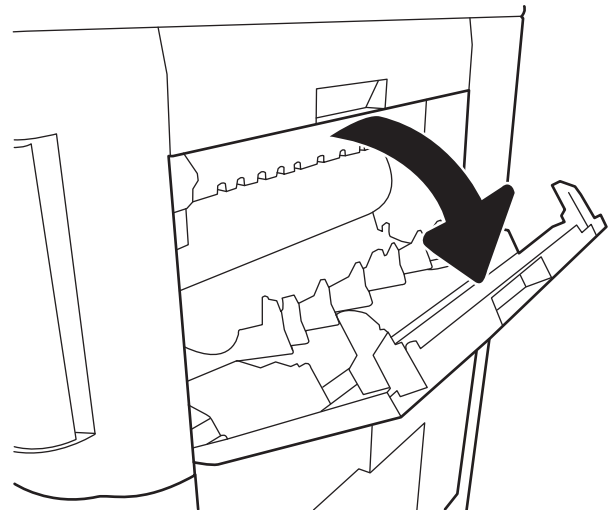

3. If jammed paper is visible, gently pull it straight out.

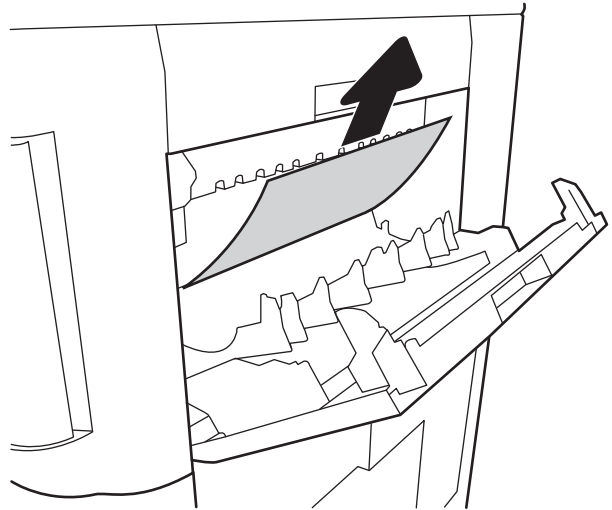


4. Close the stapler/stacker-right door.

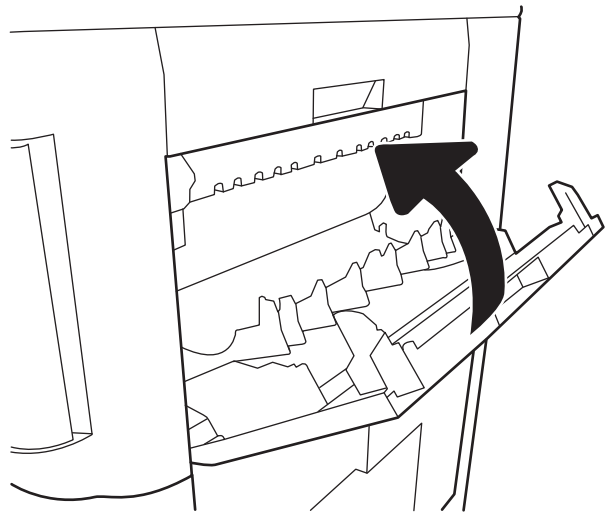


Clear staple jams in the 3-bin stapler/stacker

Use the following procedure to check for staples jammed in the 3-bin stapler/stacker. When a jam occurs, the control panel displays an animation that assists in clearing the jam.


1. Open the staple-cartridge door.

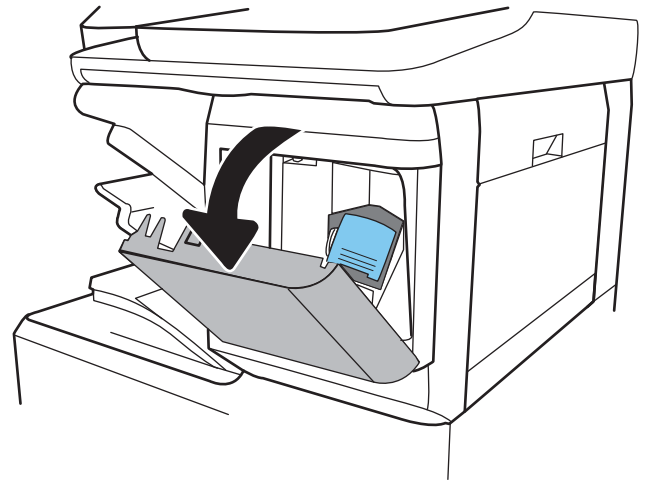


2. Grasp the colored tab on the staple cartridge, and then pull the staple cartridge straight out.

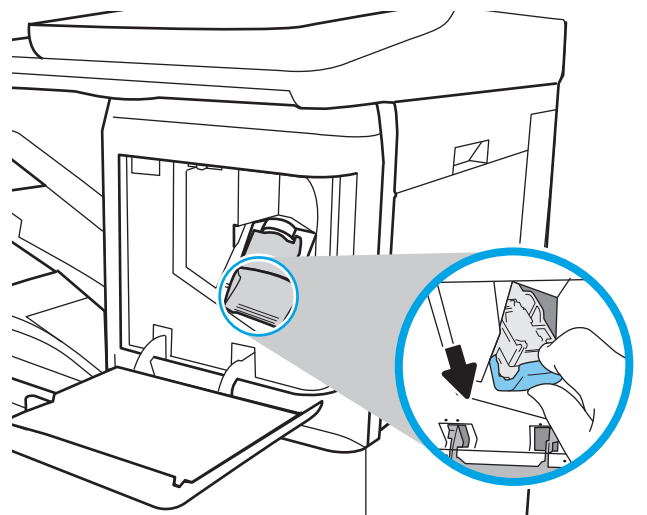


3. Lift up on the small lever at the back of the staple cartridge. Remove the jammed staples.

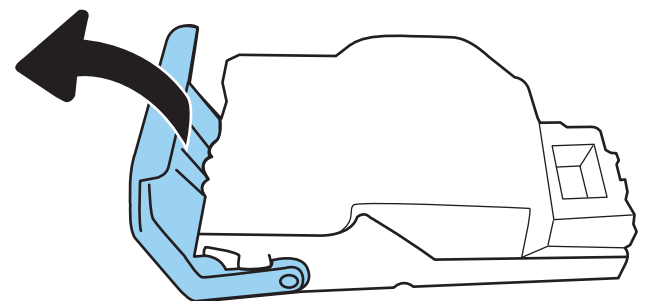


4. Close the lever at the back of the staple cartridge. Be sure that it snaps into place.

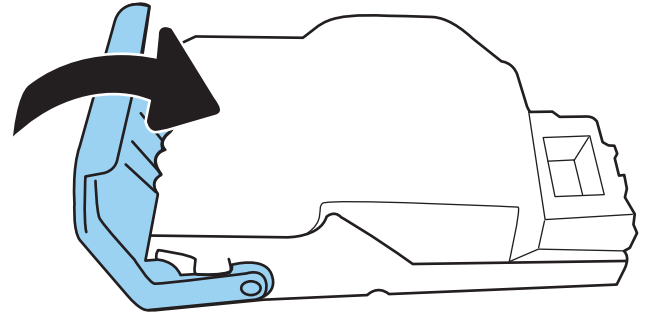

5. Insert the staple cartridge into the stapler and press the colored handle toward the printer until it snaps into place.

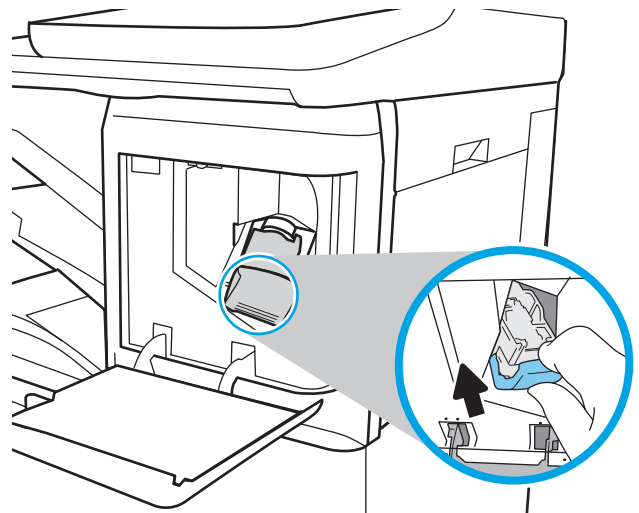


6. Close the staple-cartridge door.

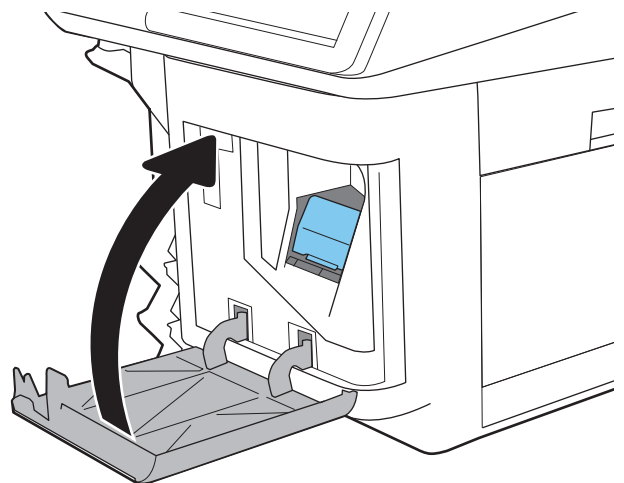


Change jam recovery

This printer provides a jam recovery feature that reprints jammed pages.


Change jam recovery from a touchscreen control panel

1. From the Home screen on the printer control panel, scroll to and touch the [Settings](#) button.
 2. Open the [General](#) menu, and then open the [Jam Recovery](#) menu.
 3. Select one of the following options:
 - [Automatic](#) — The printer attempts to reprint jammed pages when sufficient memory is available. This is the default setting.
 - [Off](#) — The printer does not attempt to reprint jammed pages. Because no memory is used to store the most recent pages, performance is optimal.
-
-  **NOTE:** Some pages can be lost if the printer runs out of paper while printing a duplex job with Jam Recovery set to [Off](#).
-
- [On](#) — The printer always reprints jammed pages. Additional memory is allocated to store the last few pages printed.

Change jam recovery from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the down arrow ▼ button to scroll to [Settings](#), and then press the [OK](#) button.
 2. Use the down arrow ▼ button to scroll to [General](#), and then press the [OK](#) button.
 3. Use the down arrow ▼ button to scroll to [Jam Recovery](#), and then press the [OK](#) button.
 4. Use the down arrow ▼ button to scroll to an option, and then press the [OK](#) button to select it.
 - [Automatic](#) — The printer attempts to reprint jammed pages when sufficient memory is available. This is the default setting.
 - [Off](#) — The printer does not attempt to reprint jammed pages. Because no memory is used to store the most recent pages, performance is optimal.
-
-  **NOTE:** Some pages can be lost if the printer runs out of paper while printing a duplex job with Jam Recovery set to [Off](#).
-
- [On](#) — The printer always reprints jammed pages. Additional memory is allocated to store the last few pages printed.

Solve performance problems

 **NOTE:** Tray 1 and Tray 2 are optimal for paper pickup when using special paper or media other than 20lb plain paper. For Tray 1 and Tray 2 the printer increases the number of attempts to pick up a page, which increases the reliability of successfully picking the page from the tray and decreases the possibility of a mis-pick jam.

HP recommends using Tray 1 or Tray 2 if the printer is experiencing excessive or reoccurring jams from trays other than Tray 1 and Tray 2, or for print jobs that require media other than 20lb plain paper.

- [Factors affecting print performance](#)
- [Print speeds](#)
- [The printer does not print or it prints slowly](#)

Factors affecting print performance

Table 2-76 Solve performance problems

| Problem | Cause | Solution |
|------------------------------------|---|---|
| Pages print but are totally blank. | The document might contain blank pages. | Check the original document to see if content is present on all of the pages. |
| | The printer might be malfunctioning. | To check the printer, print a Configuration page. |
| Pages print very slowly. | Heavier paper types can slow the print job. | Print on a different type of paper. |
| | Complex pages can print slowly. | Proper fusing might require a slower print speed to ensure the best print quality. |
| | Large batches, narrow paper, and special paper such as gloss, transparency, cardstock, and HP Tough Paper can slow the print job. | Print in smaller batches, on a different type of paper, or on a different size of paper. |
| Pages did not print. | The printer might not be pulling paper correctly. | Make sure paper is loaded in the tray correctly. |
| | The paper is jamming in the printer. | Clear the jam. |
| | The USB cable might be defective or incorrectly connected. | <ul style="list-style-type: none">• Disconnect the USB cable at both ends and reconnect it.• Try printing a job that has printed in the past.• Try using a different USB cable. |
| | Other devices are running on the host computer. | The printer might not share a USB port. If an external hard drive or network switchbox is connected to the same port as the printer, the other device might be interfering with the printer. To connect and use the printer, disconnect the other device or use two USB ports on the host computer. |

Print speeds

Print speed is the number of pages that print in one minute. Print speed depends on different engine-process speeds or operational pauses between printed pages during normal printer operation. Factors that determine the print speed of the printer include the following:

- Page formatting time

The printer must pause for each page to be formatted before it prints. Complex pages take more time to format, resulting in reduced print speed. However, most jobs print at full engine speed.

- Media size

Legal-size media reduces print speed because it is longer than the standard Letter- or A4-size media. A reduce print speed is used when printing on narrow media to prevent the edges of the fuser from overheating.

- Media mode

Some media types require a reduced print speed to achieve maximum print quality on that media. For example, glossy, heavy, and specialty media (for example, envelopes or photos) require a reduced print speed. To maximize the print speed for special media types, make sure that the correct media type in the print driver is selected.

- Printer temperature

To prevent printer damage, print speed is reduced if the printer reaches a specific internal temperature (thermal slow down). The starting temperature of the printer, ambient environment temperature, and the print job size effect the number of pages that can be printed before the printer reduces the print speed. Thermal slow down reduces print speed by printing four pages and then pausing for an amount of time before printing continues.

- Other print speed reduction factors

Other factors (especially during large print jobs) that can cause reduced print speeds include:

- Density control sequence; occurs every 150 pages and takes about 120 seconds

The printer does not print or it prints slowly

The printer prints slowly

The printer prints slowly

If the printer prints, but it seems slow, try the following solutions.

1. Make sure the computer meets the minimum specifications for this printer. For a list of specifications, go to this Web site: www.hp.com/support/colorljM652, www.hp.com/support/colorljM653, www.hp.com/support/colorljE65050, www.hp.com/support/colorljE65060, www.hp.com/support/colorljE65150, www.hp.com/support/colorljE65160, www.hp.com/support/colorljM681MFP, www.hp.com/support/

[colorljM682MFP](#), [www.hp.com/support/colorljE67550MFP](#), [www.hp.com/support/colorljE67560MFP](#), [www.hp.com/support/colorljE67650MFP](#), or [www.hp.com/support/colorljE67660MFP](#).

2. When the printer is configured to print on some paper types, such as heavy paper, the printer prints more slowly so it can correctly fuse the toner to the paper. If the paper type setting is not correct for the type of paper you are using, change the setting to the correct paper type.
3. If the host computer or the printer is connected to a wireless network, low signal quality or interference might be delaying print jobs.

The printer does not print

If the printer does not print at all, try the following solutions.

1. Make sure the printer is turned on and that the control panel indicates it is ready.
 - If the control panel does not indicate the printer is ready, turn the printer off and then on again.
 - If the control panel indicates the printer is ready, try sending the job again.
2. If the control panel indicates the printer has an error, resolve the error and then try sending the job again.
3. Make sure the cables are all connected correctly. If the printer is connected to a network, check the following items:
 - Check the bottom LED next to the network connection on the printer. If the network is active, the light is green.
 - Make sure that a network cable and not a phone cord is used to connect to the network.
 - Make sure the network router, hub, or switch is turned on and that it is working correctly.
4. Install the HP software from the CD that came with the printer. Using generic printer drivers can cause delays clearing jobs from the print queue.
5. From the list of printers on your computer, right-click the name of this printer, click **Properties**, and open the **Ports** tab.
 - If a network cable is used to connect to the network, make sure the printer name listed on the **Ports** tab matches the printer name on the printer configuration page.
 - If a USB cable is used, and the printer is connected to a wireless network, make sure the box is checked next to **Virtual printer port for USB**.
6. If a personal firewall system on the computer is used, it might be blocking communication with the printer. Try temporarily disabling the firewall to see if it is the source of the problem.
7. If the host computer or the printer is connected to a wireless network, low signal quality or interference might be delaying print jobs.

Solve wired network problems

Introduction

Certain types of problems can indicate there is a network communication problem. These problems include the following issues:

- The periodic loss of ability to communicate with the printer
- The printer cannot be found during driver installation
- A periodic failure to print

Check the following items to verify that the printer is communicating with the network. Before beginning, print a configuration page from the printer control panel and locate the printer IP address that is listed on this page.

- [Poor physical connection](#)
- [The computer is using the incorrect IP address for the printer](#)
- [The computer is unable to communicate with the printer](#)
- [The printer is using incorrect link and duplex settings for the network](#)
- [New software programs might be causing compatibility problems](#)
- [The computer or workstation might be set up incorrectly](#)
- [The printer is disabled, or other network settings are incorrect](#)



NOTE: HP does not support peer-to-peer networking, as the feature is a function of Microsoft operating systems and not of the HP print drivers. For more information, go to Microsoft at www.microsoft.com.

Poor physical connection

1. Verify that the printer is attached to the correct network port using a cable of the correct length.
2. Verify that cable connections are secure.
3. Look at the network port connection on the back of the printer, and verify that the amber activity light flashes indicating network traffic, and the green link-status light is continuously lit indicating a network link.
4. If the problem continues, try a different cable or port on the hub.

The computer is using the incorrect IP address for the printer

1. Open the printer properties and click the **Ports** tab. Verify that the current IP address for the printer is selected. The printer IP address is listed on the printer configuration page.
2. If you installed the printer using the HP standard TCP/IP port, select the box labeled **Always print to this printer, even if its IP address changes**.
3. If you installed the printer using a Microsoft standard TCP/IP port, use the hostname instead of the IP address.
4. If the IP address is correct, delete the printer and then add it again.

The computer is unable to communicate with the printer

1. Test network communication by pinging the network.
 - a. Open a command-line prompt on your computer.
 - For Windows, click **Start**, click **Run**, type `cmd`, and then press **Enter**.
 - For OS X, go to **Applications**, then **Utilities**, and open **Terminal**.
 - b. Type `ping` followed by the IP address for your printer.
 - c. If the window displays round-trip times, the network is working.
2. If the ping command failed, verify that the network hubs are on, and then verify that the network settings, the printer, and the computer are all configured for the same network.

The printer is using incorrect link and duplex settings for the network

HP recommends leaving these settings in automatic mode (the default setting). If you change these settings, you must also change them for your network.

New software programs might be causing compatibility problems

Verify that any new software programs are correctly installed and that they use the correct print driver.

The computer or workstation might be set up incorrectly

1. Check the network drivers, print drivers, and the network redirection settings.
2. Verify that the operating system is configured correctly.

The printer is disabled, or other network settings are incorrect

1. Review the configuration page to check the status of the network protocol. Enable it if necessary.
2. Reconfigure the network settings if necessary.

Solve wireless network problems

- [Introduction](#)
- [Wireless connectivity checklist](#)
- [The printer does not print after the wireless configuration completes](#)
- [The printer does not print, and the computer has a third-party firewall installed](#)
- [The wireless connection does not work after moving the wireless router or printer](#)
- [Cannot connect more computers to the wireless printer](#)
- [The wireless printer loses communication when connected to a VPN](#)
- [The network does not appear in the wireless networks list](#)
- [The wireless network is not functioning](#)
- [Reduce interference on a wireless network](#)

Introduction

Use the troubleshooting information to help resolve issues.



NOTE: To determine whether Wireless Print Direct printing is enabled on your printer, print a configuration page from the printer control panel

Wireless connectivity checklist

- Verify that the network cable is not connected.
- Verify that the printer and the wireless router are turned on and have power. Also make sure that the wireless radio in the printer is turned on.
- Verify that the service set identifier (SSID) is correct. Print a configuration page to determine the SSID. If you are not sure the SSID is correct, run the wireless setup again.
- With secured networks, verify that the security information is correct. If the security information is incorrect, run the wireless setup again.
- If the wireless network is working correctly, try accessing other computers on the wireless network. If the network has Internet access, try connecting to the Internet over a wireless connection.
- Verify that the encryption method (AES or TKIP) is the same for the printer as it is for the wireless access point (on networks using WPA security).
- Verify that the printer is within the range of the wireless network. For most networks, the printer must be within 30 m (100 ft) of the wireless access point (wireless router).
- Verify that obstacles do not block the wireless signal. Remove any large metal objects between the access point and the printer. Make sure poles, walls, or support columns containing metal or concrete do not separate the printer and wireless access point.
- Verify that the printer is located away from electronic devices that might interfere with the wireless signal. Many devices can interfere with the wireless signal including motors, cordless phones, security system cameras, other wireless networks, and some Bluetooth devices.

- Verify that the print driver is installed on the computer.
- Verify that you have selected the correct printer port.
- Verify that the computer and printer connect to the same wireless network.
- For OS X, verify that the wireless router supports Bonjour.

The printer does not print after the wireless configuration completes

1. Make sure that the printer is turned on and in the ready state.
2. Turn off any third-party firewalls on your computer.
3. Make sure that the wireless network is working correctly.
4. Make sure that your computer is working correctly. If necessary, restart the computer.
5. Verify that you can open the printer HP Embedded Web Server from a computer on the network.

The printer does not print, and the computer has a third-party firewall installed

1. Update the firewall with the most recent update available from the manufacturer.
2. If programs request firewall access when you install the printer or try to print, make sure you allow the programs to run.
3. Temporarily turn off the firewall, and then install the wireless printer on the computer. Enable the firewall when you have completed the wireless installation.

The wireless connection does not work after moving the wireless router or printer

1. Make sure that the router or printer connects to the same network that your computer connects to.
2. Print a configuration page.
3. Compare the service set identifier (SSID) on the configuration page to the SSID in the printer configuration for the computer.
4. If the numbers are not the same, the devices are not connecting to the same network. Reconfigure the wireless setup for the printer.

Cannot connect more computers to the wireless printer

1. Make sure that the other computers are within the wireless range and that no obstacles block the signal. For most networks, the wireless range is within 30 m (100 ft) of the wireless access point.
2. Make sure that the printer is turned on and in the ready state.
3. Make sure there are not more than 5 concurrent Wireless Print Direct users.
4. Turn off any third-party firewalls on your computer.
5. Make sure that the wireless network is working correctly.
6. Make sure that your computer is working correctly. If necessary, restart the computer.

The wireless printer loses communication when connected to a VPN

- Typically, you cannot connect to a VPN and other networks at the same time.

The network does not appear in the wireless networks list

- Make sure the wireless router is turned on and has power.
- The network might be hidden. However, you can still connect to a hidden network.

The wireless network is not functioning

1. Make sure that the network cable is not connected.
2. To verify if the network has lost communication, try connecting other devices to the network.
3. Test network communication by pinging the network.
 - a. Open a command-line prompt on your computer.
 - For Windows, click **Start**, click **Run**, type `cmd`, and then press [Enter](#).
 - For OS X, go to **Applications**, then **Utilities**, and open **Terminal**.
 - b. Type `ping` followed by the router IP address.
 - c. If the window displays round-trip times, the network is working.
4. Make sure that the router or printer connects to the same network that the computer connects to.
 - a. Print a configuration page.
 - b. Compare the service set identifier (SSID) on the configuration report to the SSID in the printer configuration for the computer.
 - c. If the numbers are not the same, the devices are not connecting to the same network. Reconfigure the wireless setup for the printer.

Reduce interference on a wireless network

The following tips can reduce interference in a wireless network:

- Keep the wireless devices away from large metal objects, such as filing cabinets, and other electromagnetic devices, such as microwaves and cordless telephones. These objects can disrupt radio signals.
- Keep the wireless devices away from large masonry structures and other building structures. These objects can absorb radio waves and lower signal strength.
- Position the wireless router in a central location in line of sight with the wireless printers on the network.

Service mode functions

- [Service menu](#)
- [Printer resets](#)
- [Format Disk and Partial Clean functions](#)

Service menu

The [Service](#) menu is PIN-protected for added security. Only authorized service people have access to the [Service](#) menu. When selecting [Service](#) from the list of menus, the printer prompts the user to enter an eight-digit personal identification number (PIN).


 **NOTE:** The printer automatically exits the [Service](#) menu after about one minute if no items are selected or changed.

Open the Service menu from a touchscreen control panel

1. From the Home screen on the printer control panel, select [Support Tools](#).
2. Open the [Service](#) menu.
3. On the sign-in screen, select [Service Access Code](#) from the drop-down list.
4. Enter the following service access code for the printer:
 - 05065217 (M652/E65050/E65150)
 - 05065317 (M653/E65060/E65160)
 - 05068117 (M681/E67550/E67650)
 - 05068217 (M682/E67560/E67660)

Open the service menu from an LCD control panel

1. From the [Home](#) screen on the printer control panel, use the down arrow ▼ button to scroll to [Support Tools](#), and then press the [OK](#) button.
2. Use the down arrow ▼ button to scroll to [Service](#), and then press the [OK](#) button to select it.
3. Use the down arrow ▼ button to scroll to [Service Access Code](#), and then press the [OK](#) button to select it.
4. Enter the following service access code for the printer:

 **NOTE:** After entering the PIN, press the [OK](#) button.

- 05065217 (M652/E65050/E65150)
- 05065317 (M653/E65060/E65160)
- 05068117 (M681/E67550/E67650)
- 05068217 (M682/E67560/E67660)

The following menu items appear in the [Service](#) menu:

| First level | Second level | Value | Description |
|--|----------------------------|---------|--|
| Event Log | Print | | Print or the event log. |
| Clear Event Log | Clear | | Use this item to clear the printer event log. |
| Cycle Counts | Total Engine Cycles | | Set the page count that was stored in NVRAM prior to installing a new formatter. |
| | Mono Cycle Count | | Set the mono page printed count. |
| | Color Cycle Count | | Set the color page printed count. |
| | Refurbish Cycle Count | | Use this item to record the page count when the printer was refurbished. |
| Serial Number | | | Set the serial number. |
| Service ID | | | Use this item to show the date that the printer was first used on the control panel. This eliminates the need for users to keep paper receipts for proof of warranty. |
| Locked tray sizes (Managed printers only) | Lock Tray 2 size check box | | Select the Lock Tray 2 size check box to enable the lock feature. Select a paper size from the drop-down menu, and then select Save . |
| Cold Reset Paper | | | When you perform a cold reset, the paper size that is stored in NVRAM is reset to the default factory setting. If you replace a formatter board in a country/region that uses A4 as the standard paper size, use this menu to reset the default paper size to A4. LETTER and A4 are the only available values. |
| New Registration Roller | | Yes | Reset the counter for the registration roller after replacing the registration assembly. |
| | | No | |
| New Transfer Kit | | Yes | Reset the counter for the registration roller after replacing the transfer kit. |
| | | No | |
| Low Alerts | | Enable | Turn on (or off) low alerts (for supplies). |
| | | Disable | |
| Reset Low Alerts | | | <ul style="list-style-type: none"> • Reset to level 1 • Reset to level 2 • Reset to level 3 • Set to non-HP managed mode |
| Test Support | Continuous Print from USB | | |

| First level | Second level | Value | Description |
|--------------|----------------------------|--|--|
| | Automatic Calibrations | Disabled Enabled* | |
| MPS Settings | Low Alerts On | On Off | Use this to configure managed services specific settings. |
| | Reset Supplies level | <ul style="list-style-type: none"> Reset to level 1 Reset to level 2 Reset to level 3 Reset to non-HP managed mode | |
| | Consumables Access Control | Enable consumables access control | <p>Use this feature to lock the printer front door to help prevent premature toner cartridge replacement.</p> <p>Select the Enable consumables access control check box to enable the lock feature.</p> <p>Under Replacement Threshold, select one of the following options.</p> <ul style="list-style-type: none"> Normal Delayed |

Printer resets

Restore factory-set defaults



NOTE: The printer restarts automatically after the reset operation completes.

Restore factory-set defaults from a touchscreen control panel

- From the Home screen on the printer control panel, scroll to and touch the [Settings](#) button.
- Open the following menus:
 - [General](#)
 - [Reset Factory Settings](#)
- A verification message advises that completing the reset function might result in loss of data. Touch the [Reset](#) button to complete the process.

Restore factory-set defaults from an LCD control panel

- From the [Home](#) screen on the printer control panel, use the down arrow ▼ button to scroll to [Settings](#), and then press the [OK](#) button.
- Use the down arrow ▼ button to scroll to [General](#), and then press the [OK](#) button to select it.

3. Use the down arrow ▼ button to scroll to [Reset Factory Settings](#), and then press the [OK](#) button to select it.
4. Use the down arrow ▼ button to scroll to [Reset](#), and then press the [OK](#) button to select it.
5. A verification message advises that completing the reset function might result in loss of data. Select [Reset](#) to complete the process.

Restore the service ID

Restore the service ID

When replacing the formatter, the date is lost. Use this menu item to reset the date to the original date that the printer was first used. The date format is YYDDD. Use the following formula to calculate the dates:

1. To calculate YY, subtract 1990 from the calendar year. For instance, if the printer was first used in 2002, calculate YY as follows: $2002 - 1990 = 12$. $YY = 12$.
2. Subtract 1 from 10 (October is the tenth month of the year): $10 - 1 = 9$.
 - Multiply 9 by 30: $9 \times 30 = 270$ or add 17 to 270: $270 + 17 = 287$. Thus, $DDD = 287$.

Convert the service ID to an actual date

Use the printer Service ID number to determine whether the printer is still under warranty. Use the following formula to convert the Service ID into the installation date as follows:

1. Add 1990 to YY to get the actual year that the printer was installed.
2. Divide DDD by 30. If there is a remainder, add 1 to the result. This is the month.
3. The remainder from the calculation in step 2 is the date.


Using the Service ID 12287 as an example, the date conversion is as follows:

1. $12 + 1990 = 2002$, so the year is 2002.
2. 287 divided by $30 = 9$ with a remainder of 17 . Because there is a remainder, add 1 to 9 to get 10, which represents October.
3. The remainder in step 2 is 17, so that is the date.
4. The complete date is 17-October-2002.

 **NOTE:** A six-day grace period is built into the date system.


Printer cold reset

Cold reset using the Pre-boot menu from a touchscreen control panel

 **CAUTION:** This procedure resets all printer configurations and settings to factory defaults (customer configurations and settings are lost).

1. Touch in the middle of the control panel display when you see the [1/8](#) under the HP logo.


Figure 2-97 Open the Pre-boot menu

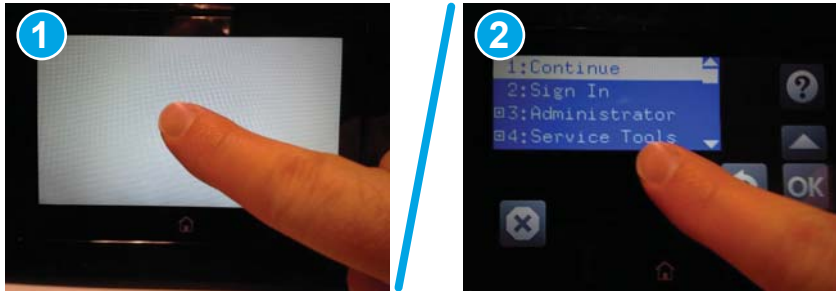



2. Use the down arrow ▼ button to highlight the +3:Administrator item, and then touch the OK button.
3. Use the down arrow ▼ button to highlight the +8:Startup Options item, and then touch the OK button.
4. Use the down arrow ▼ button to highlight the 2 Cold Reset item, and then touch the OK button to select it.
5. Touch the Home button to return to the main Pre-boot menu and highlight the 1:Continue item, and then touch the OK button.

 **NOTE:** The printer will initialize.


Cold reset using the Pre-boot menu from an LCD control panel

 **CAUTION:** This procedure resets all printer configurations and settings to factory defaults (customer configurations and settings are lost).

1. Press the Cancel  button when you see the 1/8 under the HP logo.
2. Use the down arrow ▼ button to highlight the +3:Administrator item, and then press the OK button.
3. Use the down arrow ▼ button to highlight the +8:Startup Options item, and then press the OK button.
4. Use the down arrow ▼ button to highlight the 2 Cold Reset item, and then press the OK button to select it.
5. Touch the Home button to return to the main Pre-boot menu and highlight the 1:Continue item, and then touch the OK button.

 **NOTE:** The printer will initialize.

Format Disk and Partial Clean functions

 **NOTE:** Only for products with an optional hard-disk drive (HDD) installed).

Active and repository firmware locations


The firmware bundle consists of multiple parts. The main components are the Windows CE Operating System and the printer/peripheral firmware files.

There are two locations/partitions on the hard drive where the firmware components are stored:

- The Active, where the operating system and firmware currently are executing.
- The Repository, the recovery location.

If the Active location is damaged, or a [Partial Clean](#) was performed, the printer automatically copies over the OS and firmware files from the Repository location and the printer recovers.

If both the Active and Repository locations are damaged, or a [Format Disk](#) was performed, then both locations are gone and the error message **99.09.67** displays on the control panel display. The user must upload the firmware to the printer in order for it to function again.

 **CAUTION:** The [Format Disk](#) option performs a disk initialization for the entire disk. The operating system, firmware files, and third party files (among other files) will be completely lost. HP does not recommend this action.

Partial Clean

The [Partial Clean](#) option erases all data from the partitions, except for the firmware repository where a backup copy of the firmware file is stored. This allows the disk drive to be reformatted without having to download a firmware upgrade file to return the printer to a bootable state.


Characteristics of a Partial Clean

- Customer-defined settings, third-party solutions, firmware files, and the operating system are deleted.
- Rebooting the printer restores the firmware files from the Repository location, but does not restore any customer-defined settings.
- For previous HP products, a Hard Disk Initialization is similar to executing the [Partial Clean](#) function for this printer.

 **CAUTION:** HP recommends backing-up printer configuration data before executing a [Partial Clean](#) to retain customer-defined settings (if needed). See the [Backup/Restore](#) item in the [Device Maintenance](#) menu.

Reasons for performing Partial Clean

- The printer continually boots up in an error state.

 **NOTE:** Try clearing the error prior to executing a [Partial Clean](#).

- The printer will not respond to commands from the control panel.
- Executing the [Partial Clean](#) function is helpful for troubleshooting hard disk problems.


- To reset the printer by deleting all solutions and customer-defined settings.
- The printer default settings are not properly working.

Execute a Partial Clean

Execute a Partial Clean from a touchscreen control panel

1. Touch in the middle of the control panel display when you see the 1/8 under the HP logo.

Figure 2-98 Open the Pre-boot menu

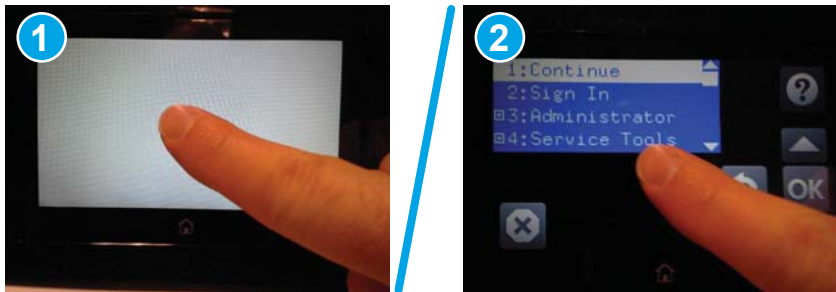


2. Use the down arrow ▼ button to highlight the +3:Administrator item, and then touch the OK button.
3. Use the down arrow ▼ button to highlight Partial Clean and then touch the OK button.
4. Touch the OK button again.
5. Touch the Home button to highlight Continue, and then touch the OK button.

 **NOTE:** The printer initializes.

Execute a Partial Clean from an LCD control panel

 **CAUTION:** This procedure resets all printer configurations and settings to factory defaults (customer configurations and settings are lost).

1. Press the Cancel  button when you see the 1/8 under the HP logo.
2. Use the down arrow ▼ button to highlight the +3:Administrator item, and then press the OK button.
3. Use the down arrow ▼ button to highlight Partial Clean and then press the OK button.
4. Press the OK button again.
5. Press the Home button to highlight Continue, and then press the OK button.

 **NOTE:** The printer initializes.

Format Disk

The **Format Disk** option erases the entire disk drive.


 **CAUTION:** After executing a **Format Disk** option, the printer is *not* bootable.

Characteristics of a Format Disk

- Customer-defined settings, third-party solutions, firmware files, and the operating system are deleted.


 **NOTE:** Rebooting the printer *does not* restore the firmware files.

- Rebooting the printer restores the firmware files from the Repository location, but does not restore any customer-defined settings.
- After executing the [Format Disk](#) function, the message **99.09.67** displays on the control panel.
- After executing the [Format Disk](#) function, the printer firmware must be reloaded.

 **CAUTION:** HP recommends not using the [Format Disk](#) option unless an error occurs and the solution in the printer service manual recommends this solution. After executing the [Format Disk](#) function, the printer is unusable.

HP recommends backing-up printer configuration data before executing a [Format Disk](#) to retain customer-defined settings (if needed). See the [Backup/Restore](#) item in the [Device Maintenance](#) menu.

Reasons for performing Format Disk

- The printer continually boots up in an error state.
-
-  **NOTE:** Try clearing the error prior to executing a [Format Disk](#).
-
- The printer will not respond to commands from the control panel.
 - Executing the [Format Disk](#) function is helpful for troubleshooting hard disk problems.
 - To reset the printer by deleting all solutions and customer-defined settings.

Execute a Format Disk

Execute a Format Disk from a touchscreen control panel

1. Touch in the middle of the control panel display when you see the **1/8** under the HP logo.


Figure 2-99 Open the Pre-boot menu





2. Use the down arrow ▼ button to highlight the **+3:Administrator** item, and then touch the **OK** button.
3. Use the down arrow ▼ button to highlight **Format Disk**, and then touch the **OK** button.
4. Touch the **OK** button again.

 **NOTE:** When the [Format Disk](#) operation is complete, reload the printer firmware.

Execute a Format Disk from an LCD control panel

 **CAUTION:** This procedure resets all printer configurations and settings to factory defaults (customer configurations and settings are lost).

1. Press the **Cancel**  button when you see the **1/8** under the HP logo.
2. Use the down arrow ▼ button to highlight the **+3:Administrator** item, and then press the **OK** button.
3. Use the down arrow ▼ button to highlight **Format Disk**, and then press the **OK** button.
4. Press the **OK** button again.

 **NOTE:** When the **Format Disk** operation is complete, reload the printer firmware.

Firmware upgrades

To download the most recent firmware upgrade for the printer, go to:

- In the US, go to www.hp.com/support/colorljM652, www.hp.com/support/colorljM653, www.hp.com/support/colorljE65050, www.hp.com/support/colorljE65060, www.hp.com/support/colorljE65150, www.hp.com/support/colorljE65160, www.hp.com/support/colorljM681MFP, www.hp.com/support/colorljM682MFP, www.hp.com/support/colorljE67550MFP, www.hp.com/support/colorljE67560MFP, www.hp.com/support/colorljE67650MFP, or www.hp.com/support/colorljE67660MFP.

- a. Select **Get drivers, Software, and Firmware**, and then select the appropriate product by name.



NOTE: More than one printer model might be listed. Make sure to select the correct model so that the upgraded firmware supports all of the printer functions.

- b. Select the driver language and operating system.
- c. Locate the firmware download, and then select **Download**.

- Outside the U.S., go to www.hp.com/support.

- a. Select your country/region.
- b. Select **Drivers & Downloads**.
- c. Enter the product name in the **Find my product** dialogue box, and then select **Go**.



TIP: Click on the **How do I find my product name/number?** link to see a short video on identifying the printer name and number.

- d. Select the appropriate product by name.



NOTE: More than one printer model might be listed. Make sure to select the correct model so that the upgraded firmware supports all of the printer functions.

- e. Select the driver language and operating system.
- f. Locate the firmware download, and then select **Download**.

- [Determine the installed revision of firmware](#)

- [Perform a firmware upgrade](#)

Determine the installed revision of firmware



NOTE: Print a configuration page to determine the installed revision of firmware.

Print the configuration page from a touchscreen control panel

1. From the Home screen on the printer control panel, swipe (right), and then touch the **Reports** button.
2. Touch the **Configuration/Status Pages** item.
3. Touch **Configuration Page** to select it.



TIP: Multiple report pages can be selected, and then printed together.

4. Touch the **Print** button to print the pages.

Print the configuration page from a LCD control panel

1. From the Home screen on the printer control panel, use the down arrow ▼ button to select the **Print** menu.
2. Use the right arrow ► button to scroll to **Reports**, and then press the **OK** button.
3. Use the down arrow ▼ button to scroll to **Configuration/Status Pages**, and then press the **OK** button.
4. Use the down arrow ▼ or ▲ buttons to scroll to **Configuration Page**, and then press the **OK** button to select it.
5. Use the down arrow ▼ and right arrow ► buttons to scroll to **Print**, and then press the **OK** button to print the pages.



TIP: Multiple report pages can be selected, and then printed together.

Figure 2-100 Configuration report

Configuration Page

Device Information

Product Name: HP LaserJet Flow MFP M633
 Device Name: HP LaserJet Flow MFP M633
 Model Number: P-XXXX
 DC Controller Version: 4.108
 Optional Sys Version: 4.101
 Product Serial Number: XXXXXXXXXXXX
 Formatter Number: XXXXXXXXXXXX
 Version: 3.312

Firmware Bundle Version:
 Firmware Revision: 2456048_619902
 Firmware Datecode: 20160712
 HP FutureSmart Level: HP FutureSmart 4

Service ID: 00000
 Pages Since Last Maintenance: 0
 Document Feeder Kit Interval: 150000
 Pages Since Last Doc Feeder Maintenance: 0
 PS Wait Time-out: 300 seconds
 Engine Cycles*: 7
 Cartridge Protection: Off
 Cartridge Policy: Off
 Cartridge Index: PFLP JAP)
 *Not weighted for billing

Installed Personalities and Options

PCL: 20010402
 PCLXL: 20010402
 POSTSCRIPT: 20010402
 PDF: 20130901
 AirPrint: 2040201
 PWRASTER: 2040201
 TIFF: 20150522
 Internal Disk: Hard Disk: Enabled
 Serial Number: W3PH102V
 Model: HP Secure Hard Disk
 Capacity: 355264 Mb
 Hard Disk Encryption Status: Drive is not yet encrypted
 Internal Fax: Ver11.1
 Embedded HP Jetdirect: NP1A30E29
 LDAP Gateway: 0.0.0.0
 Digital Send Advanced

HP Web Services

HP Web Services: Disabled
 ePrint: Disabled

Total RAM: 2560 MB

Event Log


| Number | Cycles | Event |
|--------|--------|----------|
| 47 | 7 | 10:00:59 |
| 48 | 0 | 33:02:02 |
| 49 | 7 | 10:00:59 |

Security

Hard Disk Encryption Status:
 Internal Disk: Drive is not yet encrypted.
 Job Data Encryption Status: Encrypted
 Job Data Persistence: Persistent (not volatile)
 File Erase Mode: Non-Secure Fast Erase (No overwrite)
 Control Panel Password: Disabled
 Support Key: GEMJ-C087-XX3E
 Host USB plug and play: Enabled
 Device USB: Enabled
 Whitelisting: Development

Paper Trays and Options

Default Paper Size: Letter (8.5x11)
 Tray 1 Size: Any Size
 Tray 1 type: Any Type
 Tray 2 Size: Letter (8.5x11)
 Tray 2 type: Plain
 Tray 3 Size: Any Custom
 Tray 3 type: Plain
 Tray 4 Size: Legal (8.5x14)
 Tray 4 type: Plain
 Duplex Unit:
 Device Name: HP 3-Bin Stapler/Stacker Function Separator
 Model: STX-20-STP-200
 Manufacturer: HEWLETT PACKARD
 Firmware Revision: ED01.02.01.02
 1. Output Bin 1, 500 Sheets, Standard bin
 2. Output Bin 2, 400 Sheets, Upper bin
 3. Output Bin 3, 100 Sheets, Middle bin

01/15/2017 19:54:08

English (United States)

Perform a firmware upgrade

The firmware bundle is a .bdl file. This file requires an interactive upgrade method. The traditional FTP, LPR or Port 9100 methods of upgrading are not available. Use one of the following methods to upgrade the firmware for this printer.

HP Embedded Web Server



NOTE: The firmware update might take 10 minutes or longer based on the input/output (I/O) transfer rates and the time it takes for the printer to reinitialize.


1. Open an Internet browser window.
2. Enter the printer IP address in the URL line.
3. Select the **Firmware Upgrade** link from the **General** tab or from the **Troubleshooting** tab.
4. Browse to the location that the firmware upgrade file was downloaded to, and then select the firmware file—the file has a .bdl file extension. Select the **Install** button to perform the upgrade.




NOTE: Do not close the browser window OR interrupt communication until the HP Embedded Web Server (EWS) displays the confirmation page.

5. After the printer reinitializes, print a configuration page and verify that the latest firmware version has been installed.

USB flash drive (control-panel menu)

 **NOTE:** USB flash drives that are not using a FAT32 format, or do not have a CD formatted partition, might not be recognized by the printer. If the printer does not recognize a USB flash drive, try using a different USB flash drive.


 **TIP:** The USB port on the printer must be enabled. If it is disabled, use the [Enable Retrieve from USB](#) item in the [General Settings](#) menu to enable it.

USB flash drive firmware (control-panel menu) update from a touchscreen control panel

1. Copy the .bdl file to a portable USB flash drive.
2. Turn the printer on, and then wait until it initializes.
3. From the Home screen on the printer control panel, swipe (right), and then touch the [Support Tools](#) item.
4. Open the following menus:
 - [Maintenance](#)
 - [USB Firmware Upgrade](#)
5. Insert the USB flash drive with the .bdl file on it into the USB port on the printer.
6. Touch the .bdl file, and then touch the [Install](#) button.

 **NOTE:** If there is more than one .bdl file on the storage device, make sure to select the correct file for this printer.

7. When the upgrade is complete, the printer restarts.


 **TIP:** Print a configuration page and verify that the upgrade firmware version was installed.

USB flash drive firmware (control-panel menu) update from a LCD control panel


1. Copy the .bdl file to a portable USB flash drive.
2. From the Home screen on the printer control panel, use the down arrow ▼ button to select the [Print](#) menu.
3. Use the right arrow ► button to scroll to and select the [Support Tools](#) menu, and then press the [OK](#) button.
4. Use the down arrow ▼ button to scroll to and select the [Maintenance](#) menu, and then press the [OK](#) button.
5. Use the down arrow ▼ button to scroll to and select the [USB Firmware Upgrade](#) menu, and then press the [OK](#) button.
6. Insert the USB flash drive with the .bdl file on it into the USB port on the printer.
7. Use the down arrow ▼ button to scroll to the appropriate .bdl file, and then press the [OK](#) button to select.

 **NOTE:** If there is more than one .bdl file on the storage device, make sure to select the correct file for this printer.

8. Use the down arrow ▼ and right arrow ► buttons to scroll to [Install](#), and then press the [OK](#) button to start the firmware upgrade.

 **TIP:** Print a configuration page and verify that the upgrade firmware version was installed.


USB flash drive (Pre-boot menu)

 **IMPORTANT:** Only use this method of performing a firmware upgrade if the printer cannot initialize to the **Ready** state.

USB flash drive firmware (Pre-boot menu) update from a touchscreen control panel

1. Copy the .bdl file to a portable USB flash drive.
2. Touch the middle of the control-panel display when you see the 1/8 under the logo.

Figure 2-101 Open the Pre-boot menu

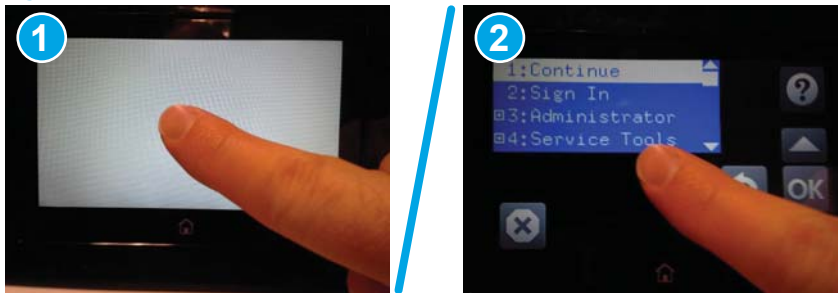


3. Touch the down arrow ▼ button to highlight +3 Administrator, and then touch the OK button.
4. If necessary, touch the down arrow ▼ button to highlight +1 Download, and then touch the OK button.
5. Insert the USB flash drive with the .bdl file on it into the USB port on the printer.

 **NOTE:** If the error message **No USB Thumbdrive Files Found** displays on the control-panel display, try using a different portable storage device.


6. Touch the down arrow ▼ button to highlight **USB Thumbdrive**, and then touch the OK button.
7. Touch the down arrow ▼ button to highlight the .bdl file, and then touch the OK button.

 **NOTE:** The upgrade process can take 10 minutes or longer to complete.

 **TIP:** If there is more than one .bdl file on the storage device, make sure to select the correct file for this printer.

8. When the message **Complete** displays on the control-panel display, turn the printer power off, and then on again.
9. Touch the OK button to begin the upgrade. When the upgrade is complete, the printer will initialize to the **Ready** state.
10. When the upgrade process is complete, print a configuration page and verify that the upgrade firmware version was installed.

USB flash drive firmware (Pre-boot menu) update from a LCD control panel

1. Copy the .bdl file to a portable USB flash drive.
2. Press the **Cancel**  button when you see the 1/8 under the logo.
3. Press the down arrow ▼ button to highlight +3 Administrator, and then press the OK button.

4. If necessary, press the down arrow ▼ button to highlight **+1 Download**, and then press the **OK** button.
5. Insert the USB flash drive with the .bdl file on it into the USB port on the printer.



NOTE: If the error message **No USB Thumbdrive Files Found** displays on the control-panel display, try using a different portable storage device.

6. Press the down arrow ▼ button to highlight **USB Thumbdrive**, and then press the **OK** button.
7. Press the down arrow ▼ button to highlight the .bdl file, and then press the **OK** button.



NOTE: The upgrade process can take 10 minutes or longer to complete.



TIP: If there is more than one .bdl file on the storage device, make sure to select the correct file for this printer.

8. When the message **Complete** displays on the control-panel display, turn the printer power off, and then on again.
9. When the upgrade process is complete, print a configuration page and verify that the upgrade firmware version was installed.

Solve fax problems or email

Fax or email troubleshooting information is not provided in this service manual. The most current information is available in WISE or HP Channel Services Network (CSN). Search using model number then use "fax troubleshooting" as the search term.

HP service personnel, go to one of the following WISE sites:

Americas (AMS)

- <https://support.hp.com/wise/home/ams-en> WISE - English
- <https://support.hp.com/wise/home/ams-es> WISE - Spanish
- <https://support.hp.com/wise/home/ams-pt> WISE - Portuguese
- <https://support.hp.com/wise/home/ams-fr> WISE - French

Europe / Middle East / Africa (EMEA)

- <https://support.hp.com/wise/home/apj-en> WISE - English
- <https://support.hp.com/wise/home/apj-ja> WISE - Japanese
- <https://support.hp.com/wise/home/apj-ko> WISE - Korean
- <https://support.hp.com/wise/home/apj-zh-Hans> WISE - Chinese (simplified)
- <https://support.hp.com/wise/home/apj-zh-Hant> WISE - Chinese (traditional)
- <https://support.hp.com/wise/home/apj-th> WISE - Thai

EMEA

- <https://support.hp.com/wise/home/emea-en> WISE - English

Channel partners, go to partner.hp.com.

A Printer specifications

- [Printer dimensions](#)
- [Printer space requirements](#)
- [Power consumption, electrical specifications, and acoustic emissions](#)
- [Operating-environment range](#)
- [Certificates of Volatility](#)

Printer dimensions

- [Printer dimensions \(M652/M653/E65050/E65060/E65150/E65160\)](#)
- [Printer dimensions \(M681/M682/E67550/E67560/E67650/E67660\)](#)

Printer dimensions (M652/M653/E65050/E65060/E65150/E65160)

Table A-1 Dimensions for the n and dn models

| | Printer fully closed | Printer fully opened |
|--------|--|--|
| Height | M652n and M652dn models: 482 mm (19 in) | M652n and M652dn models: 482 mm (19 in) |
| | M653dn models: 510 mm (20 in) | M653dn models: 510 mm (20 in) |
| Depth | 458 mm (18 in) | 770 mm (30.3 in) |
| Width | 510 mm (20 in) | 963 mm (37.9 in) |
| Weight | 26.8 kg (59 lb) | |

Table A-2 Dimensions for the x model

| | Printer fully closed | Printer fully opened |
|--------|----------------------|----------------------|
| Height | 510 mm (16.3 in) | 510 mm (19.2 in) |
| Depth | 458 mm (18 in) | 770 mm (30.3 in) |
| Width | 510 mm (20 in) | 963 mm (37.9 in) |
| Weight | 33.1 kg (72.9 lb) | |

Table A-3 Dimensions for the 1 x 550-sheet paper feeder

| | |
|--------|-------------------------------|
| Height | 130 mm (5.1 in) |
| Depth | Tray closed: 458 mm (18 in) |
| | Tray opened: 770 mm (30.3 in) |
| Width | Door closed: 510 mm (20.7 in) |
| | Door opened: 510 mm (20.7 in) |
| Weight | 6.3 kg (13.8 lb) |

Table A-4 Dimensions for the printer with one 1 x 550-sheet paper feeder

| | Printer fully closed | Printer fully opened |
|--------|--|--|
| Height | M652n and M652dn models: 612 mm (14 in) | M652n and M652dn models: 612 mm (14 in) |
| | M653dn models: 640 mm (25.1 in) | M653dn models: 640 mm (25.1 in) |
| | M653x models: 770 mm (30.3 in) | M653x models: 770 mm (30.3 in) |
| Depth | 458 mm (18 in) | 770 mm (30.3 in) |

Table A-4 Dimensions for the printer with one 1 x 550-sheet paper feeder (continued)

| | Printer fully closed | Printer fully opened |
|--------|----------------------|----------------------|
| Width | 510 mm (20.7 in) | 963 mm (37.9 in) |
| Weight | 33.1 kg (72.9 lb) | |

Table A-5 Dimensions for the 1 x 550-sheet paper feeder with stand

| | |
|--------|--|
| Height | 450 mm (17.7 in) |
| Depth | Tray closed: 657 mm (25.8 in) Tray opened: 948 mm (37.3 in) |
| Width | Door closed: 657 mm (25.8 in) Door opened: 992 mm (39 in) |
| Weight | 18.6 kg (41 lb) |

Table A-6 Dimensions for the printer and the 1 x 550-sheet paper feeder with stand

| | Printer and accessories fully closed | Printer and accessories fully opened |
|--------|--|--|
| Height | M652n and M652dn models: 932 mm (36.6 in) M653dn models: 960 mm (37.7 in) | M652n and M652dn models: 932 mm (36.6 in) M653dn models: 960 mm (37.7 in) |
| Depth | 657 mm (25.8 in) | 948 mm (37.3 in) |
| Width | 657 mm (25.8 in) | 992 mm (39 in) |
| Weight | 45.4 kg (100 lb) | |

Table A-7 Dimensions for the 3 x 550-sheet paper feeder with stand

| | |
|--------|--|
| Height | 450 mm (17.7 in) |
| Depth | Tray closed: 657 mm (25.8 in) Tray open: 984 mm (37.3 in) |
| Width | Door closed: 657 mm (25.8 in) Door open: 992 mm (39 in) |
| Weight | 22.7 kg (50 lb) |

Table A-8 Dimensions for the printer and the 3 x 550-sheet paper feeder with stand

| | Printer and accessories fully closed | Printer and accessories fully opened |
|--------|--|--|
| Height | M652n and M652dn models: 932 mm (36.6 in) M653dn models: 960 mm (37.7 in) | M652n and M652dn models: 932 mm (36.6 in) M653dn models: 960 mm (37.7 in) |
| Depth | 657 mm (25.8 in) | 984 mm (37.3 in) |

Table A-8 Dimensions for the printer and the 3 x 550-sheet paper feeder with stand (continued)

| | Printer and accessories fully closed | Printer and accessories fully opened |
|--------|--------------------------------------|--------------------------------------|
| Width | 657 mm (25.8 in) | 992 mm (39 in) |
| Weight | 49.5 kg (109 lb) | |

Table A-9 Dimensions for the High-capacity input feeder (HCI) with stand

| | |
|--------|--|
| Height | 450 mm (17.7 in) |
| Depth | Tray closed: 657 mm (25.8 in) Tray open: 967 mm (38 in) |
| Width | Door closed: 657 mm (25.8 in) Door open: 992 mm (39 in) |
| Weight | 25.2 kg (55.5 lb) |

Table A-10 Dimensions for the printer and the High-capacity input feeder (HCI) with stand

| | Printer and accessories fully closed | Printer and accessories fully opened |
|--------|--|--|
| Height | M652n and M652dn models: 932 mm (36.6 in) M653dn models: 960 mm (37.7 in) | M652n and M652dn models: 932 mm (36.6 in) M653dn models: 960 mm (37.7 in) |
| Depth | 657 mm (25.8 in) | 967 mm (38 in) |
| Width | 657 mm (25.8 in) | 992 mm (39 in) |
| Weight | 52 kg (114.6 lb) | |

Printer dimensions (M681/M682/E67550/E67560/E67650/E67660)

Table A-11 Dimensions for the M681dh/Flow M681f/E67650/E67660 models

| | Printer fully closed | Printer fully opened |
|--------|----------------------|----------------------|
| Height | 658 mm (25.9 in) | 910 mm (35.8 in) |
| Depth | 460 mm (18.1 in) | 770 mm (30.3 in) |
| Width | 510 mm (20 in) | 963 mm (37.9 in) |
| Weight | 28 kg (61.7 lb) | |

Table A-12 Dimensions for the M681f models

| | Printer fully closed | Printer fully opened |
|--------|----------------------|----------------------|
| Height | 1108 mm (43.6 in) | 1360 mm (53.5 in) |
| Depth | 657 mm (25.8 in) | 948 mm (37.3 in) |
| Width | 657 mm (25.8 in) | 992 mm (39 in) |
| Weight | 46.6 kg (102.7 lb) | |

Table A-13 Dimensions for the Flow M681z models

| | Printer fully closed | Printer fully opened |
|--------|----------------------|----------------------|
| Height | 1270 mm (50 in) | 1529 mm (60.1 in) |
| Depth | 657 mm (25.8 in) | 967 mm (38 in) |
| Width | 657 mm (25.8 in) | 992 mm (39 in) |
| Weight | 59.3 kg (130.7 lb) | |

Table A-14 Dimensions for the Flow M682z models

| | Printer fully closed | Printer fully opened |
|--------|----------------------|----------------------|
| Height | 1270 mm (50 in) | 1529 mm (60.1 in) |
| Depth | 657 mm (25.8 in) | 770 mm (30.3 in) |
| Width | 657 mm (25.8 in) | 992 mm (39 in) |
| Weight | 61.8 kg (136.2 lb) | |

Table A-15 Dimensions for the 1 x 550-sheet paper feeder

| | |
|--------|-------------------------------|
| Height | 130 mm (5.1 in) |
| Depth | Tray closed: 458 mm (18 in) |
| | Tray opened: 770 mm (30.3 in) |

Table A-15 Dimensions for the 1 x 550-sheet paper feeder (continued)

| | |
|--------|-------------------------------|
| Width | Door closed: 510 mm (20.7 in) |
| | Door opened: 510 mm (20.7 in) |
| Weight | 6.3 kg (13.8 lb) |

Table A-16 Dimensions for the printer with one 1 x 550-sheet paper feeder

| | Printer fully closed | Printer fully opened |
|--------|--|--|
| Height | M681 dh/Flow M681f/E67650/E67660 models: 788 mm (31 in) | M681 dh/Flow M681f/E67650/E67660 models: 1040 mm (40.9 in) |
| | M681f models: 1238 mm (48.7 in) | M681f models: 1490 mm (58.6 in) |
| Depth | M681 dh/Flow M681f/E67650/E67660 models: 460 mm (18.1 in) | M681 dh/Flow M681f/E67650/E67660 models: 770 mm (30.3 in) |
| | M681f models: 657 mm (25.8 in) | M681f models: 948 mm (37.3 in) |
| Width | M681 dh/Flow M681f/E67650/E67660 models: 510 mm (20 in) | M681 dh/Flow M681f/E67650/E67660 models: 963 mm (37.9 in) |
| | M681f models: 657 mm (25.8 in) | M681f models: 992 mm (39 in) |
| Weight | M681 dh/Flow M681f/E67650/E67660 models: 34.3 kg (75.6 lb) | |
| | M681f models: 52.9 kg (116.6 lb) | |

Table A-17 Dimensions for the 1 x 550-sheet paper feeder with stand

| | |
|--------|-------------------------------|
| Height | 450 mm (17.7 in) |
| Depth | Tray closed: 657 mm (25.8 in) |
| | Tray opened: 948 mm (37.3 in) |
| Width | Door closed: 510 mm (20.7 in) |
| | Door opened: 992 mm (39 in) |
| Weight | 18.6 kg (41 lb) |

Table A-18 Dimensions for the printer and the 1 x 550-sheet paper feeder with stand

| | Printer fully closed | Printer fully opened |
|--------|----------------------|----------------------|
| Height | 1108 mm (43.6 in) | 1360 mm (53.5 in) |
| Depth | 657 mm (25.8 in) | 948 mm (37.3 in) |
| Width | 657 mm (25.8 in) | 992 mm (39 in) |
| Weight | 46.6 kg (102.7 lb) | |

Table A-19 Dimensions for the 3 x 550-sheet paper feeder with stand

| | |
|--------|--|
| Height | 450 mm (17.7 in) |
| Depth | Tray closed: 657 mm (25.8 in) Tray opened: 984 mm (37.3 in) |
| Width | Door closed: 657 mm (25.8 in) Door opened: 992 mm (39 in) |
| Weight | 22.7 kg (50 lb) |

Table A-20 Dimensions for the printer and the 3 x 550-sheet paper feeder with stand

| | Printer fully closed | Printer fully opened |
|--------|----------------------|----------------------|
| Height | 1108 mm (43.6 in) | 1360 mm (53.5 in) |
| Depth | 657 mm (25.8 in) | 984 mm (37.3 in) |
| Width | 657 mm (25.8 in) | 992 mm (39 in) |
| Weight | 50.7 kg (111.7 lb) | |

Table A-21 Dimensions for the High-capacity input tray with stand

| | |
|--------|--|
| Height | 450 mm (17.7 in) |
| Depth | Tray closed: 657 mm (25.8 in) Tray opened: 967 mm (38 in) |
| Width | Door closed: 657 mm (25.8 in) Door opened: 992 mm (39 in) |
| Weight | 25.2 kg (55.5 lb) |

Table A-22 Dimensions for the printer and the high-capacity input tray with stand

| | Printer fully closed | Printer fully opened |
|--------|----------------------|----------------------|
| Height | 1108 mm (43.6 in) | 1360 mm (53.5 in) |
| Depth | 657 mm (25.8 in) | 967 mm (38 in) |
| Width | 657 mm (25.8 in) | 992 mm (39 in) |
| Weight | 53.2 kg (117.2 lb) | |


Printer space requirements

HP recommends that the following distances be added to the printer dimensions provided in this chapter to make sure there is sufficient space to open doors and covers, and to provide proper ventilation.

- From the left-side or right-side of the printer to an obstruction, add:
 - 430 mm (17 in)
- From the front-side of the printer to an obstruction, add:
 - 610 mm (24 in)
- From the back-side of the printer to an obstruction, add:
 - 460 mm (18 in)

Power consumption, electrical specifications, and acoustic emissions

See www.hp.com/support/colorljM652, www.hp.com/support/colorljM653, www.hp.com/support/colorljE65050, www.hp.com/support/colorljE65060, www.hp.com/support/colorljE65150, www.hp.com/support/colorljE65160, www.hp.com/support/colorljM681MFP, www.hp.com/support/colorljM682MFP, www.hp.com/support/colorljE67550MFP, www.hp.com/support/colorljE67560MFP, www.hp.com/support/colorljE67650MFP, or www.hp.com/support/colorljE67660MFP for current information.

 **CAUTION:** Power requirements are based on the country/region where the printer is sold. Do not convert operating voltages. This will damage the printer and void the printer warranty.

Operating-environment range

- [Operating-environment range \(M652/M653/E65050/E65060/E65150/E65160\)](#)
- [Operating-environment range \(M681/M682/E67550/E67560/E67650/E67660\)](#)

Operating-environment range (M652/M653/E65050/E65060/E65150/E65160)

Table A-23 Operating-environment specifications

| Environment | Recommended | Allowed |
|-------------------|-----------------------------------|------------------------------|
| Temperature | 15° to 27°C (59° to 80.6°F) | 10° to 30°C (50° to 86°F) |
| Relative humidity | 30% to 70% relative humidity (RH) | 10% to 80% RH |
| Altitude | Not applicable | 0 to 3048 m (0 to 10,000 ft) |

Operating-environment range (M681/M682/E67550/E67560/E67650/E67660)

Table A-24 Operating-environment specifications

| Environment | Recommended | Allowed |
|-------------------|-----------------------------------|------------------------------|
| Temperature | 17° to 25°C (62.6° to 77°F) | 15° to 30°C (59° to 86°F) |
| Relative humidity | 30% to 70% relative humidity (RH) | 10% to 80% RH |
| Altitude | Not applicable | 0 to 3048 m (0 to 10,000 ft) |

Certificates of Volatility

Figure A-1 Certificate of Volatility (1 of 2; M652/M653/E65050/E65060/E65150/E65160)

| Hewlett-Packard Certificate of Volatility | | | | |
|---|----------------|---|--|---|
| Model: HP Color LaserJet Enterprise M65x series | | Part Number: Enterprise J7Z98A=M652N J7Z99A=M652DN J8A04A=M653DN J8A05A=M653X J8A06A=M653DH | | Address: Hewlett Packard Company 11311 Chinden Blvd Boise, ID 83714 |
| Volatile Memory | | | | |
| Does the device contain volatile memory (Memory whose contents are lost when power is removed)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (SRAM, DRAM, etc): DDR3 - DRAM | Size: 1GB | User Modifiable: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Function: Operation system and print/scan buffer | Steps to clear memory: When the printer is powered off the memory is erased. |
| Type (SRAM, DRAM, etc): | Size: | User Modifiable: <input type="checkbox"/> Yes <input type="checkbox"/> No | Function: | Steps to clear memory: |
| Type (SRAM, DRAM, etc): | Size: | User Modifiable: <input type="checkbox"/> Yes <input type="checkbox"/> No | Function: | Steps to clear memory: |
| Non-Volatile Memory | | | | |
| Does the device contain non-volatile memory (Memory whose contents are retained when power is removed)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (Flash, EEPROM, etc): IOD EEPROM | Size: 32KB | User Modifiable: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Function: Store customer setting data for backup/restore | Steps to clear memory: There are no steps to clear this data. |
| Type (Flash, EEPROM, etc): SPI Flash | Size: 4MB | User Modifiable: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Function: Contains the boot code and factory product configuration data required for the device to function. User modifications are limited to downloading digitally signed HP firmware images. | Steps to clear memory: There are no steps to clear this data |
| Type (Flash, EEPROM, etc): | Size: | User Modifiable: <input type="checkbox"/> Yes <input type="checkbox"/> No | Function: | Steps to clear memory: |
| Mass Storage | | | | |
| Does the device contain mass storage memory (Hard Disk Drive, Tape Backup)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (HDD, Tape, etc): HDD | Size: 320GB | User Modifiable: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Function: OS and user data | Steps to clear memory: Firmware update |
| Type (HDD, Tape, etc): EMMC | Size: 8GB | User Modifiable: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Function: OS and user data | Steps to clear memory: Firmware update |

Figure A-2 Certificate of Volatility (2 of 2; M652/M653/E65050/E65060/E65150/E65160)

| USB | |
|--|--|
| Does the item accept USB input and if so, for what purpose (i.e Print Jobs, device firmware updates, scan upload)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below | |
| Print jobs, HP digitally signed firmware upgrades, 3rd party application loading. USB ports can be disabled. | |
| Can any data other than scan upload be sent to the USB device)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below | |
| Diagnostic service logs can be uploaded. Print files can be printed via a USB thumb drive. | |

| RF/RFID | |
|--|--------------------------------|
| Does the item use RF or RFID for receive or transmit of any data including remote diagnostics. (e.g. Cellular phone, Bluetooth) <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If Yes please describe below | |
| Purpose: | |
| Frequency: | Bandwidth: |
| Modulation: | Effective Radiate Power (ERP): |
| Specifications: | |

| Other Transmission Capabilities | |
|---|---|
| Does the device employ any other methods of non-wired access to transmit or receive any data whatsoever (e.g. anything other than standard hard wired TCP/IP, direct USB, or parallel connections)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below: | |
| Purpose: WiFi Direct Print | |
| Frequency: 2.4 GHz | Bandwidth: 2401 - 2495 MHz; depending on selected channel in 2.4GHz band. 5180 - 5825 MHz; depending on selected channel in 5GHz band. |
| Modulation: | Effective Radiate Power (ERP): |
| Specifications: 802.11 b/g/n | |

| Other Transmission Capabilities | |
|---|--|
| Does the device employ any other methods of non-wired access to transmit or receive any data whatsoever (e.g. anything other than standard hard wired TCP/IP, direct USB, or parallel connections)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below: | |
| Purpose: Device Beaconing, Secure Print Apps | |
| Frequency: 2.4 GHz | Bandwidth: 2400-2483.5 MHz; depending on selected channel. |
| Modulation: | Effective Radiate Power (ERP): |
| Specifications: BTLE4.0 compliant | |

| Other Capabilities | |
|---|--|
| Does the device employ any other method of communications such as a Modem to transmit or receive any data whatsoever? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If Yes please describe below: | |
| Purpose: | |
| Specifications: | |

Figure A-3 Certificate of Volatility (1 of 2; M681/M682/E67550/E67560/E67650/E67660)

| Hewlett-Packard Certificate of Volatility | | | | |
|---|--------------------------------------|--|--|---|
| Model: HP Color LaserJet Enterprise M68x series | | Part Number: Enterprise J8A17A=M682Z J8A11A=M681F J8A13A=M681Z J8A17A=M682Z | | Address: Hewlett Packard Company 11311 Chinden Blvd Boise, ID 83714 |
| Volatile Memory | | | | |
| Does the device contain volatile memory (Memory whose contents are lost when power is removed)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (SRAM, DRAM, etc): DDR3 - DRAM | Size: 2GB- Ent 2.5GB - Flow | User Modifiable: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Function: Operation system and print/scan buffer | Steps to clear memory: When the printer is powered off the memory is erased. |
| Type (SRAM, DRAM, etc): | Size: | User Modifiable: <input type="checkbox"/> Yes <input type="checkbox"/> No | Function: | Steps to clear memory: |
| Type (SRAM, DRAM, etc): | Size: | User Modifiable: <input type="checkbox"/> Yes <input type="checkbox"/> No | Function: | Steps to clear memory: |
| Non-Volatile Memory | | | | |
| Does the device contain non-volatile memory (Memory whose contents are retained when power is removed)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (Flash, EEPROM, etc): IOD EEPROM | Size: 32KB | User Modifiable: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Function: Store customer setting data for backup/restore | Steps to clear memory: There are no steps to clear this data. |
| Type (Flash, EEPROM, etc): SPI Flash | Size: 4MB | User Modifiable: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Function: Contains the boot code and factory product configuration data required for the device to function. User modifications are limited to downloading digitally signed HP firmware images. | Steps to clear memory: There are no steps to clear this data |
| Type (Flash, EEPROM, etc): | Size: | User Modifiable: <input type="checkbox"/> Yes <input type="checkbox"/> No | Function: | Steps to clear memory: |
| Mass Storage | | | | |
| Does the device contain mass storage memory (Hard Disk Drive, Tape Backup)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (HDD, Tape, etc): HDD | Size: 320GB | User Modifiable: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Function: OS and user data | Steps to clear memory: Firmware update |
| USB | | | | |
| Does the item accept USB input and if so, for what purpose (i.e Print Jobs, device firmware updates, scan upload)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below | | | | |
| Print jobs, HP digitally signed firmware upgrades, 3rd party application loading. USB ports can be disabled. | | | | |
| Can any data other than scan upload be sent to the USB device)? | | | | |
| <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below | | | | |
| Diagnostic service logs can be uploaded. Print files can be printed via a USB thumb drive. | | | | |

Figure A-4 Certificate of Volatility (2 of 2; M681/M682/E67550/E67560/E67650/E67660)

| RF/RFID | |
|--|--------------------------------|
| Does the item use RF or RFID for receive or transmit of any data including remote diagnostics. (e.g. Cellular phone, Bluetooth) <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If Yes please describe below | |
| Purpose: | |
| Frequency: | Bandwidth: |
| Modulation: | Effective Radiate Power (ERP): |
| Specifications: | |

| Other Transmission Capabilities | |
|---|---|
| Does the device employ any other methods of non-wired access to transmit or receive any data whatsoever (e.g. anything other than standard hard wired TCP/IP, direct USB, or parallel connections)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below: | |
| Purpose: WiFi Direct Print | |
| Frequency: 2.4 GHz, 5GHz | Bandwidth: 2401 - 2495 MHz; depending on selected channel in 2.4GHz band. 5180 - 5825 MHz; depending on selected channel in 5GHz band. |
| Modulation: | Effective Radiate Power (ERP): |
| Specifications: 802.11 b/g/n | |

| Other Transmission Capabilities | |
|---|--|
| Does the device employ any other methods of non-wired access to transmit or receive any data whatsoever (e.g. anything other than standard hard wired TCP/IP, direct USB, or parallel connections)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below: | |
| Purpose: Device Beaconsing, Secure Print Apps | |
| Frequency: 2.4 GHz | Bandwidth: 2400-2483.5 MHz; depending on selected channel. |
| Modulation: | Effective Radiate Power (ERP): |
| Specifications: BTLE4.0 compliant | |

| Other Capabilities | |
|---|--|
| Does the device employ any other method of communications such as a Modem to transmit or receive any data whatsoever? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If Yes please describe below: | |
| Purpose: | |
| Specifications: | |

Hewlett-Packard Certificate of Volatility

| | | |
|--|--|--|
| Model: HP Color LaserJet Managed E65150dn HP Color LaserJet Managed E65160dn | Part Number: 3GY03A = E65150dn 3GY04A = E65160dn | Address: Hewlett Packard Company 11311 Chinden Blvd Boise, ID 83714 |
|--|--|--|

Volatile Memory

| | | | | |
|---|-------|---|---|---|
| Does the device contain volatile memory (Memory whose contents are lost when power is removed)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (SRAM, DRAM, etc.): | Size: | User Modifiable: | Function: | Steps to clear memory: |
| DDR3 - DRAM | 1GB | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Store customer setting data for backup/restore. | When the printer is powered off the memory is erased. |

Non-Volatile Memory

| | | | | |
|---|-------------------------|---|---|---|
| Does the device contain non-volatile memory (Memory whose contents are retained when power is removed)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (Flash, EEPROM, etc.): | Size: | User Modifiable: | Function: | Steps to clear memory: |
| IOD EEPROM | 32KB | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Backup device for critical system counters and product configuration information. | There are no steps to clear this data. |
| SPI Flash | 4MB | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Contains the boot code and factory product configuration data required for the device to function. User modifications are limited to downloading digitally signed HP firmware images. | There are no steps to clear this data |
| EEPROM (LAN) | 1KB | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Stores some LAN data/settings | There are no steps to clear this data. |
| TPM | 16Kb (8x 2048 bit keys) | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Industry standard secure crypto-processor used for secure access and securing sensitive data. | To clear the customer storage root key, CSRK, disable the TPM in the pre-boot menu. |
| SPI Flash (2 devices) | 4MB per device | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Contains Encrypted Sensor Data. | Data is encrypted, so there are no steps to clear this data. |

Mass Storage

| | | | | |
|---|-------|---|---|--|
| Does the device contain mass storage memory (Hard Disk Drive, Tape Backup)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (HDD, Tape, etc.): | Size: | User Modifiable: | Function: | Steps to clear memory: |
| EMMC | 8GB | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Stores customer data, OS, applications digitally signed firmware images, persistent data, and temporary data used for processing and system functions | There are several ways to erase this: 1. Secure Storage Erase - Erases temporary files and job data by overwriting information one or three times 2. Secure Disk Erase - Industry standard ATA Secure Erase. Overwrites all data on the hard drive. 3. Secure File Erase - Erases files when jobs finish processing by overwriting them one or three times. |

USB

| | |
|---|--|
| Does the item accept USB input and if so, for what purpose (i.e. Print Jobs, device firmware updates, scan upload)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below | |
| Print jobs, HP digitally signed firmware upgrades, 3rd party application loading. USB ports can be disabled. | |
| Can any data other than scan upload be sent to the USB device? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below | |
| Diagnostic service logs can be uploaded. Print files can be printed via a USB thumb drive. | |

| |
|--|
| |
|--|

| RF/Rfid | |
|---|--------------------------------|
| Does the item use RF or RFID for receive or transmit of any data including remote diagnostics? (e.g. Cellular phone, Bluetooth) <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If Yes please describe below | |
| Purpose: | |
| Frequency: | Bandwidth: |
| Modulation: | Effective Radiate Power (ERP): |
| Specifications: | |

| Other Transmission Capabilities | |
|---|--------------------------------|
| Does the device employ any other methods of non-wired access to transmit or receive any data whatsoever (e.g. anything other than standard hard-wired TCP/IP, direct USB, or parallel connections)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If Yes please describe below: | |
| Purpose: | |
| Frequency: | Bandwidth: |
| Modulation: | Effective Radiate Power (ERP): |
| Specifications: | |

| Other Capabilities | |
|---|--|
| Does the device employ any other method of communications such as a Modem to transmit or receive any data whatsoever? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If Yes please describe below: | |
| Purpose: | |
| Specifications: | |

| Author Information | | | |
|-------------------------|--|----------------------------------|---------------------------|
| Name: Casey Campbell | Title: Hardware Technical Marketing Engineer | Email: casey.campbell1@hp.com | Business Unit: IPG |
| Signature: | | | Date Prepared: 03/22/2019 |

Hewlett-Packard Certificate of Volatility

| | | |
|---|--|---|
| Model: HP Color LaserJet Managed MFP E67650dh HP Color LaserJet Managed Flow MFP E67660z | Part Number: 3GY31A = E67650dh 3GY32A = E67660z | Address: Hewlett Packard Company 11311 Chinden Blvd Boise, ID 83714 |
|---|--|---|

Volatile Memory

| | | | | |
|---|--|---|--|---|
| Does the device contain volatile memory (Memory whose contents are lost when power is removed)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (SRAM, DRAM, etc.): DDR3 - DRAM | Size: 2GB- Non-Flow 2.5GB - Flow | User Modifiable: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Function: Used for temporary storage during the process of jobs, and for applications that are running on the OS. (Note: Total memory on formatter consists of 1.25GB.) | Steps to clear memory: When the printer is powered off the memory is erased. |

Non-Volatile Memory

| | | | | |
|---|----------------------------------|---|--|---|
| Does the device contain non-volatile memory (Memory whose contents are retained when power is removed)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (Flash, EEPROM, etc.): IOD EEPROM | Size: 32KB | User Modifiable: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Function: Backup device for critical system counters and product configuration information. | Steps to clear memory: There are no steps to clear this data. |
| Type (Flash, EEPROM, etc.): SPI Flash | Size: 4MB | User Modifiable: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Function: Contains the boot code and factory product configuration data required for the device to function. User modifications are limited to downloading digitally signed HP firmware images. | Steps to clear memory: There are no steps to clear this data |
| Type (Flash, EEPROM, etc.): EEPROM (LAN) | Size: 1KB | User Modifiable: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Function: Stores some LAN data/settings | Steps to clear memory: There are no steps to clear this data. |
| Type (Flash, EEPROM, etc.): TPM | Size: 16Kb (8x 2048 bit keys) | User Modifiable: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Function: Industry standard secure crypto-processor used for secure access and securing sensitive data. | Steps to clear memory: To clear the customer storage root key, CSRK, disable the TPM in the pre-boot menu. |
| Type (Flash, EEPROM, etc.): SPI Flash (2 devices) | Size: 4MB per device | User Modifiable: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | Function: Contains Encrypted Sensor Data. | Steps to clear memory: Data is encrypted, so there are no steps to clear this data. |

Mass Storage

| | | | | |
|---|----------------|---|--|--|
| Does the device contain mass storage memory (Hard Disk Drive, Tape Backup)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe the type, size, function, and steps to clear the memory below | | | | |
| Type (HDD, Tape, etc.): HDD | Size: 500GB | User Modifiable: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Function: Stores customer data, OS, applications digitally signed firmware images, persistent data, and temporary data used for processing and system functions | Steps to clear memory: There are several ways to erase this: 1. Secure Storage Erase - Erases temporary files and job data by overwriting information one or three times 2. Secure Disk Erase - Industry standard ATA Secure Erase. Overwrites all data on the hard drive. 3. Secure File Erase - Erases files when jobs finish processing by overwriting them one or three times. |

USB

| | | | | |
|---|--|--|--|--|
| Does the item accept USB input and if so, for what purpose (i.e. Print Jobs, device firmware updates, scan upload)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below | | | | |
| Print jobs, HP digitally signed firmware upgrades, 3rd party application loading. USB ports can be disabled. | | | | |

| |
|--|
| Can any data other than scan upload be sent to the USB device? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No If Yes please describe below |
| Diagnostic service logs can be uploaded. Print files can be printed via a USB thumb drive. |

| RF/RFID | |
|---|--------------------------------|
| Does the item use RF or RFID for receive or transmit of any data including remote diagnostics? (e.g. Cellular phone, Bluetooth) <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If Yes please describe below | |
| Purpose: | |
| Frequency: | Bandwidth: |
| Modulation: | Effective Radiate Power (ERP): |
| Specifications: | |

| Other Transmission Capabilities | |
|---|--------------------------------|
| Does the device employ any other methods of non-wired access to transmit or receive any data whatsoever (e.g. anything other than standard hard-wired TCP/IP, direct USB, or parallel connections)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If Yes please describe below: | |
| Purpose: | |
| Frequency: | Bandwidth: |
| Modulation: | Effective Radiate Power (ERP): |
| Specifications: | |

| Other Capabilities | |
|---|--|
| Does the device employ any other method of communications such as a Modem to transmit or receive any data whatsoever? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If Yes please describe below: | |
| Purpose: | |
| Specifications: | |

| Author Information | | | |
|-------------------------|--|----------------------------------|---------------------------|
| Name: Casey Campbell | Title: Hardware Technical Marketing Engineer | Email: casey.campbell1@hp.com | Business Unit: IPG |
| Signature: | | | Date Prepared: 03/22/2019 |

B Revision history

- [Revision history](#)

Revision history

Table B-1 Revision history

| Revision number | Revision date | Revision notes |
|-----------------|---------------|--|
| 2.0 | April 2019 | Added managed models. Updated DC controller connections on page 183 . Updated Diagrams: General circuit diagrams on page 206 . Added Manually unlock the front door on page 94 . Added "Revision history" section. |
| 1.0 | May 2017 | Troubleshooting manual initial release |

Index

Symbols/Numerics

- 1x550-sheet paper feeder controller PCA
 - connections, diagrams 190
- 2,000-sheet high-capacity input tray
 - clear jams 331
- 3-bin stapler/stacker
 - clear staple jams 341
- 550-sheet trays
 - jams 326

A

- AC to DC conversion 17
- accessories installed, information 217
- acoustic specifications 376
- automatic document feeder
 - scanning and image capture (M681/M682/E67550/E67560/E67650/E67660) 84

B

- Backup/Restore menu, control panel 281
- basic printer operation 4
- bias generation
 - high-voltage power supply 21
- black-only printing mode
 - primary transfer roller state 45
- blank pages
 - troubleshooting 344
- block diagram
 - cross section 177
 - external plug and port locations 196
 - printed circuit assembly (PCA)
 - connector locations 183
 - sensors and switches 173

C

- cables
 - USB, troubleshooting 344
- Calibration/Cleaning menu, control panel 281
- cartridge
 - developing unit engagement and disengagement 42
 - dynamic security 41
 - life detection 41
 - memory chip 41
 - presence detection 41
 - toner level detection 41
- cassette presence detection trays 3-5 65
- cautions iii
- certificates of volatility 379
- Channel partners support
 - HP Channel Services Network (CSN) v, 2, 92
- checklist
 - problems 97
 - wireless connectivity 349
- circuit diagrams 206
 - fuser temperature-control 24
 - high-voltage power supply 20
 - low-voltage power supply 17
- clean the paper path
 - cleaning page printing 304
- cleaning
 - glass 305
 - paper path 292, 304
 - printer 304
 - rollers document feeder (MFP only) 307
- clutch
 - paper feeder 64
- clutches
 - DC controller 15
- cold reset 353
- color
 - primary transfer roller state 45
- component test
 - special mode test 169
- components
 - DC controller 12
 - diagnostic tests 169
 - engine-control system 11
 - fuser 23
 - intermediate transfer belt (ITB) 44
 - paper feeder 64
 - pickup, feed, and delivery 50
 - toner cartridge 39
- configuration page
 - information 214
- configuration pages
 - information 217
- configuration report
 - printing 101
- connections
 - 1x550-sheet paper feeder controller PCA 190
 - DC controller 183
- control functions
 - fuser 24
- control panel 8
 - Backup/Restore menu 281
 - Calibration/Cleaning menu 281
 - connections diagram 183
 - Copy menu (MFP only) 256
 - Fax menu (fax models only) 276
 - Print menu 279
 - Reports menu 218
 - Scan menu (MFP only) 261
 - Service menu 289
 - Settings menu 221
 - Supplies menu 280

- Trays menu 281
- Troubleshooting menu 285
- USB Firmware Upgrade menu 284
- control panel diagnostic flowcharts 147
- control panel menus 218
- conventions, document iii
- cooling
 - areas and fans 14
- Copy menu (MFP only), control panel 256
- counts 352
 - page, reset 352
 - refurbish cycle 353
 - reset after replacing formatter 352
 - See also* pages counts
- CPU 9
- cross section
 - block diagram 177
- current settings pages 102

D

- date
 - codes for firmware 217
 - manufacture 216
 - product first used 353
- DC controller
 - clutches 15
 - components 12
 - connections, diagrams 183
 - fans 14
 - motors 13
 - sensors 16
 - solenoids 14
 - switches 15
- DC motors 13
- DC voltages converted from AC 17
- defeating
 - interlocks 158
- determine problem source 124
- determine the installed revision of firmware 362
- development process 35
- diagnostics
 - component 169
 - engine 156
 - LED 153

- diagrams
 - block 173
 - circuit 206
 - DC controller connections 183
 - formatter connectors (M652/M653/E65050/E65060/E65150/E65160) 187
 - formatter connectors (M681/M682/E67550/E67560/E67650/E67660) 188
 - main assemblies (printer base) 198
 - motor and fans 200
 - printed circuit assemblies (PCAs; printer base) 203
 - rollers and pads (printer base) 202
 - timing 205
- dimensions, printer (M652/M653/E65050/E65060/E65150/E65160) 370
- dimensions, printer (M681/M682/E67550/E67560/E67650/E67660) 373
- document conventions iii
- document feeder
 - automatic document feeder (M681/M682/E67550/E67560/E67650/E67660) 84
 - jams 318
- document feeder rollers (MFP only)
 - cleaning 307
- drum cleaning 38
- duplex printing accessory
 - connections diagram 183
- duplexing unit
 - motors 13
- dynamic security 41

E

- electrical specifications 376
- embedded web server 364
- engine
 - diagnostics 156
 - test page 156
- engine power supply
 - connections diagram 183
- engine-control system
 - components 11

- envelope feeder
 - connections diagram 183
- event log 103
 - clear 353
 - clear using LCD control panel 104
 - clear using touchscreen control panel 104
 - information 217
- exhaust fans 14
- external plug and port locations
 - block diagram 196

F

- failure detection
 - laser scanner 28
 - low-voltage power supply 19
 - motors 13
- fans
 - connections diagram 183
 - DC controller 14
 - exhaust 14
 - intake 14
- Fax menu (fax models only), control panel 276
- fax problems
 - get help from WISE 368
- firmware
 - date codes 217
 - version information 216
- firmware, downloading new 361
- flatbed
 - scanning and image capture (M681/M682/E67550/E67560/E67650/E67660) 83
- flowcharts
 - troubleshooting 125
- formatter
 - connections diagram 183
 - resets after replacing 352
- formatter connectors (M652/M653/E65050/E65060/E65150/E65160)
 - diagrams 187
- formatter connectors (M681/M682/E67550/E67560/E67650/E67660)
 - diagrams 188
- formatter control system 7
- formatter lights 153
- fuser 23
 - components 23
 - connections diagram 183

- control functions 24
- control-circuit function 23
- identification 26
- jams 335
- life detection 26
- temperature control 24
- temperature protection 25
- See also* fusing and delivery unit
- fusing process 37

G

- General Settings menu, control panel 221
- glass, cleaning 305

H

- hardware integration pocket (HIP) is not functioning 152
- heartbeat LED 153
- heat control for fuser 24
- heaters
 - fuser 23
- high-voltage power supplies (HVPS) operations 20
- high-voltage power supply (HVPS)
 - bias generation 21
 - circuits 21
- home button is unresponsive 151
- HP Channel Services Network (CSN)
 - Channel partners support v, 2, 92
- HP embedded Jetdirect page 216
- HP Jetdirect print server
 - configuration page 216
 - lights 153
- HVPS (high-voltage power supplies) operations 20
- HVPS (high-voltage power supply)
 - bias generation 21
 - circuits 21

I

- I/O interfaces 9
- image capture system
 - scanning (M681/M682/E67550/E67560/E67650/E67660) 83
- image quality
 - check toner-cartridge status 291
- image-formation process
 - development process 35
 - drum cleaning 38
 - fusing process 37

- ITB cleaning 38
- laser-beam exposure 35
 - pre-exposure 34
 - primary charging 34
 - primary transfer process 36
 - secondary transfer process 36
 - separation process 37
- image-information process 29
- imaging drums
 - diagnostic test 160
- individual component diagnostics 153
- initial rotation period 5
- input/output interfaces 9
- installation
 - date calculation 353
 - verify for optional accessories 101, 214
- intake fans 14
- interlocks
 - defeating 158
- intermediate transfer belt (ITB)
 - cleaning mechanism 48
 - components 44
 - engagement and disengagement control 45
 - home position 45
 - operations 44
- internal test and information pages printing 214
- IPv4 information 216
- IPv6 information 216
- ITB (intermediate transfer belt)
 - cleaning mechanism 48
 - engagement and disengagement control 45
 - home position 45
 - operation 44
- ITB cleaning 38

J

- jams
 - 2,000-sheet high-capacity input tray 331
 - 550-sheet trays 326
 - auto-navigation 317
 - causes of 317
 - detection in 550-sheet paper feeder 67
 - diagnostic test for 161

- document feeder 318
- fuser 335
- output bin 338
- recovery 343
- right door 335
- sensor locations 314
- sensors and switches 1x550-sheet feeder 314, 315, 316
- sensors, printer 314
- stapler/stacker accessory 339
- staples in the 3-bin stapler/stacker 341
- Tray 1 320
- Tray 2 322
- Jetdirect print server
 - lights 153

K

- keyboard 8

L

- laser scanner
 - failure detection 28
 - operations 27
 - safety 28
- laser-beam exposure 35
- laser/scanner assembly
 - connections diagram 183
- last rotation period 6
- latent image formation 33
- LEDs. *See* lights
- lights
 - formatter 153
 - troubleshooting with 153
- low-voltage power supply (LVPS)
 - converted DC voltages 18
 - failure detection 19
 - operations 17
 - protection for components 19
 - stops and interruptions 18
- LVPS (low-voltage power supply)
 - converted DC voltages 18
 - failure detection 19
 - operations 17
 - protection for components 19
 - stops and interruptions 18

M

- main assemblies (printer base)
 - block diagram 198

- memory
 - toner cartridge 41
 - Memory Enhancement technology (MEt) 10
 - menu map 102
 - menus, control panel
 - Backup/Restore 281
 - Calibration/Cleaning 281
 - Copy (MFP only) 256
 - Fax (fax models only) 276
 - General Settings 221
 - Manage Trays 281
 - Print 279
 - Reports 218
 - Scan (MFP only) 261
 - Service 289
 - Supplies 280
 - Troubleshooting 285
 - USB Firmware Upgrade 284
 - model number 216
 - motor control
 - trays 3-5 64
 - motors
 - block diagram 200
 - connections diagram 183
 - DC controller 13
 - failure detection 13
 - paper feeder 64
 - stepping 13
 - movement of paper through printer. *See* pickup, feed, and delivery
 - multiple feed prevention
 - trays 3-5 65
- N**
- networks
 - HP embedded Jetdirect configuration page 216
 - no control panel sound 150
 - notes iii
- O**
- operating-environment range 377
 - operation
 - Sleep mode 7
 - operation sequence 5
 - operations
 - laser scanner 27
 - toner cartridge memory 41
 - output bin
 - clear jams 338
 - over-current protection 19
 - over-voltage protection 19
- P**
- pages
 - blank 344
 - not printing 344
 - printing slowly 344
 - pages count 352
 - reset 352
 - See also* counts
 - paper
 - default size reset 353
 - jam detection 67
 - jams 317
 - selecting 293
 - stop in path for testing 167
 - paper feeder
 - electrical components 64
 - paper handling
 - solve problems 309
 - paper jams
 - 2,000-sheet high-capacity input tray 331
 - 550-sheet trays 326
 - document feeder 318
 - fuser 335
 - output bin 338
 - right door 335
 - stapler/stacker accessory 339
 - Tray 1 320
 - Tray 2 322
 - paper movement
 - operation 50
 - paper path
 - diagnostic test 161
 - printer 50
 - stop movement for testing 167
 - paper pickup
 - trays 3-5 65
 - paper-path
 - test, sensors 162
 - password
 - Service menu PIN 352
 - periods of the operation sequence 5
 - pickup, feed, and delivery
 - components 50
 - overview 50
 - PJL (printer job language) 8
 - PML (printer management language) 8
 - port configuration information 216
 - power
 - consumption 376
 - power subsystem 126
 - power supply 17
 - connections diagram 183
 - troubleshooting 126
 - See also* low-voltage power supply; high-voltage power supply
 - power-on troubleshooting overview 126
 - power-save mode. *See* sleep settings
 - pre-boot menu options 105
 - pre-exposure process 34
 - primary charging process 34
 - primary transfer roller
 - engagement and disengagement control 45
 - Print menu, control panel 279
 - print quality
 - test pages 214
 - Print Test Page 235
 - printed circuit assemblies (PCAs; printer base)
 - block diagram 203
 - printed circuit assembly (PCA)
 - connector locations
 - block diagram 183
 - printer cold reset 355
 - printer dimensions 370
 - printer job language (PJL) 8
 - printer management language (PML) 8
 - printer resets 354
 - printer space requirements 376
 - printing
 - period in operation sequence 6
 - stop for testing 167
 - troubleshooting 344
- R**
- Reports menu, control panel 218
 - restore factory settings 354
 - restore the service ID 355
 - right door
 - jams 335

- rollers and pads (printer base)
 - block diagram 202
- S**
- safety
 - laser scanner 28
- Scan menu (MFP only), control panel 261
- scanner
 - glass cleaning 305
 - tests MFP 171
- scanning
 - image capture (M681/M682/E67550/E67560/E67650/E67660) 83
- secondary transfer processes 36
- security settings information 216
- sensors
 - block diagram 173
 - connections diagram 183
 - DC controller 16
 - diagnostic tests 162
 - paper feeder 64
 - tests, diagnostic sensor and paper path 161
 - tests, manual tray/bin 166
- separation process 37
- serial number 353
- service and support information
 - WISE and CSN v, 2, 92
- Service ID
 - convert to date 353
 - restore 353
- Service menu options 352
- Service menu, control panel 289
- service mode functions 352
- settings
 - restore factory 354
- Sleep mode
 - operation 7
- sleep settings 7
 - voltage too high during 19
- solenoids
 - DC controller 14
- solve performance problems 344
 - factors affecting print performance 344
 - print speeds 345
- product does not print or it prints slowly 345
- product prints slowly 345
- solve problems 91
 - output is curled or wrinkled 310
 - paper does not feed automatically 312
 - paper does not feed from Tray 2-X 310
 - paper handling 309
 - printer feeds incorrect page size 309
 - printer pulls from incorrect tray 309
 - printer will not duplex or duplexes incorrectly 309
 - product does not pick up paper 311
 - product does not pick up paper or misfeeds 311
 - product picks up multiple sheets of paper 312
- space requirements, printer 376
- specifications
 - electrical and acoustic 376
 - space requirements 376
- standby period 5
- staple jams
 - 3-bin stapler/stacker 341
- stapler/stacker accessory
 - clear jams 339
- stepping motors 13
- stop printing for test 167
- sub-voltage
 - low-voltage power supply circuit 18
- Supplies menu, control panel 280
- switches
 - block diagram 173
 - connections diagram 183
 - DC controller 15
 - paper feeder 64
- T**
- TCP/IP information 216
- temperature
 - control for fuser 24
 - fuser heater protection 25
- tests
 - component tests list and descriptions 170
 - disable cartridge check 160
 - engine 156
 - paper path 161
 - paper path and sensor diagnostic 161
 - paper-path sensors 162
 - print/stop 167
 - scanner MFP 171
 - scanner tests 171
 - tray/bin manual sensor 166
- thermistors
 - fuser 24
- thermoswitches
 - fuser 24
- timing chart 205
- tips iii
- toner
 - image formation, use during 33
- toner cartridge
 - developing unit engagement and disengagement 42
 - dynamic security 41
 - life detection 41
 - memory chip 41
 - presence detection 41
 - toner level detection 41
- toner cartridges 39
 - components 39
 - diagnostic test 160
 - error conditions 39
 - operations 39
- touchscreen blank, white, or dim (no image) 148
- touchscreen control panel 8
- touchscreen has an unresponsive zone 149
- transfer processes 36
- transfer roller
 - engagement and disengagement control 45
- transfer unit
 - operation 44
- tray
 - lift operation 66
- Tray 1
 - jams 320

- Tray 2
 - jams 322
- tray selection - use requested tray 236
- trays 3-5
 - cassette lift operation 66
 - motor control 64
 - multiple feed prevention 65
 - paper pickup 65
 - tray presence detection 65
- trays 3-6
 - jam detection 67
- Trays menu, control panel 281
- troubleshooting 91
 - blank pages 344
 - check toner-cartridge status 291
 - checklist 97
 - clean the paper path 304
 - configuration pages for 101
 - control panel checks 129
 - flowchart 125
 - Internal test and information pages 214
 - jams 314, 317
 - lights, using 153
 - network problems 347
 - pages not printing 344
 - pages printing slowly 344
 - power 126
 - process 124
 - scanner calibration 152
 - scanning subsystem (MFP) 152
 - USB cables 344
 - wired network 347
 - wireless network 349
- Troubleshooting menu, control panel 285

U

- understand lights on the formatter
 - formatter lights 153
- understand the lights on the formatter
 - heartbeat LED 153
 - HP Jetdirect LEDs 156
- upgrade firmware 364
- upgrades, downloading product
 - firmware 361
- USB Firmware Upgrade menu, control panel 284

- USB flash drive
 - firmware upgrade, control panel 365
 - firmware upgrade, pre-boot menu 366
- USB port
 - troubleshooting 344
- Use Requested Tray 236

V

- version, hardware firmware 216

W

- waiting period 5
- warnings iii
- warranty date information 353
- Web-based Interactive Search Engine
 - WISE v, 2, 92
- weight, printer (M652/M653/E65050/E65060/E65150/E65160) 370
- weight, printer (M681/M682/E67550/E67560/E67650/E67660) 373
- wireless network
 - troubleshooting 349
- wireless network interference 351
- WISE
 - solve fax problems 368
 - Web-based Interactive Search Engine v, 2, 92