



## *Service Manual*

**Lexmark™ E250d and E250dn**

---

**4512-220**

**4512-230**

- ***Table of contents***
- ***Start diagnostics***
- ***Safety and notices***
- ***Trademarks***
- ***Index***



Lexmark and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

**Edition: May 15, 2007**

**The following paragraph does not apply to any country where such provisions are inconsistent with local law:**

LEXMARK INTERNATIONAL, INC. PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions; therefore, this statement may not apply to you.

This publication could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in later editions. Improvements or changes in the products or the programs described may be made at any time.

Comments may be addressed to Lexmark International, Inc., Department D22A/032-2, 740 West New Circle Road, Lexington, Kentucky 40550, U.S.A or e-mail at [ServiceInfoAndTraining@Lexmark.com](mailto:ServiceInfoAndTraining@Lexmark.com). Lexmark may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

References in this publication to products, programs, or services do not imply that the manufacturer intends to make these available in all countries in which it operates. Any reference to a product, program, or service is not intended to state or imply that only that product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any existing intellectual property right may be used instead. Evaluation and verification of operation in conjunction with other products, programs, or services, except those expressly designated by the manufacturer, are the user's responsibility.

Lexmark, Lexmark with diamond design, MarkNet, and MarkVision are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

PictureGrade a trademark of Lexmark International, Inc.

PCL® is a registered trademark of the Hewlett-Packard Company.

All other trademarks are the property of their respective owners.

**© 2006 Lexmark International, Inc.**  
**All rights reserved.**

#### **UNITED STATES GOVERNMENT RIGHTS**

This software and any accompanying documentation provided under this agreement are commercial computer software and documentation developed exclusively at private expense.

# Table of contents

<b>Table of contents</b>	<b>iii</b>
<b>Notices and safety information</b>	<b>vii</b>
Laser notice	vii
Safety information	xi
<b>Preface</b>	<b>xiv</b>
Definitions	xiv
<b>General information</b>	<b>1-1</b>
Models	1-1
Maintenance approach	1-1
Overview of the operator panel	1-2
Models E250d and E250dn	1-2
Specifications	1-3
Memory	1-3
Print speed	1-3
Print quality	1-3
Media trays and supply capacity	1-4
Connectivity and compatibility	1-5
Types of print media	1-6
Tips on preventing jams	1-7
Paper path	1-7
Tools	1-8
Acronyms	1-9
<b>Diagnostic information</b>	<b>2-1</b>
Start	2-1
Power-On Self Test (POST) sequence	2-2
Light patterns and error messages	2-2
Common primary light patterns	2-3
Primary codes	2-4
Ready/Power Saver	2-4
Busy	2-4
Hex Trace Ready	2-4
Waiting	2-5
Flushing/Resolution reduced	2-5
Not ready	2-5
Close door	2-6
Insufficient collation area/Insufficient memory	2-6
Cancel job/Reset printer	2-6
Load print media	2-7
Load manual feeder	2-7
Toner low	2-7
Toner cartridge region mismatch	2-8
Photoconductor kit life warning	2-8
Replace photoconductor (printer hard stop)	2-8
Programming engine code/Programming system code	2-9
Invalid engine code/Invalid network code	2-9
Service error	2-9
Printer error	2-10
Paper jam printer error	2-10
Short media	2-10
Output bin full	2-11

<b>Common secondary light patters</b>	<b>2-12</b>
<b>Secondary error codes</b>	<b>2-14</b>
Paper jam at the input sensor	2-14
Paper jam in the manual feeder	2-14
Paper jams between the input and exit sensors	2-14
Paper jams as a printed job exits the printer	2-14
Paper jam in the 250-sheet tray	2-15
Paper jam in the 550-sheet drawer	2-15
Paper jam (duplex)	2-15
Paper jam (duplex front)	2-15
Paper jam (duplex rear)	2-16
Paper jam (duplex - unknown location)	2-16
Paper jam (duplex - unsupported size)	2-16
Complex page	2-17
Insufficient collation area	2-17
Network interface errors	2-18
Resource save off - deficient memory	2-18
Font error	2-18
Insufficient defrag memory	2-19
ENA connection lost	2-19
Host interface disabled	2-19
Memory full	2-20
Short media	2-20
Invalid engine code	2-20
Invalid network code	2-21
Toner cartridge region mismatch	2-21
Change toner cartridge/invalid refill	2-21
Missing/Defective toner cartridge	2-22
Unsupported toner cartridge	2-22
Too many options attached	2-22
Unsupported flash option	2-23
<b>Service codes</b>	<b>2-23</b>
Service primary code	2-24
Service secondary error codes	2-24
Service tertiary error codes	2-25
Controller software	2-25
Transfer roll or tray 2	2-25
Fuser, fan, or toner sensor error	2-26
Printhead, transport motor, or RIP/engine communication error	2-27
NVRAM failure	2-28
Network error	2-28
<b>Messages and error codes</b>	<b>2-29</b>
User attendance messages	2-29
Paper jam error codes	2-29
Service error codes	2-33
Diagram of the printer menus	2-36
<b>Symptom tables</b>	<b>2-37</b>
POST symptom table	2-37
Printer symptom table	2-38
<b>Service checks</b>	<b>2-39</b>
Controller card service check	2-39
Cooling fan service check	2-40
Cover interlock switch service check	2-40
Dead machine service check	2-41
Fuser service check	2-41
LVPS/HVPS service check	2-42
Main motor service check	2-42
Operator panel service check	2-43

<b>Paper feed service checks</b>	<b>2-43</b>
Paper jam error indication during POST	2-43
Media picks during POST and/or continuously	2-43
Media picks but stops halfway through the printer	2-44
Media never picks	2-44
Media occasionally mispicks or picks multiple sheets at once	2-44
Media skews	2-45
Media “trees,” wrinkles, stacks poorly, or curls	2-45
<b>Parallel or USB port service check</b>	<b>2-45</b>
<b>Print quality service checks</b>	<b>2-46</b>
Blank page	2-46
Black page	2-47
Heavy background	2-47
Partial blank image/white spots (no repeating pattern)	2-48
Variation in image density horizontally across page	2-48
Poor fusing of image	2-48
Light print	2-49
White or black lines or bands	2-49
Toner on back of page	2-49
Solving print quality problems	2-50
<b>Printhead service check</b>	<b>2-53</b>
<b>Transfer roll service check</b>	<b>2-53</b>
<b>Diagnostic aids</b>	<b>3-1</b>
<b>Accessing service menus</b>	<b>3-1</b>
<b>Printing menus</b>	<b>3-1</b>
<b>Moving around the menu</b>	<b>3-1</b>
Configuration Menu printout sample	3-2
Diagnostics mode printout sample	3-3
<b>Configuration menu selections</b>	<b>3-4</b>
<b>Utilities</b>	<b>3-4</b>
<b>Setup</b>	<b>3-5</b>
<b>Parallel</b>	<b>3-5</b>
<b>USB</b>	<b>3-6</b>
<b>Network</b>	<b>3-7</b>
<b>Diagnostics mode selections</b>	<b>3-8</b>
<b>Adjustment procedures</b>	<b>3-9</b>
Printhead assembly electronic adjustment	3-9
Printhead assembly mechanical adjustment	3-13
<b>Repair information</b>	<b>4-1</b>
<b>Handling ESD-sensitive parts</b>	<b>4-1</b>
<b>Removal procedures</b>	<b>4-1</b>
Front access cover removal	4-2
Left side cover removal	4-4
Right side cover removal	4-5
Rear cover removal	4-6
Top cover removal	4-7
Auto comp removal	4-9
Auto comp clutch removal	4-10
Auto comp drive shaft assembly removal	4-11
Bezel removal	4-12
Controller card removal	4-13
Cover open sensor removal	4-15
Developer drive coupling assembly removal	4-16
Duplex removal	4-18
Duplex gear drive	4-20

Fan removal	4-21
Flag removal (top cover right)	4-21
Fuser removal	4-22
Fuser power cable removal	4-24
Link developer drive and access door removal	4-25
LVPS/HVPS card assembly removal	4-26
Main motor drive removal	4-28
Manual feed sensor removal	4-30
Manual paper feed clutch	4-31
Manual feed solenoids	4-32
Media level indicator removal	4-33
Narrow media sensor removal	4-35
Operator panel removal	4-36
Paper exit guide assembly removal	4-37
Paper feed rollers (autocompensator tires) removal	4-38
Paper input and duplex sensor removal	4-39
Printhead removal	4-40
Reversing solenoid removal	4-41
Toner level sensor removal	4-41
Transfer roll removal	4-42
Tray 2 auto comp tire removal	4-43
Upper front frame group removal	4-44
Wear strip removal (tray 1)	4-46
Wear strip removal (tray 2)	4-46
<b>Locations and connections</b>	<b>5-1</b>
<b>Locations</b>	<b>5-1</b>
Front view	5-1
Rear view	5-1
Controller card connector pin values	5-2
<b>Connectors</b>	<b>5-4</b>
<b>Preventive maintenance</b>	<b>6-1</b>
Safety inspection guide	6-1
Lubrication specifications	6-1
Maintenance kits	6-1
<b>Parts Catalog</b>	<b>7-1</b>
How to use this parts catalog	7-1
Assembly 1: Covers	7-2
Assembly 2: Electronics	7-4
Assembly 3: Frame	7-6
Assembly 4: Options	7-8
Assembly 5: Power cords	7-9
<b>Index</b>	<b>I-1</b>
<b>Part number index</b>	<b>I-5</b>

---

## Notices and safety information

The following laser notice labels may be affixed to this printer as shown:

---

### Laser notice

The printer is certified in the U.S. to conform to the requirements of DHHS 21 CFR Subchapter J for Class I (1) laser products, and elsewhere is certified as a Class I laser product conforming to the requirements of IEC 60825-1.

Class I laser products are not considered to be hazardous. The printer contains internally a Class IIIb (3b) laser that is nominally a 5 milliwatt gallium arsenide laser operating in the wavelength region of 770-795 nanometers. The laser system and printer are designed so there is never any human access to laser radiation above a Class I level during normal operation, user maintenance, or prescribed service condition.

---

### Laser

Der Drucker erfüllt gemäß amtlicher Bestätigung der USA die Anforderungen der Bestimmung DHHS (Department of Health and Human Services) 21 CFR Teil J für Laserprodukte der Klasse I (1). In anderen Ländern gilt der Drucker als Laserprodukt der Klasse I, der die Anforderungen der IEC (International Electrotechnical Commission) 60825-1 gemäß amtlicher Bestätigung erfüllt.

Laserprodukte der Klasse I gelten als unschädlich. Im Inneren des Druckers befindet sich ein Laser der Klasse IIIb (3b), bei dem es sich um einen Galliumarsenlaser mit 5 Milliwatt handelt, der Wellen der Länge 770-795 Nanometer ausstrahlt. Das Lasersystem und der Drucker sind so konzipiert, daß im Normalbetrieb, bei der Wartung durch den Benutzer oder bei ordnungsgemäßer Wartung durch den Kundendienst Laserbestrahlung, die Klasse I übersteigen würde, Menschen keinesfalls erreicht.

---

### Avis relatif à l'utilisation de laser

Pour les Etats-Unis : cette imprimante est certifiée conforme aux provisions DHHS 21 CFR alinéa J concernant les produits laser de Classe I (1). Pour les autres pays : cette imprimante répond aux normes IEC 60825-1 relatives aux produits laser de Classe I.

Les produits laser de Classe I sont considérés comme des produits non dangereux. Cette imprimante est équipée d'un laser de Classe IIIb (3b) (arséniure de gallium d'une puissance nominale de 5 milliwatts) émettant sur des longueurs d'onde comprises entre 770 et 795 nanomètres. L'imprimante et son système laser sont conçus pour impossible, dans des conditions normales d'utilisation, d'entretien par l'utilisateur ou de révision, l'exposition à des rayonnements laser supérieurs à des rayonnements de Classe I.

---

### Avvertenze sui prodotti laser

Questa stampante è certificata negli Stati Uniti per essere conforme ai requisiti del DHHS 21 CFR Sottocapitolo J per i prodotti laser di classe 1 ed è certificata negli altri Paesi come prodotto laser di classe 1 conforme ai requisiti della norma CEI 60825-1.

I prodotti laser di classe non sono considerati pericolosi. La stampante contiene al suo interno un laser di classe IIIb (3b) all'arseniuro di gallio della potenza di 5mW che opera sulla lunghezza d'onda compresa tra 770 e 795 nanometri. Il sistema laser e la stampante sono stati progettati in modo tale che le persone a contatto con la stampante, durante il normale funzionamento, le operazioni di servizio o quelle di assistenza tecnica, non ricevano radiazioni laser superiori al livello della classe 1.

---

## Avisos sobre el láser

Se certifica que, en los EE.UU., esta impresora cumple los requisitos para los productos láser de Clase I (1) establecidos en el subcapítulo J de la norma CFR 21 del DHHS (Departamento de Sanidad y Servicios) y, en los demás países, reúne todas las condiciones expuestas en la norma IEC 60825-1 para productos láser de Clase I (1).

Los productos láser de Clase I no se consideran peligrosos. La impresora contiene en su interior un láser de Clase IIIb (3b) de arseniuro de galio de funcionamiento nominal a 5 milivatios en una longitud de onda de 770 a 795 nanómetros. El sistema láser y la impresora están diseñados de forma que ninguna persona pueda verse afectada por ningún tipo de radiación láser superior al nivel de la Clase I durante su uso normal, el mantenimiento realizado por el usuario o cualquier otra situación de servicio técnico.

---

## Declaração sobre Laser

A impressora está certificada nos E.U.A. em conformidade com os requisitos da regulamentação DHHS 21 CFR Subcapítulo J para a Classe I (1) de produtos laser. Em outros locais, está certificada como um produto laser da Classe I, em conformidade com os requisitos da norma IEC 60825-1.

Os produtos laser da Classe I não são considerados perigosos. Internamente, a impressora contém um produto laser da Classe IIIb (3b), designado laser de arseneto de potássio, de 5 milliwatts, operando numa faixa de comprimento de onda entre 770 e 795 nanómetros. O sistema e a impressora laser foram concebidos de forma a nunca existir qualquer possibilidade de acesso humano a radiação laser superior a um nível de Classe I durante a operação normal, a manutenção feita pelo utilizador ou condições de assistência prescritas.

---

## Laserinformatie

De printer voldoet aan de eisen die gesteld worden aan een laserprodukt van klasse I. Voor de Verenigde Staten zijn deze eisen vastgelegd in DHHS 21 CFR Subchapter J, voor andere landen in IEC 60825-1.

Laserprodukten van klasse I worden niet als ongevaarlijk aangemerkt. De printer is voorzien van een laser van klasse IIIb (3b), dat wil zeggen een gallium arsenide-laser van 5 milliwatt met een golflengte van 770-795 nanometer. Het lasergedeelte en de printer zijn zo ontworpen dat bij normaal gebruik, bij onderhoud of reparatie conform de voorschriften, nooit blootstelling mogelijk is aan laserstraling boven een niveau zoals voorgeschreven is voor klasse 1.

---

## Lasermeddelelse

Printeren er godkendt som et Klasse I-laserprodukt, i overensstemmelse med kravene i IEC 60825-1.

Klasse I-laserprodukter betragtes ikke som farlige. Printeren indeholder internt en Klasse IIIB (3b)-laser, der nominelt er en 5 milliwatt galliumarsenid laser, som arbejder på bølglængdeområdet 770-795 nanometer. Lasersystemet og printeren er udformet således, at mennesker aldrig udsættes for en laserstråling over Klasse I-niveau ved normal drift, brugervedligeholdelse eller obligatoriske servicebetingelser.



---

## Huomautus laserlaitteesta

Tämä kirjoitin on Yhdysvalloissa luokan I (1) laserlaitteiden DHHS 21 CFR Subchapter J -määrityksen mukainen ja muualla luokan I laserlaitteiden IEC 60825-1 -määrityksen mukainen.

Luokan I laserlaitteiden ei katsota olevan vaarallisia käyttäjälle. Kirjoittimessa on sisäinen luokan IIIb (3b) 5 milliwatin galliumarsenidilaser, joka toimii aaltoalueella 770 - 795 nanometriä. Laserjärjestelmä ja kirjoitin on suunniteltu siten, että käyttäjä ei altistu luokan I määrätyksiä voimakkaammalle säteilylle kirjoittimen normaalin toiminnan, käyttäjän tekemien huoltotoimien tai muiden huoltotoimien yhteydessä.

VARO! Avattaessa ja suojalukitus ohitettaessa olet alttiina näkymättömälle lasersäteilylle. Älä katso säteeseen.

VARNING! Osynlig laserstrålning när denna del är öppnad och spärren är urkopplad. Betrakta ej strålen.

---

## Laser-notis

Denna skrivare är i USA certifierad att motsvara kraven i DHHS 21 CFR, underparagraf J för laserprodukter av Klass I (1). I andra länder uppfyller skrivaren kraven för laserprodukter av Klass I enligt kraven i IEC 60825-1.

Laserprodukter i Klass I anses ej hälsovådliga. Skrivaren har en inbyggd laser av Klass IIIb (3b) som består av en laserenhet av gallium-arsenid på 5 milliwatt som arbetar i våglängdsområdet 770-795 nanometer.

Lasersystemet och skrivaren är utformade så att det aldrig finns risk för att någon person utsätts för laserstrålning över Klass I-nivå vid normal användning, underhåll som utförs av användaren eller annan föreskriven serviceåtgärd.

---

## Laser-melding

Skriveren er godkjent i USA etter kravene i DHHS 21 CFR, underkapittel J, for klasse I (1) laserprodukter, og er i andre land godkjent som et Klasse I-laserprodukt i samsvar med kravene i IEC 60825-1.

Klasse I-laserprodukter er ikke å betrakte som farlige. Skriveren inneholder internt en klasse IIIb (3b)-laser, som består av en gallium-arsenlaserenhet som avgir stråling i bølglengdeområdet 770-795 nanometer.

Lasersystemet og skriveren er utformet slik at personer aldri utsettes for laserstråling ut over klasse I-nivå under vanlig bruk, vedlikehold som utføres av brukeren, eller foreskrevne serviceoperasjoner.

---

## Avís sobre el Làser

Segons ha estat certificat als Estats Units, aquesta impressora compleix els requisits de DHHS 21 CFR, apartat J, pels productes làser de classe I (1), i segons ha estat certificat en altres llocs, és un producte làser de classe I que compleix els requisits d'IEC 60825-1.

Els productes làser de classe I no es consideren perillosos. Aquesta impressora conté un làser de classe IIIb (3b) d'arseniür de gal.li, nominalment de 5 mil.liwats, i funciona a la regió de longitud d'ona de 770-795 nanòmetres. El sistema làser i la impressora han sigut concebuts de manera que mai hi hagi exposició a la radiació làser per sobre d'un nivell de classe I durant una operació normal, durant les tasques de manteniment d'usuari ni durant els serveis que satisfacin les condicions prescrites.

---

レーザーに関するお知らせ

このプリンターは、米国ではDHHS 21 CFRサブチャプター J のクラス I (1) の基準を満たしたレーザー製品であることが証明されています。また米国以外ではIEC 825の基準を満たしたクラス I のレーザー製品であることが証明されています。

クラス I のレーザー製品には危険性はないと考えられています。このプリンターはクラス III b (3 b) のレーザーを内蔵しています。このレーザーは、波長が770 ~ 795ナノメートルの範囲で、通常5ミリワットのガリウム砒化物を放射するレーザーです。このレーザーシステムとプリンターは、通常の操作、ユーザのメンテナンス、規定された修理においては、人体がクラス I のレベル以上のレーザー放射に晒されることのないよう設計されています。

---

注意：

本打印机被美国认证合乎 DHHS 21 CFR Subchapter I 对分类 I (1) 激光产品的标准，而在其他地区则被认证合乎 IEC 825 的标准。

分类 I 激光产品一般认为不具危险性，本打印机内部含有分类 IIIb (3b) 的激光，在操作过程中会产生 5 毫瓦含镓及砷的微量激光，其波长范围在 770-795 nm 之间。本激光系统及打印机的设计，在一般操作、使用者维护或规定内的维修情况下，不会使人体接触分类 I 以上等级的辐射。


---

본프린터는 1등급 레이저 제품들에 대한 DHHS 21 CFR Subchapter 3의 규정을 준수하고 있음을 미국에서 인증받았으며, 그외의 나라에서도 IEC 825 규정을 준수하는 1등급 레이저 제품으로서 인증을 받았습니다.

1등급 레이저 제품들은 안전한 것으로 간주됩니다. 본 프린터는 5 밀리와트 갈륨 아르세나이드 레이저로서 770-795 나노미터의 파장대에서 활동하는 Class III (3b) 레이저를 내부에 갖고 있습니다. 본 레이저 시스템과 프린터는 정상 작동 중이나 유지 보수 중 또는 규정된 서비스 상태에서 상기의 Class I 수준의 레이저 방출에 사람이 절대 접근할 수 없도록 설계되어 있습니다.


---

## Safety information

- The safety of this product is based on testing and approvals of the original design and specific components. The manufacturer is not responsible for safety in the event of use of unauthorized replacement parts.
- The maintenance information for this product has been prepared for use by a professional service person and is not intended to be used by others.
- There may be an increased risk of electric shock and personal injury during disassembly and servicing of this product. Professional service personnel should understand this and take necessary precautions.
-  **CAUTION:** When you see this symbol, there is a danger from hazardous voltage in the area of the product where you are working. Unplug the product before you begin, or use caution if the product must receive power in order to perform the task.


---

## Consignes de sécurité


- La sécurité de ce produit repose sur des tests et des agrégations portant sur sa conception d'origine et sur des composants particuliers. Le fabricant n'assume aucune responsabilité concernant la sécurité en cas d'utilisation de pièces de rechange non agréées.
- Les consignes d'entretien et de réparation de ce produit s'adressent uniquement à un personnel de maintenance qualifié.
- Le démontage et l'entretien de ce produit pouvant présenter certains risques électriques, le personnel d'entretien qualifié devra prendre toutes les précautions nécessaires.
-  **ATTENTION :** Ce symbole indique la présence d'une tension dangereuse dans la partie du produit sur laquelle vous travaillez. Débranchez le produit avant de commencer ou faites preuve de vigilance si l'exécution de la tâche exige que le produit reste sous tension.

---


## Norme di sicurezza

- La sicurezza del prodotto si basa sui test e sull'approvazione del progetto originale e dei componenti specifici. Il produttore non è responsabile per la sicurezza in caso di sostituzione non autorizzata delle parti.
- Le informazioni riguardanti la manutenzione di questo prodotto sono indirizzate soltanto al personale di assistenza autorizzato.
- Durante lo smontaggio e la manutenzione di questo prodotto, il rischio di subire scosse elettriche e danni alla persona è più elevato. Il personale di assistenza autorizzato deve, quindi, adottare le precauzioni necessarie.
-  **ATTENZIONE:** Questo simbolo indica la presenza di tensione pericolosa nell'area del prodotto. Scollegare il prodotto prima di iniziare o usare cautela se il prodotto deve essere alimentato per eseguire l'intervento.


## Sicherheitshinweise

- Die Sicherheit dieses Produkts basiert auf Tests und Zulassungen des ursprünglichen Modells und bestimmter Bauteile. Bei Verwendung nicht genehmigter Ersatzteile wird vom Hersteller keine Verantwortung oder Haftung für die Sicherheit übernommen.
- Die Wartungsinformationen für dieses Produkt sind ausschließlich für die Verwendung durch einen Wartungsfachmann bestimmt.
- Während des Auseinandernehmens und der Wartung des Geräts besteht ein zusätzliches Risiko eines elektrischen Schlags und körperlicher Verletzung. Das zuständige Fachpersonal sollte entsprechende Vorsichtsmaßnahmen treffen.
-  **ACHTUNG:** Dieses Symbol weist auf eine gefährliche elektrische Spannung hin, die in diesem Bereich des Produkts auftreten kann. Ziehen Sie vor den Arbeiten am Gerät den Netzstecker des Geräts, bzw. arbeiten Sie mit großer Vorsicht, wenn das Produkt für die Ausführung der Arbeiten an den Strom angeschlossen sein muß.


## Pautas de Seguridad

- La seguridad de este producto se basa en pruebas y aprobaciones del diseño original y componentes específicos. El fabricante no es responsable de la seguridad en caso de uso de piezas de repuesto no autorizadas.
- La información sobre el mantenimiento de este producto está dirigida exclusivamente al personal cualificado de mantenimiento.
- Existe mayor riesgo de descarga eléctrica y de daños personales durante el desmontaje y la reparación de la máquina. El personal cualificado debe ser consciente de este peligro y tomar las precauciones necesarias.
-  **PRECAUCIÓN:** este símbolo indica que el voltaje de la parte del equipo con la que está trabajando es peligroso. Antes de empezar, desenchufe el equipo o tenga cuidado si, para trabajar con él, debe conectarlo.


## Informações de Segurança

- A segurança deste produto baseia-se em testes e aprovações do modelo original e de componentes específicos. O fabricante não é responsável pela segurança, no caso de uso de peças de substituição não autorizadas.
- As informações de segurança relativas a este produto destinam-se a profissionais destes serviços e não devem ser utilizadas por outras pessoas.
- Risco de choques eléctricos e ferimentos graves durante a desmontagem e manutenção deste produto. Os profissionais destes serviços devem estar avisados deste facto e tomar os cuidados necessários.
-  **CUIDADO:** Quando vir este símbolo, existe a possível presença de uma potencial tensão perigosa na zona do produto em que está a trabalhar. Antes de começar, desligue o produto da tomada eléctrica ou seja cuidadoso caso o produto tenha de estar ligado à corrente eléctrica para realizar a tarefa necessária.


## Informació de Seguretat

- La seguretat d'aquest producte es basa en l'avaluació i aprovació del disseny original i els components específics.  
El fabricant no es fa responsable de les qüestions de seguretat si s'utilitzen peces de recanvi no autoritzades.
- La informació pel manteniment d'aquest producte està orientada exclusivament a professionals i no està destinada a ningú que no ho sigui.
- El risc de xoc elèctric i de danys personals pot augmentar durant el procés de desmuntatge i de servei d'aquest producte. El personal professional ha d'estar-ne assabentat i prendre les mesures convenients.
-  **PRECAUCIÓ:** aquest símbol indica que el voltatge de la part de l'equip amb la qual esteu treballant és perillós. Abans de començar, desendolieu l'equip o extremeu les precaucions si, per treballar amb l'equip, l'heu de connectar.

## 안전 사항

- 본 제품은 원래 설계 및 특정 구성품에 대한 테스트 결과로 안정성이 입증된 것입니다. 따라서 무허가 교체부품을 사용하는 경우에는 제조업체에서 안전에 대한 책임을 지지 않습니다.
- 본 제품에 관한 유지 보수 설명서는 전문 서비스 기술자 용으로 작성된 것이므로, 비전문가는 사용할 수 없습니다.
- 본 제품을 해체하거나 정비할 경우, 전기적인 충격을 받거나 상처를 입을 위험이 커집니다. 전문 서비스 기술자는 이 사실을 숙지하고, 필요한 예방 조치를 취하도록 하십시오.
-  **주의:** 이 표시는 해당영역에서 고압전류가 흐른다는 위험 표시입니다. 시작전에 플러그를 뽑으시거나, 주의를 기울여 주시기 바랍니다.

## 安全信息

- 本产品的安全性以原来设计和特定产品的测试结果和认证为基础。万一使用未经许可的替换部件，制造商不对安全性负责。
- 本产品的维护信息仅供专业服务人员使用，并不打算让其他人使用。
- 本产品在拆卸、维修时，遭受电击或人员受伤的危险性会增高，专业服务人员对这点必须有所了解，并采取必要的预防措施。
-  **切记:** 当您看到此符号时，说明在您工作的产品区域有危险电压的存在。请在开始操作前拔掉产品的电源线，或者在产品必须使用电源来执行任务时，小心从事。

---

## Preface

This manual contains maintenance procedures for service personnel. It is divided into the following chapters:

1. **General information** contains a general description of the printer and the maintenance approach used to repair it. Special tools and test equipment are, as well as general environmental and safety instructions.
  2. **Diagnostic information** contains an error indicator table, symptom tables, and service checks used to isolate failing field replaceable units (FRUs).
  3. **Diagnostic aids** contains tests and checks used to locate or repeat symptoms of printer problems.
  4. **Repair information** provides instructions for making printer adjustments and removing and installing FRUs.
  5. **Connector locations** uses illustrations to identify the connector locations and test points on the printer.
  6. **Preventive maintenance** contains the lubrication specifications and recommendations to prevent problems.
  7. **Parts catalog** contains illustrations and part numbers for individual FRUs.
- Appendix A** contains service tips and information.  
**Appendix B** contains representative print samples.

---

## Definitions

**Note:** A note provides additional information.

**Warning:** A warning identifies something that might damage the product hardware or software.

**CAUTION:** A caution identifies something that might cause a servicer harm.



**CAUTION:** When you see this symbol, there is a danger from hazardous voltage in the area of the product where you are working. Unplug the product before you begin, or use caution if the product must receive power in order to perform the task.

---

## 1. General information


The Lexmark™ E250d and E250dn are monochrome laser printers designed for single users or small workgroups. This book contains information on E250n and E250dn. For information on E352dn, see the 4512-430 service manual.

---

### Models

There are two models covered in this manual:

- E250d—16MB memory standard, a parallel USB (universal serial bus) connector, ENA support for USB and/or parallel ports, and prints 30 pages per minute on letter-size paper (29 ppm on A4, 25ppm on legal).
- E250dn—32MB memory standard, a parallel USB (universal serial bus) connector, ENA support for USB and/or parallel ports, and prints 30 pages per minute on letter-size media (29 ppm on A4, 25ppm on legal).

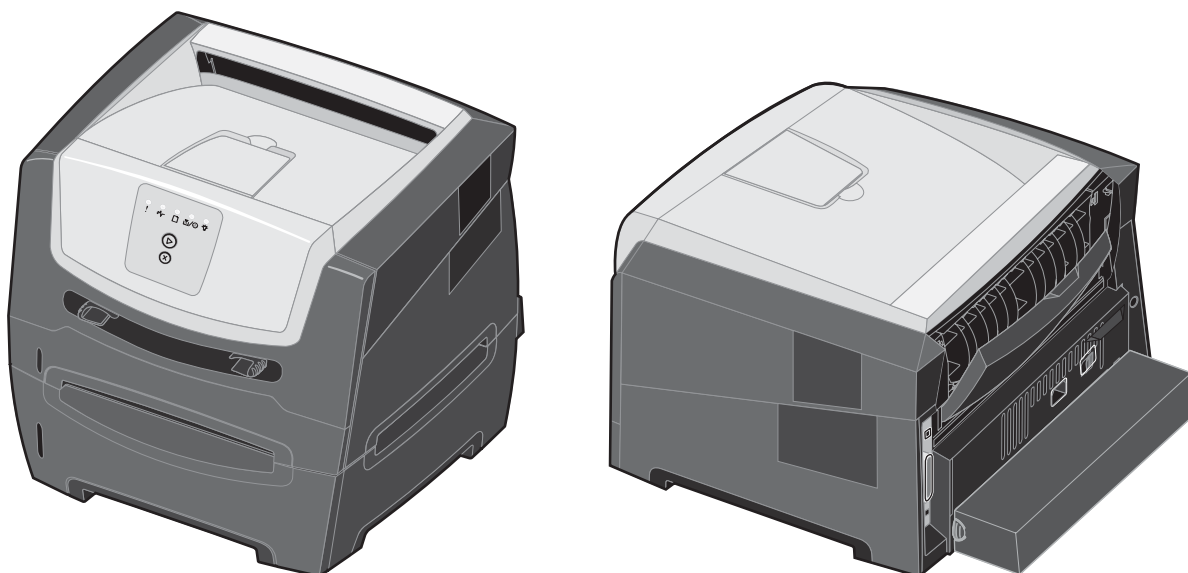

---

### Maintenance approach


The diagnostic information in this manual leads to the correct field replaceable unit (FRU) or part. Use the error code charts, symptom index, and service checks to determine the symptom and repair the failure. See **“Diagnostic information” on page 2-1** for more information. See **“Repair information” on page 4-1** to help identify parts. After completing the repair, perform tests as needed to verify the repair.

---

## Overview of the operator panel

### Models E250d and E250dn

These models have the LED operator panel. The operator panel has five lights and two buttons.

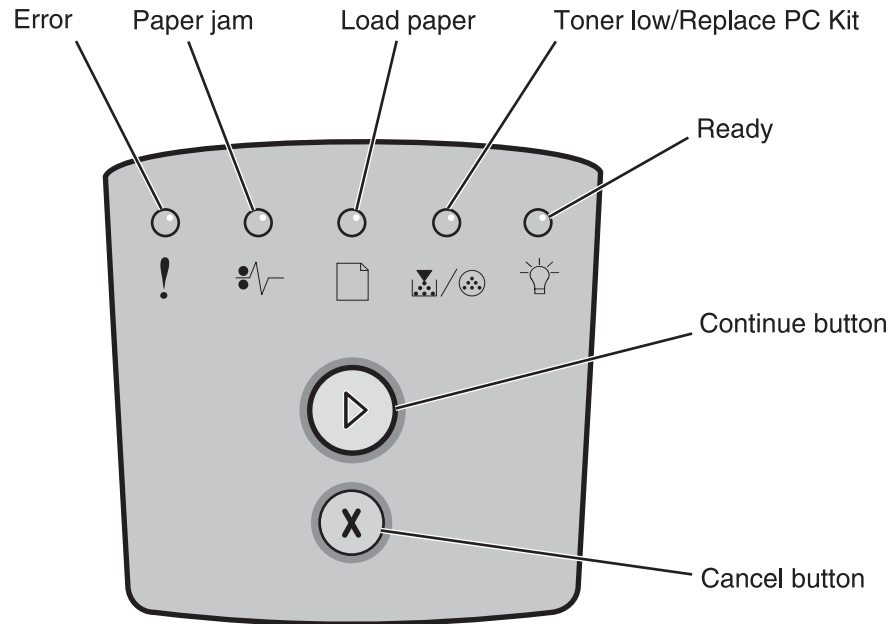

Following a common error light sequence:

- Press and release **Continue** (▶) to resume printing after correcting error, such as a paper jam.
- Press and release **Continue** (▶) twice quickly to display a secondary error code following an error.
- Press and release **Cancel** (X) to cancel the job currently printing.
- Press and hold **Cancel** (X) until all of the lights come on to reset the printer.



## Specifications

### Memory

Item	4512-220 Lexmark E250d	4512-230 Lexmark E250dn
Standard DRAM	32MB	32MB
Optional SDRAM 32MB	✓	✓
Optional SDRAM 64MB	✓	✓
Optional SDRAM 128MB	n/a	n/a
Optional SDRAM 256MB	n/a	n/a
Maximum DRAM	96MB	96MB
Optional flash memory 32MB	1	1
Optional font cards (DBCS)	1	1

### Print speed

Media Size	4512-220 Lexmark E250d	4512-230 Lexmark E250dn
Letter—8.5 x 11 in.	30 ppm	30 ppm
A4—210 x 297 mm	29 ppm	29 ppm
Legal—8.5 x 14 in.	25 ppm	25 ppm
Speed measured on media from tray 1, simplex, and at 600 x 600 dpi.		

### Print quality

Resolution	4512-220 Lexmark E250d	4512-230 Lexmark E250dn
1200 Image quality <sup>1</sup>	✓	✓
2400 Image quality <sup>2</sup>	✓	✓
1200 x 1200 dpi <sup>3</sup>	n/a	n/a
600 x 600 dpi	✓	✓
<sup>1</sup> 1200 Image quality defined as 600 dpi with 2 bit IET (image enhancement technology) default mode for all models		
<sup>2</sup> 2400 Image quality defined as 600 and 4 bit IET		
<sup>3</sup> True 1200 dpi at ½ rated speed.		

**Media trays and supply capacity**

Item	4512-220 Lexmark E250d	4512-230 Lexmark E250dn
<b>Available input trays</b>		
250-sheet tray	✓	✓
550-sheet option drawer	✓	✓
550-sheet tray	optional	optional
Dust cover	optional	optional
<b>Toner and photoconductor</b>		
Toner cartridge	1,500 standard pages SWE 3,500 standard pages after market <sup>1</sup>	1,500 standard pages SWE 3,500 standard pages after market <sup>1</sup>
High yield toner cartridge	n/a	n/a
Photoconductor kit	Up to 30,000 <sup>2</sup>	Up to 30,000 <sup>2</sup>
<sup>1</sup> Declared value in accordance with ISO/IEC 19752		
<sup>2</sup> Based on approximately 5% coverage, actual yield may vary		

**Connectivity and compatibility**

Item	4512-220 Lexmark E250d	4512-230 Lexmark E250dn
<b>Data stream emulations</b>		
PCL 6	✓	✓
PostScript 3	(Mac only)	✓
HBP	✓	✓
PPDS	n/a	n/a
Compatibility	Windows/Macintosh/Linux <sup>1</sup>	Windows/Macintosh/Linux <sup>1</sup>
<b>Standard local connections</b>		
Parallel (IEEE 1284 Bi-Di)	✓	✓
USB*	✓	✓
<b>Standard network connections</b>		
Ethernet (10/100 Base TX)	n/a	✓
<b>Optional local connections</b>		
External print server support	✓	n/a
<b>Option slots</b>		
Memory slots (100-pin DIMM)	1	1
Flash memory / option card	2 <sup>2</sup>	2 <sup>2</sup>
<p>* The E250d and E250dn products are USB 2.0 certified devices supporting hi-speed (480MB/sec.) data transfer.</p> <p><sup>1</sup> Linux support for E250d and E250dn model is utilizing the PCL data stream.</p> <p><sup>2</sup> Only one slot active for flash memory or font card</p>		

## Types of print media

Ensure trays are properly loaded. Never mix media types within a tray.

Source	Sizes	Types	Weight <sup>6</sup>	Input capacity (sheets) <sup>2</sup>
Input tray 1 (250-sheet tray)	A4, A5, A6 <sup>3</sup> , JIS B5, letter, legal, executive, folio, statement	Paper, labels <sup>1</sup> , transparencies	60–90 g/m <sup>2</sup> (16–24 lb)	250 paper 50 labels <sup>1</sup> 50 transparencies
2nd Drawer option (550-sheet only)	A4, letter, legal, A5, JIS B5, executive, folio, statement	Paper, labels <sup>1</sup> , transparencies	60–90 g/m <sup>2</sup> (16–24 lb)	550 paper (20 lb) 50 labels <sup>1</sup> 50 transparencies
Manual feed input <sup>7</sup>	A4, A5, A6 <sup>3</sup> , JIS B5, letter, legal, executive, folio, statement	Paper, labels <sup>1</sup> , transparencies, card stock, <sup>4</sup> envelopes <sup>5</sup>	60–163 g/m <sup>2</sup> (16–43 lb)	1 sheet (all medias)
	Envelopes <sup>5</sup> : monarch (7 3/4), 9, 10, C5, B5, DL			
	Minimum feed size: 76 X 127mm			
	Universal (max) paper: 216 X 357mm (legal size)			

<sup>1</sup> Single sided paper labels are supported for the occasional use of less than 20 pages per month. They must exit through the rear door. Labels such as vinyl labels, pharmacy labels or dual-sided labels are not supported.

<sup>2</sup> For 20 lb print material, unless otherwise noted.

<sup>3</sup> A6 long grain media supported/short grain A6 not supported

<sup>4</sup> Card stock up to 90# index. Designed to exit rear door. Short grain is recommended.

<sup>5</sup> 20 lb envelopes are recommended


Wrinkling may also occur on the front side, but away from address or return address areas. Slight wrinkling (nit in address areas) is permitted on 24# envelopes. Use envelopes that lay flat when individually placed on a table face-down. The distance of any edge or corner from the table should be less than 3 mm.

<sup>6</sup> This refers to paper only. Treeing may occur on 16# paper.

<sup>7</sup> Input using manual feeder is reduced to 1/2 speed

## Tips on preventing jams

### *Paper path*

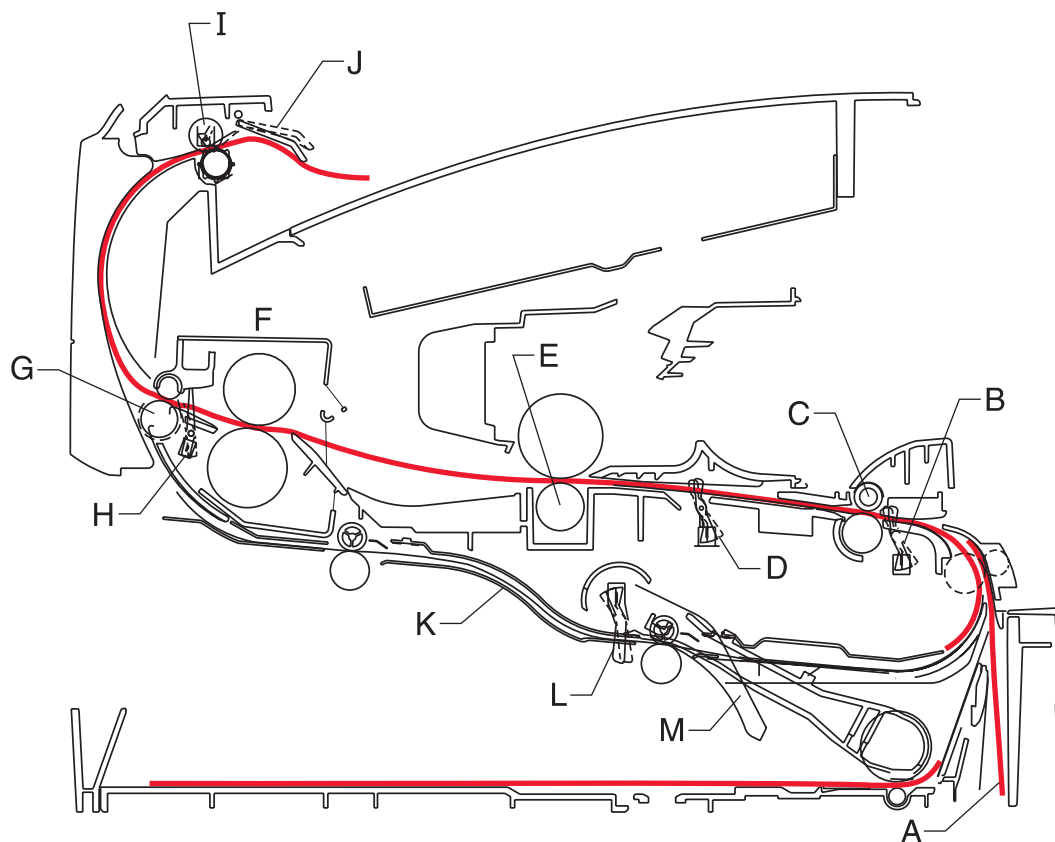

\*Measurements are approximate paper lengths (millimeters)


\*\*Sensors are measured at rotation/position which they are tripped

A	Paper path	A-B	117.8
B	Manual feed sensor	B-C	9.6
C	Upper end feed rolls	C-D	60.5
D	Input sensor	D-E	49.0
E	Transfer roll	E-F	110.7
F	Fuser	F-G	26.9
G	Fuser exit rolls	G-H	6.2
H	Fuser exit sensor	H-I	127.2
I	Exit rolls	I-J	26.4
J	Exit sensor	I-K	217.4
K	Duplex unit	K-L	102.5
L	Duplex sensor	L-M	16.2
M	Auto compensator	M-B	178.9


Most paper jams can be avoided by correctly loading paper and specialty media in the printer.

The following hints can help prevent paper jams:

- Do not load wrinkled, creased, or damp media.
- Never mix media types within a tray.
- Flex, fan, and straighten the media stack before loading it.

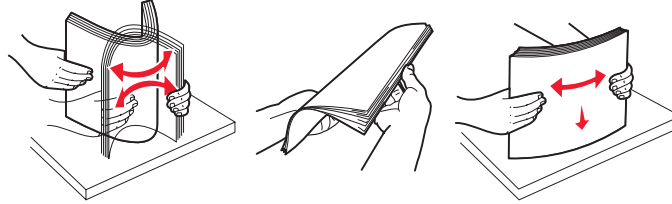

**Note:** Make sure the media stack is below the maximum media fill indicators on the 250-sheet tray before pushing the tray into the printer.

- Push all trays *snugly* into the printer after loading them.
- Make sure paper guides are positioned before loading the paper or specialty media.
- Do not remove trays while a job is printing. Wait for a Load Paper  light sequence.
- Before loading transparencies, fan the stack to prevent sheets from sticking together.
- Do not use envelopes that:
  - Have excessive curl
  - Are stuck together
  - Are damaged in any way
  - Contain windows, holes, perforations, cutouts, or embossments
  - Have metal clasps, string ties, or metal folding bars
  - Have postage stamps attached
  - Have any exposed adhesive when the flap is in the sealed position
- Use only recommended media. Refer to the *Card Stock & Label Guide* available on the Lexmark Web site at [www.lexmark.com](http://www.lexmark.com) for more information about which media provides optimum results for the current printing environment.

---

## Tools

The removal and adjustment procedures require the following tools and equipment:

- Spring hook
- Needle nose pliers
- Volt-ohmmeter
- #1 and #2 Phillips screwdriver
- Slotted screwdriver
- Flashlight

---

## Acronyms

ACM	Autocompensator Mechanism (or paper feed)
ADC	Analog-to-digital Converter
ASIC	Application Specific Integrated Circuit
CBM	Complete Bill Of Material
CRC	Cyclic Redundancy Check
DIMM	Dual In-Line Memory Module
EEPROM	Erasable Electrically Programmable Read-Only Memory
ENA	External Network Adapter
FRU	Field Replaceable Unit
HBP	Host Based Printing
HVPS	High Voltage Power Supply
LCD	Liquid Crystal Diode
LED	Light Emitting Diode
LSU	Laser Scanning Unit
LVPS	Low Voltage Power Supply
NVRAM	Nonvolatile Random Access Memory
PC	Photoconductor
PCL	Printer Control Language
POR	Power-On Reset
POST	Power-On Self Test
PPDS	Personal Printer Data Stream
PRC	People's Republic of China
PSO	Participating Standards Organization
RIP	Raster Image Processor
TAR	Toner Add Roll
SDR	Synchronous Dynamic RAM
SWE	Shipped With Equipment
USB	Universal Serial Bus
V ac	Volts alternating current
V dc	Volts direct current





## 2. Diagnostic information


### Start



**CAUTION:** Unplug power from the printer before connecting or disconnecting any other cable, assembly, or electronic card. This is a precaution for personal safety and to prevent damage to the printer.

This chapter contains the codes and diagnostic tools to aid in providing corrective action for a malfunctioning printer. To determine the corrective action to repair a printer, look for the following information:

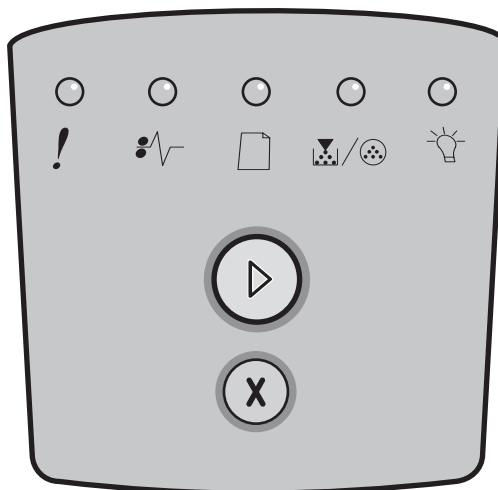

- A description of a problem, see **“Symptom tables” on page 2-37**.
- Information from the operator panel of the printer.
  - **Models E250d and E250dn** have an operator panel containing lights and buttons.





**Warning:** Paper clips are commonly used near printers and can become lodged in the paper path. Always check for debris in the paper path.


## Power-On Self Test (POST) sequence

When the printer is turned on, it performs a POST. Check for correct POST functioning of the base printer by observing the following process:

1. All operator panel lights on momentarily
2. Lights then flash on and off sequentially.
3. After the lights quit flashing, the  light flashes until the fuser comes up to temperature (5–20 additional seconds, depending on the initial temperature of the fuser) and then stays on.
4. If there is a problem in the printer such as a paper jam, the panel lights indicate the problem. See **“Common primary light patterns” on page 2-3** for more information.
5. The printer cycles down into standby mode, and  lights solid.

## Light patterns and error messages

User attendance messages, paper jam errors, and service errors display a light pattern. This may be all the information that is needed. However, if  is double-clicked on the panel, a second pattern may appear with more detailed information. If  is double-clicked again, the first pattern usually returns. Not all initial level light patterns have secondary patterns; when double-clicking, the pattern does not change.

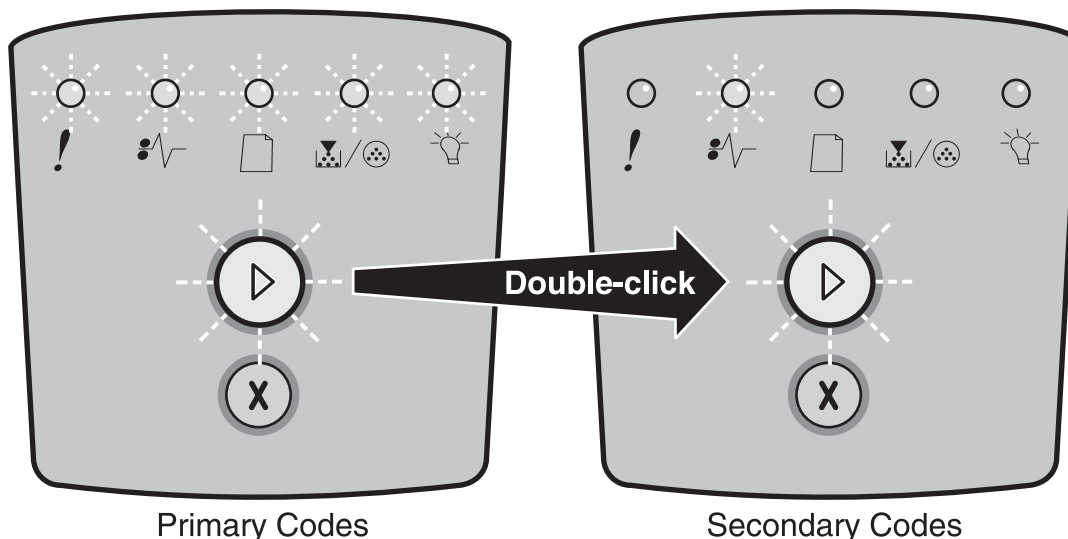

All service errors are indicated by all lights flashing as the primary notification or code. The secondary code indicates an area or function which has the error. Additional tertiary codes used for service (see **“Service tertiary error codes” on page 2-25**) indicate specific errors. See **“Service codes” on page 2-23**.

**Note:** If data is sent to the printer and all lights flash immediately, and double-clicking does not change the display, there may be a code problem. Contact the next level of support.

## Common primary light patterns

See **“Overview of the operator panel” on page 1-2** for icon information.









●	Light on
	Light off
*	Light blinking
x	Light blinking slowly

## Common light sequences











Printer Condition	Page	!	⚡	📄	🖨️/🖨️	💡	▶
Ready / Power Saver	4					●	
Busy	4					*	
Hex Trace Ready	4					x	
Waiting	5					●	●
Flushing / Resolution reduced	5	*				*	
Not ready (printer is offline)	5						●
Close door	6	●					
Insufficient collation area/ Insufficient memory	6						
Cancel job/ Reset printer	6	●	●	●	●	●	●
Load print media Tray 1	7			●			●
Load manual feeder	7			●			
Toner low <sup>1</sup>	7				●		●
Toner cartridge region mismatch	8	●			●		
Photoconductor kit life warning <sup>2</sup>	8				*		●
Replace photoconductor (printer hard stop)	8	*			*		●
Programming engine code/ Programming system code	9			●	●	●	
Invalid engine code / Invalid network code	9	●				●	
Service error	9	*	*	*	*	*	*
Printer error <sup>3</sup>	10	●					●
Paper jam printer error	10		●				●
Short media	10	●					●
Output bin full	11			*			
Load Tray 1 for side 2 of manual duplex printing				●			*
<sup>1</sup> Toner low light will remain on with other primary light sequences.							
<sup>2</sup> Toner low light will remain flashing with other primary light sequences.							
<sup>3</sup> Secondary codes will follow this code.							

## Primary codes








### Ready/Power Saver

					
				●	
<b>Meaning</b> <ul style="list-style-type: none"> <li>The printer is ready to receive and process data.</li> <li>The printer is in Power Saver mode.</li> </ul>					
<b>Action</b> <ul style="list-style-type: none"> <li>Send a print job.</li> <li>Press <b>Continue</b>  to print the menu settings pages for a list of current printer settings.</li> <li>Press and hold <b>Cancel</b>  to reset the printer.</li> </ul>					







### Busy

					
				*	
<b>Meaning</b> <ul style="list-style-type: none"> <li>The printer is busy receiving and processing data or printing.</li> <li>The printer is printing a directory, font list, menu settings pages, or Print Quality Test Pages.</li> </ul>					
<b>Action</b> <p>Busy:</p> <ul style="list-style-type: none"> <li>Wait for the message to clear.</li> <li>Press and release <b>Cancel</b>  to cancel the print job.</li> <li>Press and hold <b>Cancel</b>  to reset the printer.</li> </ul> <p>Printing a directory, a font list, menu settings pages, or Print Quality Test Pages:</p> <ul style="list-style-type: none"> <li>Wait for the pages to print. The Busy message is displayed as the pages print. The Ready light is on when the printing stops.</li> <li>Press and release <b>Cancel</b>  to cancel printing.</li> <li>Press and hold <b>Cancel</b>  to reset the printer.</li> </ul>					







### Hex Trace Ready

					
				x	
<b>Meaning</b> <p>The printer is in the Ready mode, and Hex Trace is active.</p>					
<b>Action</b> <ul style="list-style-type: none"> <li>Advance users can use Hex Trace to help troubleshoot printing problems. After resolving the problem, turn off the printer to exit Hex Trace. Wait for the message to clear.</li> <li>Press and hold <b>Cancel</b>  to reset the printer.</li> </ul>					







## Waiting

					
				●	●
<b>Meaning</b>					
The printer is waiting until a print timeout occurs, or until it receives additional data.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press <b>Continue</b> (▶) to print the contents of the print buffer.</li> <li>Press and release <b>Cancel</b> (X) to cancel the print job.</li> <li>Press and hold <b>Cancel</b> (X) to reset the printer.</li> </ul>					







## Flushing/Resolution reduced

					
*				*	
<b>Meaning</b>					
<ul style="list-style-type: none"> <li>The printer is flushing corrupted print data.</li> <li>The printer is processing data or printing pages, but the resolution of a page in the current print job is reduced from 600 dots per inch (dpi) to 300 dpi to prevent a memory full error.</li> </ul>					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Wait until the control panel returns to Ready to print other jobs.</li> <li>Press and release <b>Cancel</b> (X) to cancel the print job.</li> <li>Press and hold <b>Cancel</b> (X) to reset the printer.</li> </ul>					










## Not ready

					
					●
<b>Meaning</b>					
The printer is not ready to receive or process data, or the printer ports are offline.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press and release <b>Continue</b> (▶) to return to the Ready state.</li> <li>Press and release <b>Cancel</b> (X) to return to the Ready state.</li> </ul>					







**Close door**

					
●					
<b>Meaning</b>					
The printer front door is open.					
<b>Action</b>					
Close the door. The printer will automatically reset.					









**Insufficient collation area/Insufficient memory**

					
●					●
<b>Meaning</b>					
The printer memory is too full to collate the print job.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press and release <b>Continue</b>  to clear the message and continue printing the job. (The job may not print correctly.)</li> <li>Press and release <b>Cancel</b>  to cancel the print job.</li> <li>Press <b>Cancel</b>  to reset the printer.</li> </ul>					









**Cancel job/Reset printer**

					
●	●	●	●	●	●
<b>Meaning</b>					
<ul style="list-style-type: none"> <li>The current print job is canceled.</li> <li>The printer is resetting to the user default settings. Any active print jobs are canceled. A user default setting remains in effect until it is changed or has restored the factory default settings.</li> </ul>					
<b>Action</b>					
Wait for the message to clear.					








## Load print media

					
		●			●
<b>Meaning</b>					
The printer is out of print media at the indicated source.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Load print media into the indicated tray, and press <b>Continue</b>  to resume printing.</li> <li>Press <b>Cancel</b>  to reset the printer.</li> </ul>					

## Load manual feeder

					
		●			
<b>Meaning</b>					
The printer prompts to load a single sheet of print media in the manual feeder.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Load print media into the manual feeder.</li> <li>Press <b>Continue</b>  to resume printing.</li> <li>Press <b>Cancel</b>  to reset the printer.</li> </ul>					

## Toner low

					
			●		●
<b>Meaning</b>					
The printer is ready to receive and process data. In addition, the toner in the toner cartridge is getting low.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press and release <b>Continue</b>  to clean the light sequence and continue processing the print job.</li> <li>Turn the printer off.</li> <li>Remove the toner cartridge, and shake it to extend the life.</li> <li>Replace the toner cartridge.</li> </ul>					

### Toner cartridge region mismatch

●			●		
<b>Meaning</b>					
The geographic region of the printer does not match the geographic region of the installed toner cartridge.					
<b>Action</b>					
Remove the toner cartridge, and install a new toner cartridge that matches the region of the printer.					

### Photoconductor kit life warning







			*		●
<b>Meaning</b>					
The photoconductor is almost full and should be replaced soon.					
<b>Note:</b> The Toner Alarm must be turned on in the driver for this message to appear. The factory default is <b>Off</b> .					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press and release <b>Continue</b>  to clear the light sequence and continue printing.</li> <li>Replace the photoconductor kit.</li> </ul>					

### Replace photoconductor (printer hard stop)







*			*		●
<b>Meaning</b>					
The photoconductor kit is full and must be replaced. The printer will not print any more pages until the photoconductor kit is replaced.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press and release <b>Continue</b>  to print a photoconductor kit instruction page.</li> <li>Replace the photoconductor kit.</li> </ul>					










### Programming engine code/Programming system code

					
		●	●	●	
<b>Meaning</b>					
New code is being programmed into the engine or firmware code flash.					
<b>Action</b>					
Wait for the message to clear. When the printer has finished programming the code, it performs a soft reset.					









### Invalid engine code/Invalid network code

					
●				●	
<b>Meaning</b>					
The engine code and/or the network code has not been programmed or has been programmed but is invalid.					
<b>Action</b>					
Download valid engine code to the internal print server.					









### Service error

					
*	*	*	*	*	*
<b>Meaning</b>					
The printer has a service error, and printing has stopped.					
<b>Action</b>					
Press <b>Continue</b>  twice to see the secondary code. See <b>“Service codes” on page 2-23</b> to locate the problem.					









### Printer error

					
●					●
<b>Meaning</b> The printer has one of the following errors: <ul style="list-style-type: none"> <li>• Memory is full, insufficient to save what is in the buffer.</li> <li>• A page is too complex too complex to print or is shorter than the set page margins.</li> <li>• Resolution of a formatted page is reduced to 300 dpi.</li> <li>• A font error occurred.</li> <li>• Communication with the host computer is lost.</li> <li>• Short media.</li> </ul>					
<b>Action</b> <ul style="list-style-type: none"> <li>• Press <b>Continue</b>  twice quickly to see the secondary error code.</li> <li>• Press <b>Continue</b>  to clear the secondary message.</li> </ul>					








### Paper jam printer error

					
	●				●
<b>Meaning</b> The printer has a paper jam.					
<b>Action</b> <ul style="list-style-type: none"> <li>• Press <b>Continue</b>  twice quickly to see the secondary error code.</li> <li>• Press <b>Continue</b>  to resume printing once all the jammed pages are cleared from the paper path.</li> </ul>					



### Short media


					
●					●
<b>Meaning</b> The media length is too short to print the formatted data. This occurs when the printer does not know the print media size loaded in the way, or when there is a problem feeding the print media.					
<b>Action</b> <ul style="list-style-type: none"> <li>• Make sure the print media that is loaded is large enough.</li> <li>• Open the front door, clear the paper path, and close the door to resume printing.</li> <li>• Press <b>Continue</b>  to clear the light sequence and continue printing.</li> <li>• Press <b>Cancel</b>  to cancel the print job.</li> </ul>					

## Output bin full







					
		*			
<b>Meaning</b>					
The output bin is full.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Remove printed pages from the output bin.</li> <li>Press <b>Continue</b>  to clear the error code.</li> </ul>					



## Common secondary light patterns


When the Paper jam  and Continue  lights are both on, a paper jam has occurred with a secondary error code.

Press and release **Continue**  twice quickly to display the secondary error code light sequence. The following table shows what these light sequences mean and where to go for help.







### Secondary light sequences (paper jams)

Printer Condition	Page	!			 / 		
Paper jam at the input sensor	14		●			●	●
Paper jam in the manual feeder	14		●		●	●	●
Paper jam between the input and exit sensor	14		●		●		●
Paper jams at the exit sensor	14		●	●			●
Paper jam in the 250-sheet tray	15		●	●	●		●
Paper jam in the 550-sheet drawer	15		●	●		●	●
Paper jam (duplex)	15		●	*	*		●
Paper jam (duplex front)	15		●		*		●
Paper jam (duplex rear)	15		●	*			●
Paper jam (duplex - location unknown)	16		●			*	●
Paper jam (duplex - unsupported size)	16		●	*		*	●

When the **Error**  and **Continue**  lights are both on, a printer error has occurred with a secondary code.







Press and release **Continue**  twice quickly to display the secondary error code light sequence. The following table shows what these light sequences mean and where to go for help.

### Secondary light sequences (printer errors)







Printer Condition	Page						
Complex page	17	●				●	●
Insufficient collation area	17	●			●		●
Network interface errors	18	●	●				●
Resource save off - deficient memory	18	●				*	●
Font error	18	●			*		●
Insufficient defrag memory	19	●		*			●
ENA connection lost	19	●	*				●
Host interface disabled	19	●	*	*			●
Memory full	20	●			●	●	●
Short media	20	●		●		●	●
Invalid engine code	20	●		●		●	
Invalid network code	21	●		*		●	
Toner cartridge region mismatch	21	●		*	●		
Change toner cartridge / invalid refill	21	●	*		●		
Missing / Defective toner cartridge	22	●	●		●		
Unsupported toner cartridge	22	●		●	●		
Too many options attached	22	●		●	●		●
Unsupported flash option	23	●	●	●			●

## Secondary error codes







### Paper jam at the input sensor

					
	●			●	●
<b>Meaning</b>					
A paper jam has occurred at the input sensor, which can be either after the print media leaves the tray and enters the printer or in the manual feeder.					
<b>Action</b>					
Clear the paper jam.					







### Paper jam in the manual feeder

					
		●	●	●	●
<b>Meaning</b>					
A paper jam has occurred at the manual feeder.					
<b>Action</b>					
Clear the paper jam.					







### Paper jams between the input and exit sensors

					
	●		●		●
<b>Meaning</b>					
A paper jam has occurred. The jammed media is most likely in the fuser area under the toner cartridge assembly.					
<b>Action</b>					
Clear the paper jam.					







### Paper jams as a printed job exits the printer

					
	●	●			●
<b>Meaning</b>					
A paper jam has occurred as the print media is exiting the printer.					
<b>Action</b>					
Clear the paper jam.					







**Paper jam in the 250-sheet tray**

					
	●	●	●		●
<b>Meaning</b>					
A paper jam has occurred in the 250-sheet tray.					
<b>Action</b>					
Clear the paper jam.					







**Paper jam in the 550-sheet drawer**

					
	●	●		●	●
<b>Meaning</b>					
A paper jam has occurred in the 550-sheet drawer.					
<b>Action</b>					
Clear the paper jam.					







**Paper jam (duplex)**

					
	●	*	*		●
<b>Meaning</b>					
A paper jam has occurred in the duplex unit.					
<b>Action</b>					
Remove the tray, open the duplex door and clear the paper jam.					







**Paper jam (duplex front)**

					
	●		*		●
<b>Meaning</b>					
A paper jam has occurred in the front of the duplex unit.					
<b>Action</b>					
Remove the tray, open the duplex door and clear the paper jam.					







**Paper jam (duplex rear)**

					
	●	*			●
<b>Meaning</b>					
A paper jam has occurred in the rear area of the duplex unit.					
<b>Action</b>					
Remove the tray, open the duplex door and clear the paper jam.					

**Paper jam (duplex - unknown location)**








					
	●			*	●
<b>Meaning</b>					
A paper jam has occurred somewhere in the duplex unit.					
<b>Action</b>					
Remove the tray, open the duplex door and clear the paper jam. Paper may also be inside the rear door.					

**Paper jam (duplex - unsupported size)**










					
	●	*		*	●
<b>Meaning</b>					
A paper jam has occurred in the duplex unit due to an unsupported print media size.					
<b>Action</b>					
Clear the paper jam.					










## Complex page

					
		●		●	●
<b>Meaning</b>					
The page may not print correctly because the print information on the page is too complex (that is, too large for the printer memory).					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press <b>Continue</b>  to clear the error code and continue processing the print job (some of the print data may be lost).</li> </ul> <p>To avoid this error in the future:</p> <ul style="list-style-type: none"> <li>Reduce the complexity of the page by reducing the amount of text or graphics on the page and deleting unnecessary download fonts or macros.</li> <li>Set <b>Page Protect</b> to On in the Local Printer Setup Utility.</li> <li>Install additional printer memory.</li> </ul>					







## Insufficient collation area

					
●			●		●
<b>Meaning</b>					
<p>The printer memory does not have the free space necessary to collate the print job. This may happen due to one of these errors:</p> <ul style="list-style-type: none"> <li>Memory is full.</li> <li>A page is too complex to print.</li> <li>A page is shorter than the set page margins.</li> <li>Memory is insufficient to save what is in the buffer.</li> </ul>					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press <b>Continue</b>  to clear the message and continue printing the job. (The job may not print correctly.)</li> <li>Press and release <b>Cancel</b>  to cancel the print job.</li> <li>Press and hold <b>Cancel</b>  to reset the printer.</li> </ul> <p>To avoid this error in the future:</p> <ul style="list-style-type: none"> <li>Simplify the print job. Reduce the complexity of the page by reducing the amount of text or graphics on the page and deleting unnecessary downloaded fonts or macros.</li> <li>Install additional printer memory.</li> </ul>					









### Network interface errors

					
●	●				●
<b>Meaning</b>					
The printer cannot establish communication with the network.					
<b>Action</b>					
Press <b>Continue</b>  to clear the message and continue printing. (The previous print job may not print correctly.)					










### Resource save off - deficient memory

					
●	●				●
<b>Meaning</b>					
This error message indicates that too much memory has been allocated to link buffers or that some printer settings are using more memory than the default setting.					
<b>Action</b>					
Add more memory, change link buffers or reset the printer settings that have been changed.					








### Font error

					
●		*			●
<b>Meaning</b>					
The printer does not have enough memory to save the data in the buffer.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>• Install additional memory.</li> <li>• Press <b>Continue</b>  to continue printing the job.</li> <li>• Press <b>Cancel</b>  to cancel the print job.</li> </ul>					








### Insufficient defrag memory

					
●		*			●
<b>Meaning</b>					
<p>The printer memory does not have the free space necessary to collate the print job. This may happen due to one of these errors:</p> <ul style="list-style-type: none"> <li>• Memory is full.</li> <li>• A page is too complex to print.</li> <li>• A page is shorter than the set page margins.</li> <li>• Memory is insufficient to save what is in the buffer.</li> </ul>					
<b>Action</b>					
<ul style="list-style-type: none"> <li>• Press <b>Continue</b>  to clear the message and continue printing the job. (The job may not print correctly.)</li> <li>• Press and release <b>Cancel</b>  to cancel the print job.</li> <li>• Press and hold <b>Cancel</b>  to reset the printer.</li> </ul> <p>To avoid this error in the future:</p> <ul style="list-style-type: none"> <li>• Simplify the print job. Reduce the complexity of the page by reducing the amount of text or graphics on the page and deleting unnecessary downloaded fonts or macros.</li> <li>• Install additional printer memory.</li> </ul>					







### ENA connection lost

					
●	*				●
<b>Meaning</b>					
The printer cannot establish communication with the network.					
<b>Action</b>					
Press <b>Continue</b>  to clear the code and continue printing. (The previous print job may not print correctly.)					







### Host interface disabled

					
●	*	*			●
<b>Meaning</b>					
The printer USB or parallel port has been disabled.					
<b>Action</b>					
Press <b>Continue</b>  to clear the code. The printer discards any print jobs previously sent. Enable the USB or parallel port by selecting a value other than Disabled for the USB Buffer or Parallel Buffer item in the Local Printer Settings Utility.					







## Memory full

					
●			●	●	●
<b>Meaning</b>					
The printer is processing data, but the memory used to store pages is full.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press <b>Continue</b> (▶) to clear the message and continue printing the job (the job may not print correctly).</li> <li>Press and release <b>Cancel</b> (X) to cancel the print job.</li> <li>Press and hold <b>Cancel</b> (X) to reset the printer.</li> </ul> <p>To avoid this error in the future:</p> <ul style="list-style-type: none"> <li>Simplify the print job. Reduce the complexity of the page by reducing the amount of text or graphics on the page and deleting unnecessary downloaded fonts or macros.</li> <li>Install additional printer memory.</li> </ul>					







## Short media

					
●		●		●	●
<b>Meaning</b>					
The media length is too short to print the formulated data. This occurs when the printer does not know the print media size loaded in the tray, or there is a problem feeding the print media.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Make sure the print media that is loaded is large enough.</li> <li>Open the front door, clear the paper path and close the door to resume printing.</li> <li>Press <b>Continue</b> (▶) to clear the code and continue printing the job.</li> <li>Press <b>Cancel</b> (X) to cancel the print job.</li> </ul>					







## Invalid engine code

					
●		●		●	
<b>Meaning</b>					
The engine code has not been programmed, or the programmed code is not valid.					
<b>Action</b>					
Download the valid engine code to the internal print server.					








**Invalid network code**

					
●		*		●	
<b>Meaning</b>					
The code in an internal print server had not been programmed, or the programmed code is not valid.					
<b>Action</b>					
Download the valid engine code to the internal print server.					








**Toner cartridge region mismatch**

					
●		*	●		
<b>Meaning</b>					
The geographic region of the printer does not match the geographic region of the installed toner cartridge.					
<b>Action</b>					
Remove the toner cartridge, and install a new toner cartridge that matches the region of the printer.					








**Change toner cartridge/invalid refill**

					
●	*		●		
<b>Meaning</b>					
The toner in the toner cartridge is getting low, or an invalid refill toner has been installed.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press and release <b>Continue</b>  to clear the light sequence and continue processing the print job.</li> <li>Turn the printer off.</li> <li>Remove the toner cartridge, and shake it to extend the life, or replace the toner cartridge with a valid toner cartridge.</li> <li>Replace the toner cartridge.</li> <li>Turn the printer back on.</li> </ul>					








### Missing/Defective toner cartridge

					
●	●		●		
<b>Meaning</b>					
The toner in the toner cartridge is getting low, or a defective toner cartridge has been detected.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press and release <b>Continue</b>  to clear the light sequence and continue processing the print job.</li> <li>Turn the printer off.</li> <li>Remove the toner cartridge, and shake it to extend the life, or replace the toner cartridge if it is defective.</li> <li>Replace the toner cartridge.</li> <li>Turn the printer back on.</li> </ul>					

### Unsupported toner cartridge

					
●		●	●		
<b>Meaning</b>					
The toner cartridge is not supported by the printer.					
<b>Action</b>					
<ul style="list-style-type: none"> <li>Press and release <b>Continue</b>  to clear the light sequence and continue processing the print job.</li> <li>Turn the printer off.</li> <li>Remove the toner cartridge, and replace it with a supported toner cartridge.</li> <li>Turn the printer back on.</li> </ul>					

### Too many options attached

					
●		●	●		●
<b>Meaning</b>					
This message refers to too many flash options.					
<b>Action</b>					
Press <b>Continue</b>  briefly to clear the message.					

Unsupported flash option

!	⚡	📄	🖨️/⚙️	💡	▶
●	●	●			●
<b>Meaning</b>					
An error occurs at power-on.					
<b>Action</b>					
Power off the printer and remove the unsupported option					

Service codes


All service errors are indicated by all lights flashing as the primary notification or code. The secondary light pattern indicates an area or function which has the error. Tertiary codes (shown on the following pages) indicate specific device errors. When all lights flash, double-click ▶ to see the secondary code. Double-click ▶ again to see the tertiary code. Double-click ▶ a third time to return to the primary light pattern.

In the following example:

- The primary light pattern indicates a service error (all flashing). Double-click ▶ for more information.
- The secondary light pattern indicates a fuser, toner sensor, or fan error. Double-click ▶ for more information.
- The tertiary light pattern indicates the fan has stalled. Double-click ▶ again and the original primary light pattern will appear.

Note:

- The printer cannot directly determine that a fan has failed, but can sense the higher temperature at the fuser or printhead.
- If data is sent to the printer and all lights flash simultaneously, and double-clicking ▶ does not produce a secondary code, there may be a code problem. Contact the next level of support.

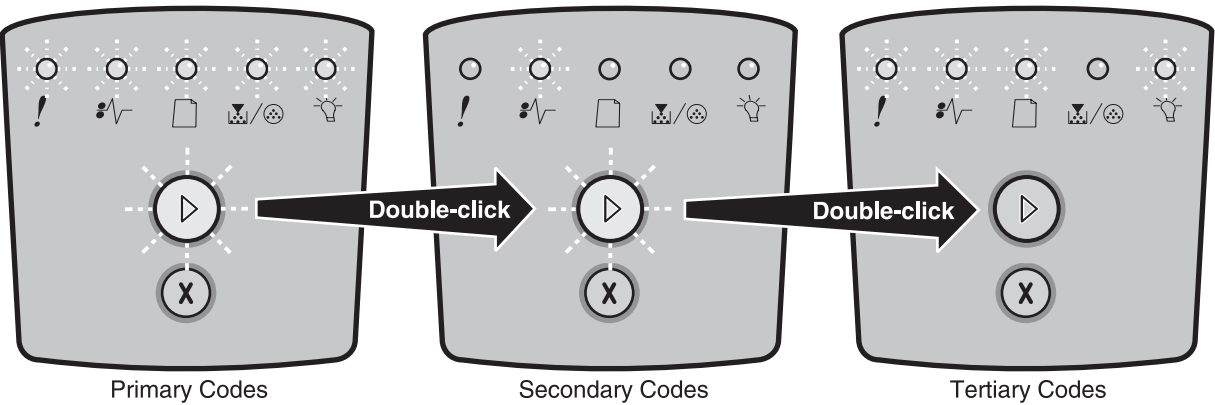







## Service primary code

*	Light blinking
---	----------------







When this code appears, double-click  to reveal the secondary codes.

## Service primary code

						
<b>Lights</b>						
Primary code for service errors See service secondary error codes	*	*	*	*	*	*

## Service secondary error codes

### Service secondary codes

						
<b>Lights</b>						
900—Software						*
900—Software	*		*		*	
91x—DC motor or transfer roll						*
92x—Fuser or toner sensor		*				*
93x—Printhead, drive motor	*	*				*
94x—LVPS service error			*			*
95x—Controller card (NCRAM, ROM, or NAND)	*		*			*
96—RAM memory		*	*			*
97x—Network	*	*	*			*



## Service tertiary error codes

### Service tertiary error codes

Service error codes are generally non-recoverable except in an intermittent condition when POR (power-on reset) is performed which allows the printer to temporarily recover from the error.

**Note:** All service errors are initially communicated by all lights flashing which is the primary indication or code. For brevity, this indication is not repeated in the following codes.



**CAUTION:** When this symbol appears, there is a danger from hazardous voltage in the area of the product that is being worked on. Unplug the product before beginning, or use caution if the product must receive power in order to perform the task.

### Controller software

Codes 90x indicate a controller software error/illegal trap. For the other errors, which indicate a faulty programming process or faulty component on the controller card, replace the controller card. See **“Controller card removal” on page 4-13.**

#### Service tertiary error codes—controller software

Lights	!	⚡	📄	⚠️/⚙️	💡	▶️
<b>Service secondary codes—90x</b>						*
<b>Service tertiary codes</b>						
902—General engine software error		*			*	
905—Interface violation by paperport device		*	*		*	
<b>Service watchdog—90x</b>	*		*		*	
Timer service slow		*		*		*

### Transfer roll or tray 2

Code 914 indicates an error in tray 2 motor. Replace the drawer.

Code 917 indicates a problem in the transfer roll circuitry. Check the continuity from the cable connection on the HVPS (high voltage power supply) to the right side of the transfer roll.







#### Service tertiary error codes—transfer roll

Lights	!	⚡	📄	⚠️/⚙️	💡	▶️
<b>Service secondary codes—91x</b>	*					*
<b>Service tertiary codes</b>						
914—Tray 2 motor failure			*		*	
917—Transfer roll circuitry	*	*	*		*	

## Fuser, fan, or toner sensor error

Codes 920 through 929 indicate a problem in the fuser (see fuser service check...), a stalled fan motor, or a faulty toner sensor or toner cartridge. Multiple errors indicate replacing the corresponding part.

### Service tertiary error codes—fuser, fan, or toner sensor

						
<b>Lights</b>						
<b>Service secondary codes—92x</b>		*				*
<b>Service tertiary codes—fuser, fan, or toner sensor</b>						
920—Fuser below temperature when printing					*	
921—Fuser below standby temperature at idle	*				*	
922—Fuser failed to reach standby temperature		*			*	
923—Fuser too hot during printing or idle	*	*			*	
924—Open circuit in thermistor path			*		*	
925—Incorrect fuser	*		*		*	
927—Fan stalled	*	*	*		*	
929—Toner sensor or toner cartridge are bad	*			*	*	






## Printhead, transport motor, or RIP/engine communication error

Codes 930 through 935 indicate a problem with the printhead. Check cables to the printhead. Replace the printhead as necessary.

Codes 936 and 937 indicate a problem in the drive system motor.

Code 939 indicates a communication failure between the RIP and engine processors.







### Service tertiary error codes—printhead, transport motor, or RIP engine communicator

	!					
<b>Lights</b>						
<b>Service secondary codes—93x</b>	*	*				*
<b>Service tertiary codes—printhead, transport motor, or RIP engine communicator</b>						
930—Printhead error					*	
931—Printhead error	*				*	
932—Printhead error		*			*	
933—Printhead error	*	*			*	
934—Printhead error			*		*	
935—Printhead error	*		*		*	
936—Transport motor error		*	*		*	
937—Transport motor error	*	*	*		*	

## NVRAM failure

Error codes 950-954 indicate a problem in the NVRAM (nonvolatile random access memory). Replace the operator panel assembly. Codes 955-959 indicate a failed controller card assembly. Replace the controller card.







### Service tertiary error codes—NVRAM failure

						
<b>Lights</b>						
<b>Service secondary codes—95x</b>	*		*			*
<b>Service tertiary codes—NVRAM failure</b>						
950—Secure EEPROM data does not match NVRAM					*	
951—Secure EEPROM failure	*				*	
952—NVRAM CRC failure		*			*	
954—NVRAM chip failure			*		*	
955—Code ROM or NAND failed CRC	*		*		*	
956—Processor failure		*	*		*	
957—ASIC failure	*	*	*		*	
958—NAND failure				*	*	
959—SRAM failure	*			*	*	

## Network error

Indicates an error in the network circuitry. Replace the controller card assembly.

### Service tertiary error codes—network error

						
<b>Lights</b>						
<b>Service secondary codes—97x</b>	*	*	*			*
<b>Service tertiary codes—network error</b>						
975—Unrecognizable network port	*		*		*	
976—Unrecoverable software error in network port		*	*		*	
978—Bad checksum while programming port				*	*	
979—Flash parts failed while programming port	*			*	*	

## Messages and error codes

**Note:** The following message and error codes will be visible only in the print history in the diagnostic mode for E250d and E250dn. See **“Diagnostics mode selections” on page 3-8**.

The printer operator panel displays light patterns describing the current state of the printer and indicates possible printer problems that must be resolved. This topic provides a list of all printer messages and explains what they mean.

### User attendance messages

#### Cartridge error codes

Error	Description
31	Defective cartridge
32	Unsupported cartridge
33	Invalid refill

### Paper jam error codes

#### Paper jam error codes

Error	Description
200.00	Paper jam around input sensor.
200.01	Classic input jam. The media is too long over the input sensor. Possible causes include multi-sheet feed, tray size sensing problem, and media slippage.
200.02	The main input sensor never became uncovered from the sheet ahead.
200.03	The video never started on the page at the input sensor within two inches after hitting the input sensor
200.04	The media at the input sensor before interrupt occurred - not enough time elapsed since the printhead started to expect the printhead mirror motor lock. Possible causes include bouncy sensor or exceptionally fast pick - perhaps due to media pre-staged in the source tray.
200.06	Imaged page not expected page (bouncy passthru sensor)
200.08	Media reached the input sensor before the EP was ready
200.09	Transfer servo never started
200.12	Media detected at manual feeder sensor when not expected. Possible causes include user insert of media when motor is running or pre-staged media in the tray.
200.13	The input sensor is covered when the media is not expected (media in machine during warm-up)
200.14	Trailing edge cleared manual feed, but did not successfully debounce the sensor. Potential causes are a small gap or a bouncy manual feed sensor.
200.15	UNRECOVERABLE NO GAP JAM. Engine detected no gap at the manual feeder sensor, attempted to open the gap by stopping the feed rolls, but no trailing edge was ever seen at the input sensor.
200.16	Transport motor error detected

**Paper jam error codes (Continued)**

<b>Error</b>	<b>Description</b>
200.17	Took too long to ramp up transport motor
200.18	Manual feeder sensor never became uncovered from the sheet ahead.
200.19	The media never reached the input sensor, but was detected at manual feeder sensor.
200.20	The media is too long over the manual feeder sensor. Possible causes include multi-sheet feed, media size (length) problem, pre-staged media in the tray.
200.22	FAILED SMALL GAP OR NO GAP JAM RECOVERY. Engine detected small gap or no gap at the manual feeder sensor, opened the gap by stopping the feed rolls, but never saw the leading edge of the second page at the input sensor.
200.23	Laser Servo never started due to potential conflict with the transfer servo. Possible causes: slow or missing transport motor positional feedback, or the media is transferred too quickly to the input sensor.
200.24	The measured gap at the input sensor is too small to meet the video delivery requirements. (There is not enough time since prior image finished to start new image)
200.26	The trailing edge never cleared the input sensor when feeding out the media that was detected during warm-up.
200.27	Printhead Driver: Mirror motor fell out of lock condition after the media at the input sensor - more time elapsed since the printhead than the expected stable lock time, but less than the printhead jitter-stable specification.
	Mirror motor fell out of lock condition after media at the input sensor - more time elapsed since the printhead than expected stable lock time, but less than the printhead jitter-stable specification.
200.28	First writing line of a page at the developer nip, but laser servo cleanup is not complete. Likely pre staged media or a fast paper feed.
200.29	Printhead drive control out of range due to an external event beyond what the control is designed to handle. Probable causes: ESD or noise on hsync signal.
200.30	Narrow media sensor covered during warm-up.
200.32	Media more than 14 inches too long over the manual feeder sensor. Possible causes include multi-sheet feed or pre-staged media in the tray.
200.33	Page from tray 1 did not reach the input sensor after multiple attempts. Page did make it out of the tray at least as far as the manual feeder sensor. Possible cause is that the page stalled at the alignment gate.
200.34	Timed out waiting for page from tray 1 to reach the input sensor after multiple pick attempts, but the page was later detected at the input sensor while waiting for any page(s) ahead to clear the paper path. Possible cause is that the page is delayed at the alignment gate.
200.35	Failed to create hsync during auto alignment
200.36	Lost hsyncs during auto alignment
200.37	Timeout on data collection during auto alignment
200.38	Interpage servo gap is smaller than expected for printhead offset target evaluation
201.00	Paper jam between input and exit sensor
201.01	Transport motor identification failed to identify either motor after two tries.

**Paper jam error codes (Continued)**

Error	Description
201.02	Exit sensor never made by leading edge of page. Also known as internal jam.
201.03	Video never started on the page at the input sensor within two inches after hitting the input sensor
201.05	Restart attempted after an internal jam without the cover open/close event. It is likely that the jam was never cleared.
201.25	Exit sensor never made by leading edge of media when feeding out the media that was detected during warm-up.
201.26	Page at fuser nip before fuser started ramping toward desired temperature. Indicates code may be receiving more hall interrupts than intended
201.27	Page at fuser nip before fuser reached acceptable operating temperature. Page arrived at fuser earlier than expected, so it was probably staged
202.00	Paper jam around exit sensor.
202.01	Exit sensor never broke on the trailing edge of the sheet at the exit sensor.
202.02	Exit sensor never broke from sheet ahead of page heading toward the exit sensor.
202.06	Exit sensor bounced
202.13	Exit sensor covered, media not expected (media not in machine during warm-up)
202.25	Exit sensor never broke from the sheet ahead of the page heading toward the exit sensor when feeding out the media detected during warm-up.
202.26	Trailing edge never cleared exit sensor when feeding out media that was detected during warm-up.
202.32	Long media or shingled multi feed stopped before sending to duplex.
231.00	Duplex jam while reversing into the device
231.01	Duplex sensor never made by leading edge reversing into the duplex. x1=sensor state
231.02	Bouncy duplex sensor never made. x1+x2=paper path location
232.00	Duplex jam while staging in the device
232.01	Duplex sensor never broke by the sheet ahead after reversing into the duplex. x1=sensor state, x2+x3=paper path location
232.02	Page in duplex ahead of current reversing page never staged. x1=duplex sensor state (1=made), x2+x3=paper path location
233.00	Duplex jam while picking from the device
233.01	Page in duplex never picked. x1+x2=paper path location
233.02	Feed error picking from the duplex. x1=source, x2+x3=time since pick
233.03	Paper never reached the input sensor, but was detected at the manual feed sensor.
234.01	Duplex sensor covered during warm-up.
235.01	Invalid duplex media
241.00	Paper jam near tray 1.

**Paper jam error codes (Continued)**

<b>Error</b>	<b>Description</b>
241.10	Second pick attempt failed from Tray 1
241.12	Second pick from manual feeder, tray 1, or feeder failed when the media was in the source while other sheets were committed to the paper path.
241.16	Failed to feed from tray 1. Pages in the paper path have been flushed to the output bin.
241.17	MISIDENTIFIED SMALL GAP JAM. Engine detected small gap at the manual feeder sensor, attempted to open the gap by stopping the feed rolls, trailing edge was seen at the input sensor, manual feeder sensor is no longer covered.
241.18	MISIDENTIFIED NO GAP JAM. Engine detected no gap at the manual feeder sensor, attempted to open the gap by stopping the feed rolls, trailing edge was seen at the input sensor, manual feeder sensor is no longer covered.
241.19	Second pick attempted failed from Tray 1, no pages printed since calling a 241.10 or a prior 241.19.
242.00	Paper jam near tray 2.
242.01	Took too long to ramp up dc feed motor
242.08	Received lots of dc feed interrupts before losing them
242.10	Second pick attempt failed from Tray 2
242.12	Second pick from manual feeder, tray 1, or feeder failed when media was in the source, other sheets were committed to the paper path.
242.16	Failed to feed from tray 2. Pages in the paper path have been flushed to the output bin.
251.00	Paper jam near the manual feeder.
251.10	Second pick attempt failed from manual feeder.
251.11	Failed to feed from manual feeder. Pages in the paper path have been flushed to the output bin.
251.12	Second pick from manual feeder, tray 1, or feeder failed when media was in the source while the other sheets were committed to the paper path.
251.19	Media never reached the input sensor from the manual feeder.



## Service error codes

Service error codes are generally non-recoverable except in an intermittent condition when POR is performed and the printer can temporarily recover from the error condition.

### Service error codes (9xx)

Error	Description
<b>Engine software service errors</b>	
902.xx	Engine software error
<b>Transfer service errors</b>	
917.00	Transfer service error
917.01	Transfer servo result too low.
<b>Fuser service errors</b>	
920.00	Under temperature during steady state control.
920.01	Fuser took too long to heat up after transitioning to new enhanced mode.
920.02	Fuser fell too far below desired temperature while printing.
920.03	Fuser too cool while checking for slope change.
920.04	Fuser too cool when heating to desired temperature after slope change.
920.05	Fuser under temperature while printing
920.06	Fuser under temperature while printing
920.07	Fuser under temperature while printing
920.08	Fuser temperature did not increase after IR recovery.
920.20	Belt fuser under temperature during steady state control. This can occur in printing or standby modes.
921.00	Under temperature during standby control.
921.01	Fuser temperature did not reach standby temperature after two attempts
922.00	Fuser failed to ramp to target temperature
922.01	Fuser did not reach standby temperature in time (standby control)
922.06	Fuser did not reach operating temperature in time (new enhanced control).
922.07	Media reached fuser nip and fuser is under temperature
922.08	Fuser warm-up failure (motor start condition)
922.09	Fuser warm-up failure (compression set)
922.20	Belt fuser failed to reach the preheat temperature for the motor to start during warm-up.
922.21	Belt fuser was under temperature when the media reached the fuser nip.
923.00	Fuser is over temperature.
923.01	Fuser is over temperature. This applies to the fuser and belt fusers.
924.00	Open thermistor check.

**Service error codes (9xx) (Continued)**


<b>Error</b>	<b>Description</b>
924.01	Open thermistor check failure. This applies to the fuser and belt fusers.
924.02	Open thermistor check failure. The ADC failed to converge. Possible noisy thermistor signal. This applies to the fuser and belt fusers.
925.01	Fuser detection performed and found error
<b>Fan service errors</b>	
927.00	Service fan error
927.03	Main fan took too long to ramp up
927.04	Main fan is under speed or stalled during speed adjustment state
927.05	Main fan overspeed during speed adjustment state.
927.06	Main fan capture data is invalid and speed control is at maximum in fan control idle state
927.07	Main fan capture data is invalid and speed control is at maximum in fan control adjustment state.
<b>Printhead service errors</b>	
931.00	No first hsync
931.01	No first hsync
932.00	Lost hsyncs
932.01	'Lost hsyncs
933.00	Printhead boost signal failure
935.10	Printhead sweep error, swept through Hz range without finding the resonant frequency
935.11	Printhead sweep error, autosweep hw state
935.12	Printhead sweep error, coarse sweep state
935.13	Printhead sweep error, init fine sweep state
935.14	Printhead sweep error, fine sweep state
935.15	Printhead sweep error, check prelim amp state
935.16	Printhead sweep error, enable amp Kp state
935.17	Printhead sweep error, amp Kp failed to converge
935.18	Printhead sweep error, enable amp Ki state
935.19	Printhead sweep error, amp Ki failed to converge
935.20	Printhead sweep error, enable offset controller state
935.21	Printhead sweep error, load scan regs state
935.22	Printhead sweep error, fwd and rev capture times differ by too much
935.23	Printhead sweep error, check sweep accuracy state
935.24	Printhead sweep error, reserved
935.25	Printhead sweep error, detected resonant frequency out of expected range

**Service error codes (9xx) (Continued)**

<b>Error</b>	<b>Description</b>
935.26	Printhead sweep error, timed out waiting for end of sweep
<b>Transport motor service errors</b>	
936.01	No lock detected at normal motor start
936.02	No lock detected at motor start for motor ID
936.03	No halls detected at motor start
936.04	Failed to stop within timeout
936.05	Stall detected during speed control
937.00	Main transport motor lost lock
937.01	Main transport motor lost lock, detected by engine control
937.02	Overspeed detected during position control
937.03	Overspeed detected during speed control
<b>Power supply service errors</b>	
940.00	LVPS service error
940.01	Line frequency outside allowed range of 45Hz-64Hz
940.02	Line frequency below 43Hz
940.03	No zero cross detected on belt fuser model

## Diagram of the printer menus

Not all menus or selections will be available on all models or in all situations. These are accessed through the driver.

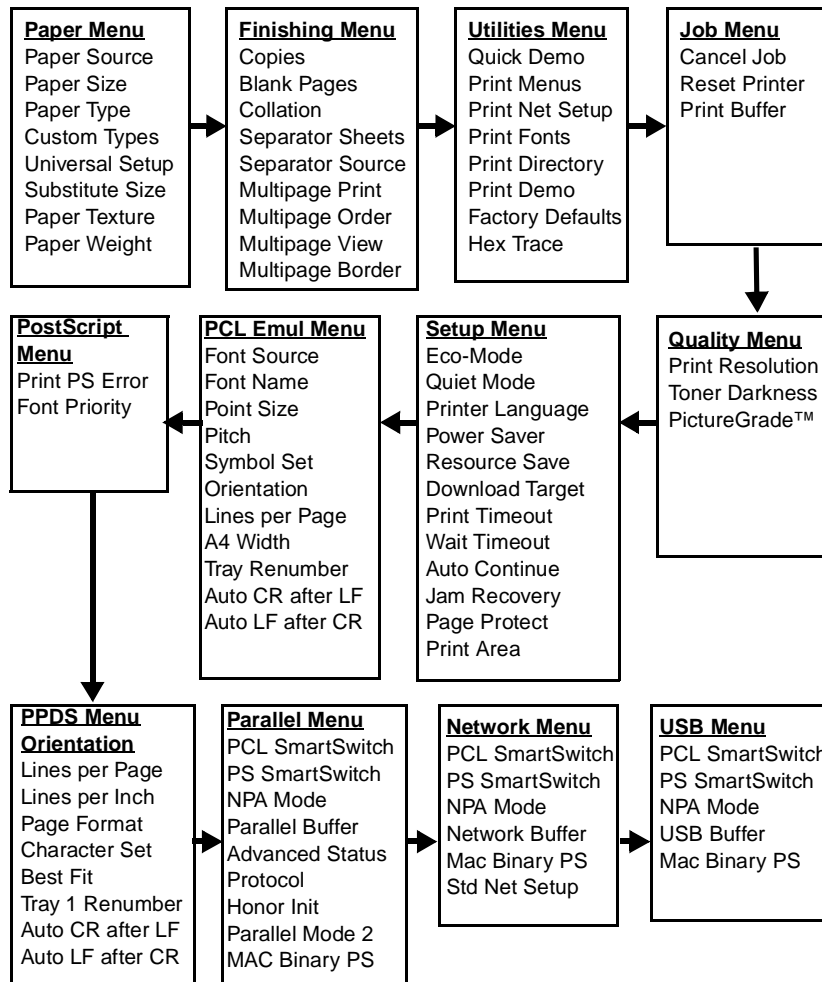

## Symptom tables

### *POST symptom table*

**Note:** Investigate any displayed codes before proceeding with these symptoms. For example, a missing toner cartridge will prevent POST from completing.

Symptom	Action
The main motor, cooling fan, and fuser do not come on.	See <b>“Cover interlock switch service check” on page 2-40.</b>
POST completes, except one or more lights do not come on.	See <b>“Operator panel service check” on page 2-43.</b>
None of the lights come on.	See <b>“Operator panel service check” on page 2-43.</b>
Main motor does not come on.	See <b>“Main motor service check” on page 2-42.</b>
Fan does not come on.	See <b>“Cooling fan service check” on page 2-40.</b>
Fuser does not cycle.	See <b>“Fuser service check” on page 2-41.</b>
Fuser does not turn on and off.	See <b>“Fuser service check” on page 2-41.</b>
The paper feed picks and tries to feed media.	See <b>“Paper feed service checks” on page 2-43.</b>

**Printer symptom table**

Symptom	Action
Dead machine (no power).	See <b>“Dead machine service check” on page 2-41.</b>
Fan noisy or fan not working.	See <b>“Cooling fan service check” on page 2-40.</b>
Fuser parts melted.	See <b>“LVPS/HVPS service check” on page 2-42.</b>
Toner not fused to the media.	See <b>“Fuser service check” on page 2-41</b> or <b>“Solving print quality problems” on page 3-50.</b>
Paper jams.	See <b>“Paper feed service checks” on page 2-43.</b>
Main motor noisy or not moving.	See <b>“Main motor service check” on page 2-42.</b>
Media skew.	See <b>“Paper feed service checks” on page 2-43.</b>
Printer not communicating with host.	See <b>“Parallel or USB port service check” on page 2-45.</b>
Front access cover will not close.	See <b>“Cover interlock switch service check” on page 2-40.</b>
Operator panel button not responding.	See <b>“Operator panel service check” on page 2-43.</b>
Operator panel lights are off or very dim.	See <b>“Operator panel service check” on page 2-43.</b>
Blank page.	See <b>“Blank page” on page 2-46.</b>
Black page.	See <b>“Black page” on page 2-47.</b>
Heavy background.	See <b>“Heavy background” on page 2-47.</b>
Light print.	See <b>“Light print” on page 2-49.</b>
White or black lines or bands.	See <b>“White or black lines or bands” on page 2-49.</b>
Toner on back of page.	See <b>“Toner on back of page” on page 2-49.</b>
Media never picks.	See <b>“Media never picks” on page 2-44.</b>
Media feeds continuously.	See <b>“Media picks during POST and/or continuously” on page 2-43.</b>
Media wrinkled or bent.	See <b>“Media “trees,” wrinkles, stacks poorly, or curls” on page 2-45.</b>
Print quality problems <ul style="list-style-type: none"> <li>• Light print</li> <li>• Blurred characters</li> <li>• Toner on both sides of media</li> <li>• Toner not fused</li> <li>• Streaks</li> <li>• Blank pages</li> </ul>	See <b>“Solving print quality problems” on page 3-50.</b>

## Service checks



Service checks which involve measuring voltages on the LVPS/HVPS (low voltage power supply/ high voltage power supply board) should be performed with the printer positioned on its back side.

**Note:** When making voltage readings, always use frame ground unless another ground is specified. See the wiring diagram in the back of the book for more information.

### Controller card service check

#### Controller card service check

FRU	Action
Controller card assembly  <b>Warning:</b> Do not replace the operator panel and controller card at the same time. Each card contains the printer settings. When either of these cards is new, it obtains some of the settings from the other card. Settings are lost when both are new and replaced at the same time.	<b>POST (Power-On Self Test)</b>  <b>Note:</b> The printer should complete POST in approximately 30 seconds.  If the printer fails to display lights or activate the drive motor, fuser or fan, check the following order: <ol style="list-style-type: none"> <li>1. Power to the LVPS/HVPS</li> <li>2. Power from the LVPS/HVPS to the controller card</li> <li>3. Cables are plugged in correctly, especially for the operator panel. The printer will not power-up without a functioning operator panel.</li> <li>4. The controller card assembly.</li> <li>5. The operator panel. See <b>“Operator panel service check” on page 3-43.</b></li> </ol>
	Verify +24 V dc input from the LVPS/HVPS. <ol style="list-style-type: none"> <li>1. Turn the printer off.</li> <li>2. Disconnect the LVPS/HVPS cable from the controller card at J19.</li> <li>3. Turn the printer on.</li> <li>4. Verify +24 V dc on positions 8 and 9 of the cable connector.</li> <li>5. If voltage is correct, check the continuity in the other conductors of the cable. If the cable is good, check the connectors to the controller board.</li> <li>6. Verify that pins 7 and 12 on both the cable and the card connector are grounded.</li> <li>7. If grounds are not correct on the cable, but the cable possesses continuity otherwise, check the LVPS/HVPS.</li> <li>8. If the grounds are not correct on the controller card, replace the controller card. (Check with one probe on the connector pin and the other on the card's ground plane found at each screw head.)</li> </ol>
	<b>Controller card voltage outputs</b>  Turn the printer off, and plug the LVPS/HVPS cable into J19 of the controller card. See the wiring diagram at the end of the book which identifies the voltages and grounds for a good controller card.  Turn the printer off before plugging or unplugging any connectors.

**Controller card service check (Continued)**

FRU	Action								
LVPS/HVPS	<p><b>Verify main power to controller card</b></p> <p>With the printer off, unplug the LPS/HVPS cable at J19 on the controller card. Verify grounds on pins 7, 12, and 14 for both the cable and the controller card. If any of these grounds are incorrect, check the cable for continuity. Replace the cable or the respective card as necessary.</p> <p>Turn the printer on with the cable still unplugged, and verify the following on the cable (controller card will not be powered):</p> <table border="1"> <thead> <tr> <th>Pins</th><th>Voltage</th></tr> </thead> <tbody> <tr> <td>J19-8</td><td>+24 V dc</td></tr> <tr> <td>J19-9</td><td>+24 V dc</td></tr> <tr> <td>J19-13</td><td>+5 V dc</td></tr> </tbody> </table> <p>If any of the voltages are incorrect, replace the LVPS/HVPS. See <b>“Dead machine service check” on page 2-41</b>.</p>	Pins	Voltage	J19-8	+24 V dc	J19-9	+24 V dc	J19-13	+5 V dc
Pins	Voltage								
J19-8	+24 V dc								
J19-9	+24 V dc								
J19-13	+5 V dc								

**Cooling fan service check**

FRU	Action
Cooling fan	<p>Make sure the fan cable plug is properly seated at J4 (controller card).</p> <p>Turn the printer off, and disconnect the cooling fan cable from the controller card.</p> <p>Turn the printer on. Within a few seconds, the controller card assembly should apply +24 V dc to pin 2.</p> <ul style="list-style-type: none"> <li>• If voltage is present and the fan is not turning, replace the cooling fan. If the fan still doesn't function, replace the controller card.</li> <li>• If voltage is not present, check the controller card.</li> </ul>

**Cover interlock switch service check**

**Note:** Make sure a toner cartridge assembly is installed and the cover closes all the way, engaging the cover open switch lever.

FRU	Action
Cover interlock switch	<p>Disconnect the cover interlock cable from the controller card at J6.</p> <p>With the printer turned off, verify continuity between cable pin 1 and pin 2 with the door closed and discontinuity with the door open.</p> <p>Verify continuity between cable pin 1 and pin 3 with the door open and discontinuity with the door closed.</p> <p>Verify discontinuity between cable pins 2 and 3 whether the door is open or closed.</p> <ul style="list-style-type: none"> <li>• If either fails, replace the cover interlock switch.</li> <li>• If both pass continuity, turn the printer on, and measure +5 V dc on pin 2 at J6 on the controller card.</li> <li>• Verify pin 3 at J6 is ground.</li> <li>• If voltage or ground is not present, see <b>“Controller card service check” on page 2-39</b> for more information.</li> </ul>



## Dead machine service check



**CAUTION:** Check the AC line voltage. The voltage should be within the following limits:

- 100 V ac (volts alternating current) – 127 V ac for the 110 V printer
- 200 V ac – 240 V ac for the 220 V printer

FRU	Action
 LVPS/HVPS	<p>Unplug the printer. Remove the LVPS/HVPS, and check the fuses for continuity.</p> <ul style="list-style-type: none"> <li>• If open, replace the LVPS/HVPS.</li> <li>• If not open, check the switch continuity across its conductors with the switch on. Turn the switch off. Plug the AC line into the LVPS/HVPS and switch unit on.</li> </ul> <p><b>Note:</b> Voltages may be exposed at several places on the board. Do these verifications, and then unplug the card:</p> <ul style="list-style-type: none"> <li>• Verify 24 V dc on pins 8 and 9 at PCN1.</li> <li>• Verify approximately 3V on pins 1–3.</li> <li>• Verify approximately 5V on pins 4 and 13.</li> <li>• If voltages are not correct, replace the LVPS/HVPS.</li> <li>• If voltages are correct, check the controller card. See <b>“Controller card removal” on page 4-13.</b></li> </ul>

## Fuser service check

When toner is partially fused to the media, it is usually caused by low fuser temperature.

The line voltage to the printer must be within the following limits:

- 100 V ac–127 V ac for the 110 V model printer
- 200 V ac–240 V ac for the 220 V model printer




This printer uses a belt fuser and therefore does not have a lamp.


Fuser service check

FRU	Action
 Fuser power cable LVPS/HVPS Fuser	<p>Unplug the printer, and disconnect the fuser cable plug from the LVPS/HVPS board connector at PCN5.</p> <p>Check for continuity across the fuser by checking across the connector pins.</p> <ul style="list-style-type: none"> <li>• If there is continuity, check the LVPS/HVPS. See <b>“LVPS/HVPS service check” on page 3-42.</b></li> <li>• If there is no continuity, disconnect the fuser power cable at both ends and check each conductor for continuity. Replace cable if necessary.</li> <li>• If the cable tests good, replace the fuser.</li> </ul> <p>Make sure the fuser thermistor is correctly connected to the controller board at J13. If the problem persists, disconnect the thermistor cable and check for less than +5 V dc on pin 1. Pin 2 should be ground. If line voltage is incorrect on pin 1, see <b>“Controller card service check” on page 2-39</b> for more information.</p>
 Fuser	<p>Disconnect the thermistor cable from J13 on the controller card.</p> <p>Measure the resistance across the ends of the thermistor cable.</p> <p>Replace the fuser assembly if the resistance is lower than 1K ohm or shorted.</p> <p><b>Note:</b> Resistance measures approximately 400K ohms when cool and 1K ohms hot.</p>

**LVPS/HVPS service check**

FRU	Action
 LVPS/HVPS	<p><b>LVPS portion of board</b> Fuses that open typically indicate a faulty LVPS/HVPS.</p> <p>Disconnect the power cable, and open the LVPS/HVPS enough to test the switch. The switch will show continuity across the conductors with a meter when the switch is on. If the switch is good, see <b>“Dead machine service check” on page 2-41</b> for more diagnostics.</p> <p><b>HVPS portion of board</b> Problems with the HVPS are exhibited in the print quality. See <b>“” on page 2-45</b> for more information.</p>

**Main motor service check**

FRU	Action								
 Main gear drive Main motor cable LVPS/HVPS Controller card  <b>Warning:</b> Do not replace the operator panel and controller card at the same time. Each card contains the printer settings. When either of these cards is new, it obtains the settings from the other card. Settings are lost when both are new and replaced at the same time.	<p>Turn off the printer, and unplug the main motor cable at J17. Turn on the printer, and check for the following voltages at J17:</p> <table border="1"> <thead> <tr> <th>J17 pins</th><th>Voltages</th></tr> </thead> <tbody> <tr> <td>Pins 1–4</td><td>Approx. +3.3 V dc</td></tr> <tr> <td>Pin 6</td><td>Approx. +5 V dc</td></tr> <tr> <td>Pins 7–9</td><td>10 V dc–24 V dc</td></tr> </tbody> </table> <p>Verify ground at pin 5 for both the card and cable.</p> <ul style="list-style-type: none"> <li>If these voltages are correct, check the main motor cable for continuity. <ul style="list-style-type: none"> <li>Remove the left side cover to access the connector on the motor.</li> <li>If continuity exists on each wire, replace the main gear drive which includes the motor.</li> <li>If continuity does not exist on one or more of the wires, replace the motor cable.</li> </ul> </li> <li>If these voltages are not correct, see <b>“Controller card connector pin values” on page 5-2</b>, or replace the controller card. See <b>“Controller card removal” on page 4-13</b>.</li> </ul>	J17 pins	Voltages	Pins 1–4	Approx. +3.3 V dc	Pin 6	Approx. +5 V dc	Pins 7–9	10 V dc–24 V dc
J17 pins	Voltages								
Pins 1–4	Approx. +3.3 V dc								
Pin 6	Approx. +5 V dc								
Pins 7–9	10 V dc–24 V dc								

## Operator panel service check

Inspect the operator panel cable for damage. Make sure the cable is plugged in securely. Run POST, and check each light for proper operation. See **“Power-On Self Test (POST) sequence” on page 2-2.**

### LED Operator panel service check

FRU	Action
Operator panel (LED) Controller card  <b>Warning:</b> Do not replace the operator panel and controller card at the same time. Each card contains the printer settings. When either of these cards is new, it obtains the settings from the other card. Settings are lost when both are new and replaced at the same time.	<p><b>Lights</b></p> <p>If none of the lights come on, open the controller card cage and locate the operator panel connector at J3. Make sure the cable is properly connected to the controller card and the controller card has input voltage to it.</p> <p>With the printer on, verify the following without disconnecting the cable:</p> <ul style="list-style-type: none"> <li>• Pins 1, 3, 5, and 6—3.3 v</li> <li>• Pin 2—5 v</li> <li>• Pins 4 and 7—GND</li> </ul> <p>If these are correct and the operator panel is not functioning, replace the operator panel.</p> <p>If any are incorrect, see <b>“Controller card service check” on page 3-39.</b></p> <p><b>Buttons</b></p> <p>If the buttons do not respond, replace the operator panel. There is no test or repair for the faulty switches.</p>

## Paper feed service checks

### Paper jam error indication during POST

FRU	Action
Fuser (exit sensor)	If the exit sensor flag, which is visible at the back of the fuser, is in any position other than vertical, the printer will display a paper jam. Make sure the flag is operating freely. Replace the fuser if the sensor is damaged.
Input/duplex sensor Manual feed sensor	Make sure the input paper feed sensors are working properly. A stuck or incorrectly installed sensor causes a paper jam.

### Media picks during POST and/or continuously

FRU	Action
ACM Manual feed clutch	<p>Check the ACM clutch for wear. The solenoid interacts with the clutch to control the motion of the pick tires.</p> <p>If the ratchet teeth of the ACM clutch assembly are worn or broken, the solenoid may not stop the ACM from rotating. Replace the ACM clutch assembly if necessary.</p> <p>Check the manual feed clutch for damage.</p>

**Media picks but stops halfway through the printer**

FRU	Action
Input/duplex sensors (under toner cartridge assembly) Input sensor (manual)	<p>Make sure the input sensors are working properly.</p> <p>Check for a broken or stuck flag on the input sensors.</p> <p>Make sure the cables are seated on the controller card at J23 (Tray 1 input) and J20 (manual input).</p> <p>Check for about +5 V dc on pin 6 at J23 (Input/duplex sensors) and pin 3 at J20 (Input sensor).</p> <ul style="list-style-type: none"> <li>• If correct, replace the input paper feed sensor.</li> <li>• If these voltages are not correct, replace the controller card.</li> </ul>

**Media never picks**

FRU	Action
Paper feed (pick tires) tray 1 Paper feed (pick tires) tray 2 Media drive ASM Media feed clutch ASM Manual feed clutch ASM P/U and manual feed solenoid ACM drive shaft	<p>Open the left cover, and verify that the solenoids and clutches are functioning when an attempt is made to feed the media.</p> <p>Make sure the rubber tires on the ACM are installed and clean.</p> <p>Replace the tires, ACM drive, clutch assemblies, solenoids, or drive shaft as necessary.</p>


**Media occasionally mispicks or picks multiple sheets at once**

FRU	Action
Tray 1 Tray 2 (option)	<p>Check tray for media catch points.</p> <p>If the sheet being fed stops momentarily, the ACM applies additional vertical force, causing additional sheets to feed.</p> <p>Do not mix media types in one tray.</p>
Paper pick tires (Tray 1 or tray 2)	<p>Check the tires in the ACM assembly for signs of wear or damage.</p> <p>Replace the tires as necessary.</p>
ACM clutch complete bill of material (CBM) Manual feed clutch CBM Media feed clutch ASM (tray 1 only) Manual feed clutch ASM	<p>Open left cover, and observe the solenoid and clutch actions at the ACM and manual feed shafts as a print job is attempted.</p> <p>Replace the faulty part.</p>
Controller card P/U and manual feed solenoid ASM.	<p>Disconnect the solenoid cable at J21 on the controller card.</p> <p>Measure the resistance across cable pins 1 and 2 and then pins 3 and 4.</p> <ul style="list-style-type: none"> <li>• The resistance should be 180–250 ohms.</li> <li>• If it is not, replace the solenoid assembly.</li> <li>• If the resistance is 180–250 ohms, check the controller card. See <b>“Controller card service check” on page 2-39</b> for more information.</li> </ul> <p>Replace controller card as necessary.</p>



## Media skews

FRU	Action
Paper feed (pick tires) tray 1 Paper feed (pick tires) tray 2 Tray 1 Tray 2 (option)	Check tires for debris. If tires are new, try reversing each on its hub.  Check side guides on Tray 1 and Tray 2. Guides set for a full stack of media may be too wide when the stack is short.

## Media “trees,” wrinkles, stacks poorly, or curls

FRU	Action
Fuser	<p>This problem is most likely due to a worn backup roll. It causes the printer to run hotter than required for the media being printed. Excessive heat can cause media treeing problems, poor stacking, or curl.</p> <p>Print the menu sheet (press and release  with the printer in ready mode).</p> <p>Look at the media settings. Some, such as card stock or rough texture, may require a higher fuser temperature, which leads to more of these problems (except stacking) in plain paper.</p> <ul style="list-style-type: none"> <li>• Change settings using the printer driver.</li> <li>• Use the local printer setup utility (included on the CD) to change the NVRAM settings.</li> </ul> <p>Try a different ream of paper. Moist media has a higher tendency to crease (treeing) and curl.</p>

## Parallel or USB port service check







1. Perform a print test to make sure the printer prints correctly. Verify  is on, then press  to print menu settings.
2. Be sure the printer parallel cable is designed for bidirectional printing.
3. Be sure the user's application is set up correctly.
4. If the internal print test page prints correctly, the user's application/printer driver is set up correctly, and the correct bidirectional parallel cable is installed, but the printer still fails to print on command from the host computer, replace the controller card.
5. Check the USB cable for continuity.

## Print quality service checks

**Note:** Ensure the cover closes tightly. A gap in the opening may allow light to expose the photoconductor resulting in a 'dirty' print. Extreme environmental conditions, temperatures, and humidity will affect the print quality.

### Using print quality test pages


To help isolate print quality problems, like streaking, print test pages using the print quality test pages. To print the print quality test pages:

1. Enter Configuration Menu.
  - a. Turn off the printer.
  - b. Open the front access cover.
  - c. Turn on the printer while pressing and holding .
  - d. When  light stays on, close cover.
  - e. Wait (approximately 10 seconds).
2. Press and release  three times until the  and  lights come on.
3. Press and hold  until all the lights flash to initiate printing the quality test pages.  
Four pages print to help evaluate print quality. The first page has various fonts and a graphic, the second page is gray with graphics, the third page is black, and the last page is blank. Once the media exits into the output bin, the printer returns to the home state (four top lights on).
4. Use the test pages to isolate problems such as light or toner streaks. See **"POST symptom table" on page 2-37** for solutions to these problems.

To exit print quality test pages, turn the printer off.


**Note:** Refer to the print defects guide at the end of the manual for repeating defects.

### Blank page

FRU	Action
Toner cartridge (not a FRU)	Remove the toner cartridge, and gently shake it to evenly distribute the toner. Check for cartridge damage.
 Printhead LVPS/HVPS Controller card	Blank pages can be caused by a defective printhead assembly, LVPS/HVPS, or controller card. <ul style="list-style-type: none"> <li>• Printhead errors typically result in printer service errors unless there is blockage of the beam or dust on the lens.</li> <li>• Blank pages typically are caused by the PC roll not being properly charged. Try a different PC kit.</li> </ul> Unplug the printer, and check the cable continuity between the LVPS/HVPS connector marked OPC (at PCN 2) and the corresponding wire form (spring) found about 14 mm above and to the right of the transfer roll gear. <ul style="list-style-type: none"> <li>• If there is not continuity, call the next level of service.</li> </ul> Try a different toner cartridge and PC kit. <ul style="list-style-type: none"> <li>• If those fail, replace the LVPS/HVPS, controller card, or the printhead in that order.</li> </ul> Also, see <b>"Solving print quality problems" on page 3-50</b> .


## Black page

**Note:** Incorrect laser exposure or incorrect charging of the photoconductor causes an all black page. Always verify the same results from a different toner cartridge assembly and developer before proceeding.

FRU	Action
Toner electrodes (not a FRU)	<p>Check the three rearward electrodes below the toner cartridge assembly for contamination or damage. Correct as necessary.</p> <p>Check continuity between the cable (DEV, TAR, and doctor blade) connection PCN3 and on the contact tips below the toner cartridge assembly.</p> <ul style="list-style-type: none"> <li>• If continuity fails, call the next level of service.</li> </ul>
 <p>LVPS/HVPS board Controller card Miscellaneous cables</p>	<p>With the printer off, disconnect the LVPS/HVPS cable from J19 on the controller card.</p> <p>Turn the printer on, and verify +24 V dc on pins 8 and 9 of the cable.</p> <p>Verify ground on pins 7, 12, and 14.</p> <ul style="list-style-type: none"> <li>• If the voltage is incorrect, replace LVPS/HVPS board.</li> <li>• If grounds are incorrect, check ground paths.</li> <li>• Check continuity in the cable. Replace the cable if necessary.</li> <li>• If voltage is correct and the toner electrodes are good, replace the controller card.</li> <li>• See the <b>“LVPS/HVPS service check” on page 2-42</b> and the <b>“Controller card service check” on page 2-39</b>, if necessary.</li> </ul>

## Heavy background

Poor development or poorly charged toner particles cause excessive background. This is more noticeable as the toner cartridge nears end-of-life.

FRU	Action
Toner cartridge (not a FRU) PC Kit (not a FRU)	<p>Check the toner darkness setting in the driver. Try a lower setting.</p> <p>Make sure the toner cartridge and PC Kit are correctly installed and the high voltage contacts are clean.</p> <p>If the toner cartridge and PC Kit are installed correctly, try a new PC Kit first and then toner cartridge.</p>
 <p>LVPS/HVPS Controller card</p>	<p>Check the contacts for correct installation and contamination where contact is made between the toner cartridge assembly and spring contacts which connect to the LVPS/HVPS board at PCN3. Clean as necessary.</p> <p>If this does not correct the problem, replace the following FRUs one at a time in the order shown:</p> <ul style="list-style-type: none"> <li>• LVPS/HVPS board (See <b>“Black page” on page 3-47</b> for pin values.)</li> <li>• Controller card</li> </ul>

**Partial blank image/white spots (no repeating pattern)**

FRU	Action
Toner cartridge (not a FRU)	<p>Remove the toner cartridge assembly and gently shake the assembly to evenly distribute the toner.</p> <p>Check to make sure that the laser light path is not blocked.</p> <p>If toner cartridge is low, try a new one.</p>
Paper (not a FRU)	<p>Make sure recommended media is being used.</p> <p>Check the media settings in the printer driver. A heavier media may require higher heat to properly fuse.</p>

**Variation in image density horizontally across page**


FRU	Action
PC Kit (not a FRU)	<p>The charge roll may have an unbalanced force against the PC (photoconductor) drum.</p> <p>Try a new PC Kit.</p>
Transfer roll	<p><b>Note:</b> Do not touch the transfer roll except at its ends. Place a sheet of paper over the roll to prevent damage from finger oils or hand lotion.</p> <p>Check the springs in the left and right transfer roll bearings. The bearing assemblies should support the transfer roll, applying evenly distributed forces to the PC drum.</p> <p>Replace the transfer roll assembly if the springs or bearings show signs of damage or fatigue.</p> <p>Inspect the transfer roll for signs of wear, damage or contamination.</p> <p>Replace as necessary.</p>

**Poor fusing of image**

FRU	Action
Fuser	<p>The fuser may not be operating at the proper temperature to fuse the toner to the paper. See <b>“LVPS/HVPS service check” on page 2-42</b> for more information. Try changing the setting to heavier paper or even card stock.<sup>1</sup></p>
Media (not a FRU)	<p>Make sure recommended media is being used.</p> <p>Check the media settings in the printer driver.</p>




**Light print**

FRU	Action
Toner cartridge (not a FRU)	<p>Make sure the toner cartridge and PC Kit are installed correctly and that the toner cartridge is not low on toner.</p> <p>If the problem continues, install a new toner cartridge.</p> <p>Recheck condition before replacing PC Kit, if necessary.</p>
 <p>Transfer roll LVPS/HVPS card</p>	<p>Check the transfer roll for signs of toner buildup and contamination.</p> <p>Inspect the HVPS contact (transfer roll) for contamination.</p> <p>Verify the high voltage cable is plugged into the LVPS/HVPS.</p> <p>If all components appear free of contamination, replace the following FRUs one at a time in the order shown:</p> <ul style="list-style-type: none"> <li>• Transfer roll</li> <li>• LVPS/HVPS card</li> </ul>

**White or black lines or bands**

FRU	Action
Print cartridge assembly (not a FRU) Developer drive coupling assembly Main gear drive	<p>Banding appears as light or dark horizontal lines on a uniformly gray page or on a page with a large area of graphics. Banding is primarily due to a variation in the speed of the media as it feeds through the printer, especially in the developer and transfer process. It may also be a result of overly dry or moist environments.</p> <p>With the printer off, check to make sure that the laser beam is not blocked.</p> <p>Inspect the toner cartridge and paper feed components, especially the drive coupler and drive gears for debris, binds, or damage.</p>




**Toner on back of page**

FRU	Action
PC Kit (not a FRU)	<p>Print a menu page (press and release  when the printer is in ready state) and check settings for media type.</p> <p>Inspect the overall paper path for signs of spilled toner.</p> <p>Gently clean the contaminated areas with a soft cloth.</p>
Fuser	<p>Inspect the fuser for signs of contamination.</p> <p>Replace the fuser as necessary.</p>
Transfer roll	<p>A transfer roll contaminated with toner can cause toner to transfer to the back of pages.</p> <p>Inspect the transfer roll for contamination, and replace as necessary.</p>







## Solving print quality problems

**Note:** Refer to the print defects guide at the end of the manual for repeating defects.




### Print quality problems

Problem	Cause/action
<p>Light or blurred characters.</p> 	<p><b>Light print</b> See <b>“Light print” on page 2-49.</b></p> <p>The toner cartridge may be getting low on toner:</p> <ul style="list-style-type: none"> <li>• Remove the toner cartridge and toner cartridge assembly.</li> <li>• Shake it from side to side to redistribute the toner.</li> <li>• Reinstall it and recheck for condition.</li> <li>• Make sure to use the recommended print media (see media types and sizes in the <i>User's Reference</i>).</li> <li>• Use MarkVision™ to define the custom type setting for media type, media texture, or media weight.</li> <li>• The toner cartridge or PC Kit may be defective. Replace the PC Kit first and recheck.</li> </ul> <p><b>Blurred characters</b> Blurred images, including characters, are usually caused by a defective printhead.</p> <p><b>Vertical white lines</b> See <b>“Vertical streaks”</b> below.</p> <p>Vertical white lines may be caused by the laser beam, which may be partially blocked. With the printer off, clear the path or clean the lens. The toner cartridge or fuser may be defective. Try a different toner cartridge. Inspect the fuser at its entry for debris.</p>
<p>Toner smudges appear on the front or back of the page.</p> 	<ul style="list-style-type: none"> <li>• Make sure the media is straight and unwrinkled.</li> <li>• Replace the PC Kit, and recheck before replacing the toner cartridge. See <b>“Toner on back of page” on page 2-49</b> for more information.</li> </ul>
<p>Vertical or horizontal streaks appear on the page.</p> 	<p><b>Vertical streaks</b> Something could be caught between the PC kit and the fuser. Check the paper path around the fuser entry. Try a different toner cartridge.</p> <p>Vertical white lines may be caused by the laser beam, which may be partially blocked. With the printer off, clear the path or clean the lens. The toner cartridge or fuser may be defective. Try a different toner cartridge. Inspect the fuser at its entry for debris.</p> <p><b>Horizontal streaks</b> The toner cartridge or the fuser may be the cause due to excessive page count or defect. Replace as needed.</p> <p>If the lines are parallel and match the two intended ghost images, the Form Type may be incorrectly set. Check those settings.</p> <p>The PC cleaner sump may be full. Replace the PC kit.</p>

## Print quality problems (Continued)

Problem	Cause/action
<p>Toner smears or rubs off the page.</p> 	<ul style="list-style-type: none"> <li>• Toner is not being fused to the paper. Replace the fuser.</li> <li>• Change the media texture setting in the driver. If special media is being used, such as card stock or labels, be sure to select the correct media type.</li> <li>• Try a different kind of paper. Paper designed for copiers gives the best quality fusing.</li> </ul>
<p>The print is getting light, but the printer has not indicated it is low on toner.</p>	<ul style="list-style-type: none"> <li>• Toner is becoming low in the cartridge.</li> <li>• The /  light message does not display if the 1,500 page toner cartridge is installed.</li> <li>• Remove the toner cartridge, and gently shake it from side to side to redistribute the toner.</li> <li>• Replace the toner cartridge.</li> </ul>
<p>The /  light displays.</p>	<ul style="list-style-type: none"> <li>• Remove the toner cartridge, and gently shake it from side to side to redistribute the toner.</li> <li>• Replace the toner cartridge.</li> </ul>
<p>Solid black areas on transparencies</p>	<ul style="list-style-type: none"> <li>• There is a mismatch in the transparency and what the software is expecting.</li> <li>• Choose a different fill pattern in the software program.</li> <li>• Remove the toner cartridge, and gently shake it from side to side to redistribute the toner.</li> <li>• Try a different type of transparency.</li> <li>• Replace the toner cartridge.</li> </ul>
<p>Faint images or repetitive spots appear on the page.</p>	<ul style="list-style-type: none"> <li>• Select a different media type or form type setting from the printer driver.</li> <li>• Try a different type of paper. Media designed for copiers gives the best quality.</li> <li>• Replace the toner cartridge.</li> </ul>
<p>Pages are blank.</p> 	<ul style="list-style-type: none"> <li>• The toner cartridge may be out of toner or defective. Replace the cartridge.</li> <li>• There may be a software error. Re-initialize the printer by turning it off and back on.</li> <li>• With the printer off, check the printhead beam path. If clear, check for a printhead error on POR. See <b>“Printhead service check” on page 2-53.</b></li> <li>• Also, see <b>“Blank page” on page 3-46.</b></li> </ul>


## Print quality problems (Continued)

Problem	Cause/action
The printer is on and indicates ready, but nothing prints.	<ul style="list-style-type: none"> <li>• Make sure the parallel or USB cable is not damaged and is firmly plugged into the connector on the back of the printer.</li> <li>• Make sure the toner cartridge assembly is installed properly.</li> <li>• Press and release  to print a menu settings page. <ul style="list-style-type: none"> <li>- If a menu settings page cannot be printed, contact the next level of support.</li> <li>- If a menu settings page can be printed, the problem is one of the following: <ul style="list-style-type: none"> <li>• Computer</li> <li>• Software program</li> <li>• Cable</li> <li>• (USB only) A failed controller card. Replace card.</li> </ul> </li> </ul> </li> </ul> <p><b>Note:</b> Test by unplugging USB and plugging it with the printer on. If the computer indicates "unknown device," replace the controller card.</p>
Toner Low light is on and printing stops.	If a 3.5K or more page toner cartridge is being used and the Toner Low alarm is set to on, the printer stops printing until the toner cartridge is replaced.
The Error light alone is on.	Make sure the printer front cover is closed.
The Toner Low light is blinking, and the Error light is on.	<ul style="list-style-type: none"> <li>• Make sure the toner cartridge is installed correctly.</li> <li>• Install a new toner cartridge.</li> </ul>
The media skews or buckles.	<ul style="list-style-type: none"> <li>• Tray is overfilled or media is too loose.</li> <li>• Don't overfill Tray 1 or the optional Tray 2 (see media capacities in the media types and sizes table in the <i>User's Guide</i>).</li> <li>• Make sure the paper guides are flush against the edges of the media.</li> </ul>
The media sticks together, resulting in the printer feeding multiple sheets.	<ul style="list-style-type: none"> <li>• The friction between sheets is too high.</li> <li>• Remove the media from Tray 1 or Tray 2, and fan it.</li> <li>• Don't overfill Tray 1 or the optional Tray 2 (see media capacities in the media types and sizes chart in the <i>User's Reference</i>).</li> </ul>
The media fails to feed from Tray 1.	<ul style="list-style-type: none"> <li>• Frictional force between tires and media is less than resisting force.</li> <li>• Remove the media from Tray 1, and fan it.</li> <li>• Make sure Tray 1 is selected from the printer driver. Do not overfill the tray.</li> <li>• Check the condition of the rubber on the paper feed rolls. Replace if worn or contaminated.</li> <li>• Verify that the ACM clutch is functioning correctly.</li> </ul>
The media fails to feed from the optional Tray 2.	<ul style="list-style-type: none"> <li>• Incorrect tray selection or inadequate picking force by tires.</li> <li>• Make sure the correct tray and media type are selected from the driver.</li> <li>• Make sure the tray is pushed all the way in.</li> <li>• Remove the media from the optional Tray 2, fan it, and reload.</li> <li>• Check the rubber on the paper feed tires for dirt or any other debris. Replace as necessary.</li> <li>• Check the paper path in the tray for burrs or debris that may hinder media movement.</li> <li>• Make sure the media does not exceed the stack height indicator.</li> </ul>
The Load Paper light is on even though there is media loaded in the optional Tray 2.	<ul style="list-style-type: none"> <li>• The input sensor does not sense media after picking.</li> <li>• Make sure the tray is pushed all the way in.</li> <li>• Press .</li> <li>• Check the feed tires. (See two preceding actions.)</li> </ul>
The printer does not print after a paper jam has been cleared.	<ul style="list-style-type: none"> <li>• The printer is waiting on the next command.</li> <li>• Clear all jams.</li> <li>• Press and release , or open and close the printer cover to restart the printer.</li> <li>• Make sure the toner cartridge assembly is installed properly.</li> </ul>


**Print quality problems (Continued)**

Problem	Cause/action
Unexpected characters print or characters are missing.	<ul style="list-style-type: none"> <li>• Ensure correct printer driver is being used.</li> <li>• Select hex trace mode to determine what the problem is.</li> <li>• Restore factory defaults.</li> <li>• Make sure the parallel cable or USB cable is firmly plugged in at the back of the printer.</li> </ul>
Jobs are not printing, and the error light is on solid.	<ul style="list-style-type: none"> <li>• The printer is waiting for an appropriate command.</li> <li>• Make sure the toner cartridge assembly is installed properly.</li> <li>• Make sure the printer front cover is closed.</li> </ul>
While in PostScript 3 emulation, the printer is flushing data (Ready/Data and Error lights are blinking).	<ul style="list-style-type: none"> <li>• Ensure the correct PostScript driver is being used.</li> <li>• The printer doesn't have enough memory to print the job. Install more memory.</li> </ul>

**Printhead service check**

FRU	Action
 <p>Printhead</p> <p><b>Note:</b> New printhead must be aligned. See <b>"Printhead assembly electronic adjustment" on page 3-9.</b></p>	<p>Turn the printer off.</p> <p>Disconnect the printhead cables from J8 and J15 on the controller card.</p> <p>Turn the printer on with the front door closed.</p> <p>On the controller card, verify +5 V dc on pin 10 at J8 and +5 V dc on pins 1 and 2 at J15.</p> <p>Verify grounds on pins 2, 4, and 7 at J8 and on pin 4 at J15.</p> <ul style="list-style-type: none"> <li>• If voltages or grounds are incorrect, check the controller card. See <b>"Controller card service check" on page 2-39</b> for more information.</li> <li>• If voltages are correct, replace the printhead (comes with cables).</li> </ul>





**Transfer roll service check**

FRU	Action
 <p>Transfer roll</p>	<p><b>Note:</b> Do not touch the transfer roll except at its ends. Place a sheet of paper over the roll to prevent damage from finger oils or hand lotion.</p> <p>Check the springs in the left and right transfer roll bearings. Do not try to move the left spring. The bearing assemblies should support the transfer roll, applying evenly distributed forces to the PC drum.</p> <p>Replace the transfer roll assembly if the springs or bearings show signs of damage or fatigue.</p> <p>Inspect the transfer roll for signs of wear, damage or contamination.</p> <p>Replace as necessary.</p>





### 3. Diagnostic aids

#### Accessing service menus

Enter Configuration Menu	<ol style="list-style-type: none"> <li>1. Turn off the printer.</li> <li>2. Open the front access cover and turn on the printer while pressing and holding .</li> <li>3. Close the cover once the  light displays.</li> </ol>	<p>The Configuration menu group contains a set of menus, settings and operations which are infrequently required by a user. Generally, the options made available in this menu group are used to configure a printer for operation.</p> <p>See <b>“Configuration Menu printout sample” on page 3-2</b> or <b>“Configuration menu selections” on page 3-4</b> for details on the available settings.</p>
Diagnostics mode	<ol style="list-style-type: none"> <li>1. Turn off the printer.</li> <li>2. Open the front access cover and press and hold  while turning on the printer.</li> <li>3. Close the cover when the  light displays.</li> </ol>	<p>The diagnostic group contains menu settings and operations that are useful in the manufacturing of the printer. It also features other aids in diagnosing problems.</p> <p>See <b>“Diagnostics mode printout sample” on page 3-3</b> or <b>“Diagnostics mode selections” on page 3-8</b> for details on the available settings.</p>

#### Printing menus






Print Configuration menus by pressing and holding  until the lights flash, then release the button. The Configuration Mode Instruction page will print.

Print Diagnostic menus by pressing and holding  until the lights flash, then release the button. The Ready/Data LED will blink when the page is being formatted and printed.

**Note:** The Configuration Mode Instruction page and Diagnostic menu page in this manual are samples only and may not match your specific machine.

#### Moving around the menu

**“Configuration Menu printout sample” on page 3-2** and **“Diagnostics mode printout sample” on page 3-3** are similar to the instructions printed by following steps 1–3 above. These menu items are designated by the non-indented items listed along the left edge of the page (Bottom as printed from printer). These items are also unshaded.

- Press and release  to move sequentially from one menu item to another.
- Press and hold  to jump to home state (top four lights on).
- Press and release  to move through the menu settings (indicated by  and  lights).
- This action rotates only through the possible settings of the selected menu item.

## Configuration Menu printout sample

**Note:** The light sequences change relative to the option on the printer.

## Printer Settings Configuration

This page explains how to access the printer menus and change values. Menus are represented by Continue, Ready/Data, Toner Low, and Load/Remove Paper light sequences. Menu items and their values are indicated by Paper Jam and Error light sequences.

Use the illustration to help you find the menu and value you want to change. The Paper Jam and Error lights show the current value of the Menu item.

- 1 Press and release Cancel to advance through the menus and menu items to the one you need.
- 2 Press and release Continue to advance to the value you need.
- 3 Press and hold Continue until all of the lights cycle to perform the function or to save the value.
- 4 Press and hold Cancel until all of the lights cycle to return to the Home menu.
- 5 Turn the printer off to exit the menus.

### Menus, menu items, and values

[illegible]

- Light On
- Light Off
- ✳ Light Blinking

Value



## Diagnostics mode printout sample

**Note:** The light sequences change relative to the options on the printer.

## Printer Diagnostics


This page explains how to access the printer menus and change values. Menus are represented by Continue, Ready/Data, Toner Low, and Load/Remove Paper light sequences. Menu items and their values are indicated by Paper Jam and Error light sequences.

Use the illustration to help you find the menu and value you want to change. The Paper Jam and Error lights show the current value of the menu item.

- 1 Press and release Cancel to advance through the menus and menu items to the one you need.
- 2 Press and release Continue to advance to the value you need.
- 3 Press and hold Continue until all of the lights cycle to perform the function or to save the value.
- 4 Press and hold Cancel until all of the lights cycle to return to the Home menu.
- 5 Turn the printer off to exit the menus.



Menus, menu items, and values


	Press Continue	Ready/Date	Toner Low	Load/Remove Paper	Paper Jam	Error
Print Diag Inst	●	●	●	●	●	○
Prt Quality Pgs	●	○	○	○	○	○
Defaults = U.S.	○	●	○	○	○	○
U.S.	○	○	○	○	○	○
Non-U.S.	○	○	○	○	○	○
Edge to Edge = Off	○	○	○	○	○	○
Off	○	○	○	○	○	○
On	○	○	○	○	○	○
Cont Prt Simplex Tray 1	○	○	○	○	○	○
Cont Prt Duplex Tray 1	○	○	○	○	○	○
Cont Prt Simplex Tray 2	○	○	○	○	○	○
Cont Prt Duplex Tray 2	○	○	○	○	○	○
Print History	○	○	○	○	○	○
Configuration ID = 51C00B1E	○	○	○	○	○	○
Printer Alignment	○	○	○	○	○	○
Par S Strobe Adj = 0	●	●	●	●	●	○
-4	○	○	○	○	○	○
-3	○	○	○	○	○	○
-2	○	○	○	○	○	○
-1	○	○	○	○	○	○
0	○	○	○	○	○	○
1	○	○	○	○	○	○
History	○	○	○	○	○	○
Mark History = Do Not Mark	○	○	○	○	○	○
Mark	○	○	○	○	○	○
Do Not Mark	○	○	○	○	○	○
History Mode = Modified	○	○	○	○	○	○
Modified	○	○	○	○	○	○
Every Time	○	○	○	○	○	○
Dump NVRAM	○	○	○	○	○	○
Reinit NVRAM	○	○	○	○	○	○
Optra Forms Mode = Off	○	○	○	○	○	○
On	○	○	○	○	○	○
Off	○	○	○	○	○	○
Meditech Mode = No	○	○	○	○	○	○
Yes	○	○	○	○	○	○
No	○	○	○	○	○	○



## Configuration menu selections

To enter Configuration menu:

1. Turn off the printer.
2. Open the front access cover.
3. Turn on the printer while pressing and holding .
4. Close the cover once the  light displays.

Print menus by pressing and holding  until the lights flash.


## Utilities

Use the Utilities menu to troubleshoot printer problems.

Setting	Use setting to	Values
Reset Factory Defaults	Return the printer settings to factory default values. Sometimes resetting the printer to the original settings solves formatting problems. All menu items are reset to the factory default values except: <ul style="list-style-type: none"> <li>• All settings in the Parallel menu, Network menu, and USB menu.</li> <li>• All downloaded resources (fonts, macros, and symbol sets) in printer memory (RAM) are deleted.</li> </ul> Resources in flash memory are unaffected.	
Hex Trace	Help isolate printing problems when unexpected characters print or characters are missing.  Hex Trace helps determine if there is a problem with the language interpreter or the cable by providing information about what the printer is receiving.  To exit Hex Trace, turn off the printer.	Off (default) On
Print Quality Test Pages	Help isolate print quality problems, such as streaking. Four pages print to help evaluate print quality: <ul style="list-style-type: none"> <li>• A text page with printer information, cartridge information, current margin settings, and a graphic.</li> <li>• One page is gray with graphics, one is black, and one is blank.</li> </ul>	
Reset Photo-conductor Counter	Return the photoconductor counter to zero.  The replace photoconductor message should be cleared <i>only</i> when the photoconductor kit has been replaced.	

## Setup

Use the Setup menu to configure how the printer formats the end of a line depending on the computer system being used.

Menu item	Use setting to	Values
Demo Mode	Put printer into demo mode where internal sheets print with each press of  . To deactivate, turn the printer off, and re-enter configuration group. Set to deactivate.	Deactivate (default) Activate
Auto CR After LF	Specify whether the printer automatically performs a carriage return after a line feed control command.	Off (default) On
Auto LF after CR	Specify whether the printer automatically performs a line feed after a carriage return control command.	Off (default) On
Energy Conserve	When setting is on, the user cannot disable Power Saver. When off, Power Saver will be off.	Off On (default)

## Parallel

Use the Parallel menu to change printer settings on jobs sent through a parallel port.

Menu item	Use setting to	Values
NPA Mode	Send print jobs to the printer and query printer status information simultaneously.	Off On Auto (default)
Protocol	Receive information at a much higher transmission rate if the printer is set to Fastbytes (if the computer supports Fastbytes) or receive information at a normal transmission rate if the printer is set to Standard.	Standard Fastbytes (default)
Parallel Mode 2	Determine whether the parallel port data is sampled on the leading (On) or trailing (Off) edge of strobe.	Off On (default)
MAC Binary PS	Configure the printer to process Macintosh binary PostScript print jobs.	Off—The printer filters PostScript print jobs using Standard protocol. On—The printer processes raw binary PostScript print jobs from computers using the Macintosh operating system. This setting often causes Windows print jobs to fail. Auto (default)—The printer processes print jobs from computers using either Windows or Macintosh operating systems.

**USB**

Use the USB menu to change printer settings on jobs sent through a USB port.

Menu item	Use setting to	Values
NPA Mode	Send print jobs to the printer and query printer status information simultaneously.	Off On Auto (default)
MAC Binary PS	Configure the printer to process Macintosh binary PostScript print jobs.	Off—The printer filters PostScript print jobs using Standard protocol.  On—The printer processes raw binary PostScript print jobs from computers using the Macintosh operating system. This setting often causes Windows print jobs to fail.  Auto (default)—The printer processes print jobs from computers using either Windows or Macintosh operating systems.

## Network

Use the network menu to change printer settings on jobs sent through a network port (either standard network or network opt <x>).

Menu item	Use setting to	Values
NPA Mode	Send print jobs to the printer and query printer status information simultaneously.	Off Auto (default)
MAC Binary PS	Configure the printer to process Macintosh binary PostScript print jobs.	Off—The printer filters PostScript print jobs using Standard protocol.  On—The printer processes raw binary PostScript print jobs from computers using the Macintosh operating system. This setting often causes Windows print jobs to fail.  Auto (default)—The printer processes print jobs from computers using either Windows or Macintosh operating systems.
Set Card Speed	Automatically detect the connection speed of the network. This setting can be disabled to set the speed manually.	Auto (default)—the printer detects current network speed.  10Mbps, half duplex—forces the printer to try to connect to the network only at 10Mbps, half duplex.  10Mbps, full duplex—forces the printer to try to connect to the network only at 10Mbps, full duplex.  100Mbps, half duplex—forces the printer to try to connect to the network only at 100Mbps, half duplex.  100Mbps, full duplex—forces the printer to try to connect to the network only at 100Mbps, full duplex.

## Diagnostics mode selections

To enter Diagnostics mode, turn off the printer, open the front access cover, press and hold (X) while turning on the printer, and close the cover when the ! light displays.


Print the menu page by pressing and holding (▶) until the lights flash. Follow the instructions on the menu page to access the menu items shown in the table below.

Menu item	Use setting to	Value
Prt Quality Pgs	Print test pages by pressing and holding (▶) until the lights flash. Help isolate print quality problems, such as streaking. Four pages print: A text page with printer information, cartridge information, current margin settings, and a graphic. Three pages all gray, all black, and the last one blank. Cartridge lockout function is disabled.	None
Edge to Edge	Allow a shift of all four margins (top, bottom, right, and left) to the physical edge of the page (printable area of supported paper). Setting is ignored by PPDS interpreter.	Off (default) On
Defaults	Change sizes and designations to metric.	U.S. (default) Non-U.S.
Cont Prt Simplex Tray 1	Continuously print pages containing cross lines, printer information, and margin settings. Press and hold (▶) until the lights flash to begin. Press (X) to stop.	None
Cont Prt Duplex Tray 1	Continuously print pages containing cross lines, printer information, and margin settings. Press and hold (▶) until the lights flash to begin. Press (X) to stop.	None
Cont Prt Simplex Tray 2	Continuously print pages containing cross lines, printer information, and margin settings. Press and hold (▶) until the lights flash to begin. Press (X) to stop.	None
Cont Prt Duplex Tray 2	Continuously print pages containing cross lines, printer information, and margin settings. Press and hold (▶) until the lights flash to begin. Press (X) to stop.	None
Print History	Print history of errors. Press and hold (▶) until the lights flash to print.	None
Configuration ID	Allow the printer ID to match the label ID after the controller card is replaced.	000101 (default) 000189
Printer alignment	A step-by-step process to align a new printhead. See <b>“Printhead assembly electronic adjustment” on page 3-9</b> for more information.	None


## Adjustment procedures


### Printhead assembly electronic adjustment





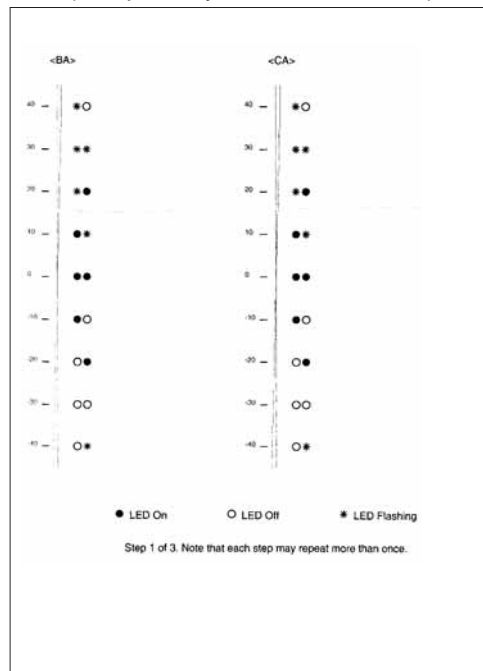

**Note:** Before aligning the printhead electronically, first align the printhead mechanically, if needed. See **“Printhead assembly mechanical adjustment” on page 3-13.**



1. Press and hold  until all of the lights cycle to print the menu sheet and Step 1 test page.







#### Step 1 printout (sample only; use actual sheet)




2. In column <BA> of Step 1 test page, look for the position where the vertical lines are the closest to each other. Press and release  to change to the pattern adjacent to the closest lines.

					
See note	See note	●			<BA>


3. Press and release  to move to the <CA> light sequences on the right side of the Step 1 test page.
4. Press and release  to change the light sequence for <CA> on the right side of the Step 1 test page.


					
See note	See note	●			<CA> ●







**Note:** Lights (on, off, or flashing) represent current settings that must be changed for the new printhead.

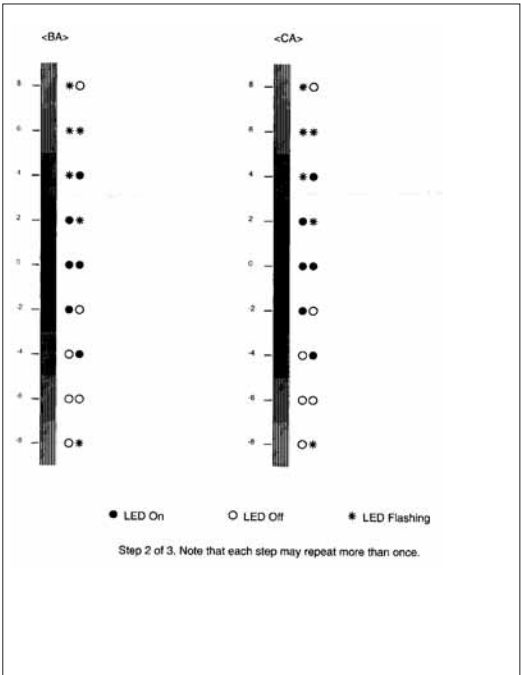

5. Press and hold  until all of the lights cycle to print Step 2 test page.







**Step 2 printout**  
(sample only; use actual sheet)




6. Press and release  to change the <BA> light sequence to the number beside the darkest portion of the vertical bar.

					
See note on page 3-9.	See note on page 3-9.	●	●		<BA>


7. Press and release  to move to the <CA> light sequences on the right side of Step 2 test page.  
8. Press and release  to change the <CA> light sequence to the number beside the darkest portion of the vertical bar.


					
See note on page 3-9.	See note on page 3-9.	●	●		<CA> ●







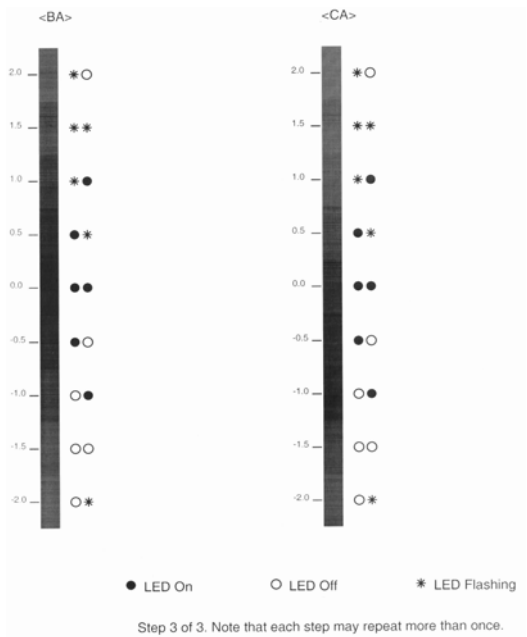



9. Press and hold  until all of the lights cycle to print Step 3 test page.







**Step 3 printout**  
(sample only; use actual sheet)




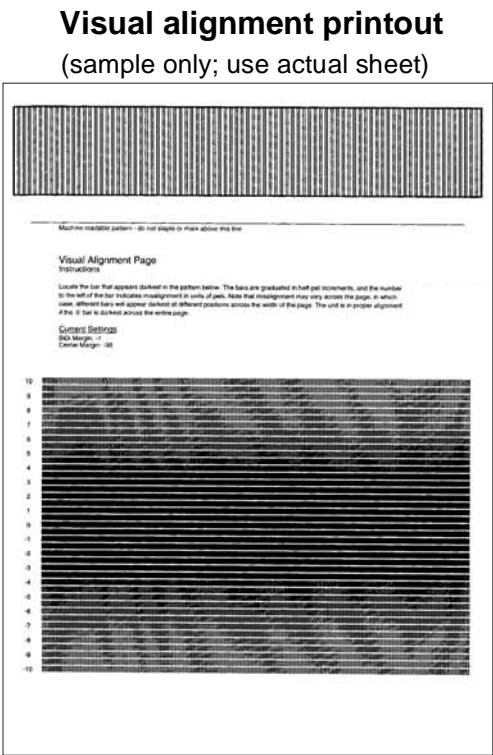
10. Press and release  to change the <BA> light sequence to the number beside the darkest portion of the vertical bar.








					
See note on page 3-9.	See note on page 3-9.	●	●	●	<BA>

11. Press and release  to move to the <CA> light sequences on the right side of the Step 3 test page.
12. Press and release  to change the <CA> light sequence to the number beside the darkest portion of the vertical bar.

					
See note on page 3-9.	See note on page 3-9.	●	●	●	<CA> ●

13. Press and hold  until all of the lights cycle to print Visual alignment page.



					
		See note 			


**Note:** The load/remove paper light will be displayed to indicate that the final level of the menu has been reached.

14. Verify that the overall darkest line across the page is “0.” If not, then run the alignment again.
15. Turn the printer off to exit the printer alignment menu.

## Printhead assembly mechanical adjustment

A printhead needs to be correctly positioned after it has been removed. Align it to the frame or use the same position as the removed printhead. An indicator is located at the front right-hand screw for reference.

**Note:** Skew is caused by a sheet being fed through the printer while misaligned. The entire image is rotated relative to the sheet edges. However, a mechanically misaligned printhead causes the horizontal lines to appear skewed while the vertical lines remain parallel to the vertical edges.



There are no adjustments for skew. Check the pick roll (paper pick assembly) for wear, the paper path for obstructions, the fuser for proper setting, and the tray paper guides for fit to the media.

### To adjust the printhead:

1. Enter the Diagnostics Menu. See **“Diagnostics mode selections” on page 3-8.**
2. Press and release (X) to go to Cont Prt Simplex Tray 1. (▼/⊙ is on.)
3. Press and hold ► to print the first Cont Prt Simplex Tray 1 test page. Press (X) immediately after the paper picks to avoid printing more pages.
4. Fold the printed test page on the left side so that a few millimeters of grid lines wrap around the outside of the fold. See photo below.
5. Fold a second vertical fold near the center so that the left side top edge aligns with the right side top edge.



6. If the grid lines of the right flap align below the corresponding lines on the left flap, adjust the printhead clockwise relative to the printer and recheck. (See the left side of the figure below.) If the grid lines of the left flap align below the corresponding lines of the right side, adjust the printhead counterclockwise. (See the right side of the figure below.)



7. After obtaining a properly adjusted image on the paper, tighten all three screws.

**Note:** The printhead **must** be aligned electronically. See **“Printhead assembly electronic adjustment”** on **page 3-9**.

---

## 4. Repair information

**Warning:** Read the following before handling electronic parts.

---

### Handling ESD-sensitive parts

Many electronic products use parts that are known to be sensitive to electrostatic discharge (ESD). To prevent damage to ESD-sensitive parts, follow the instructions below in addition to all the usual precautions, such as turning off power before removing logic cards:

- Keep the ESD-sensitive part in its original shipping container (a special “ESD bag”) until the part is ready to be installed into the printer.
- Make the least-possible body movements to prevent an increase of static electricity from clothing fibers, carpets, and furniture.
- Put the ESD wrist strap on your wrist. Connect the wrist band to the system ground point. This discharges any static electricity in your body to the printer.
- Hold the ESD-sensitive part by its edge connector shroud (cover); do not touch its pins. If a pluggable module is being removed, use the correct tool.
- Do not place the ESD-sensitive part on the MFP cover or on a metal table; if the ESD-sensitive part needs to be put down for any reason, first put it into its special bag.
- Machine covers and metal tables are electrical grounds. They increase the risk of damage because they make a discharge path from your body through the ESD-sensitive part. (Large metal objects can be discharge paths without being grounded.)
- Prevent ESD-sensitive parts from being accidentally touched by other personnel. Install machine covers when the machine is not being worked on, and do not put unprotected ESD-sensitive parts on a table.
- If possible, keep all ESD-sensitive parts in a grounded metal cabinet (case).
- Be extra careful in working with ESD-sensitive parts when cold-weather heating is used, because low humidity increases static electricity.

---


### Removal procedures

**Note:**

1. Remove the toner cartridge and media tray before removing other printer parts. The toner cartridge should be protected from light while out of the printer.
2. We recommend disconnecting all external cables from the printer to prevent damage during service.
3. Unless otherwise stated, reinstall the parts in reverse order of removal.
4. When reinstalling a part held with several screws, start all screws before final tightening.

## Front access cover removal

1. Remove Tray 1.
2. Open the front access cover.
3. Open the rear door and the right side cover.
4. Loosen the four screws, and remove the controller card cover.
5. Disconnect the operator panel cable (A) from J3 on the controller card.

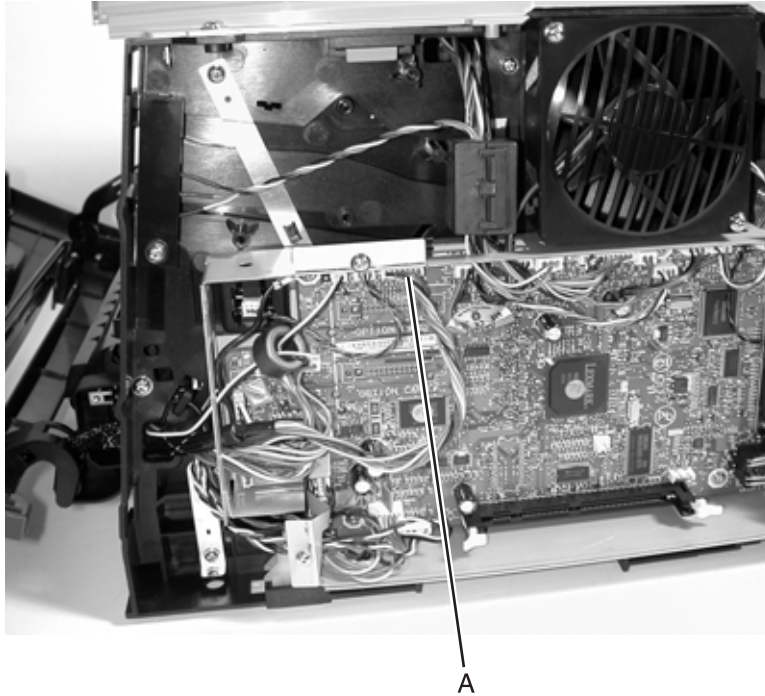


6. Extract the cable, and unhook the access cover by pressing the right hinge to the right until it can be lifted up and away from its pivot. Relax the hinge above the pivot.
7. In the same manner, move the left hinge from its pivot point.



8. Tilt the front cover down, and disconnect it on the left side from the link.


**Warning:** Make sure that the link is not bent or pulled out farther than normal. Otherwise, the toner cartridge coupler may become dislodged.

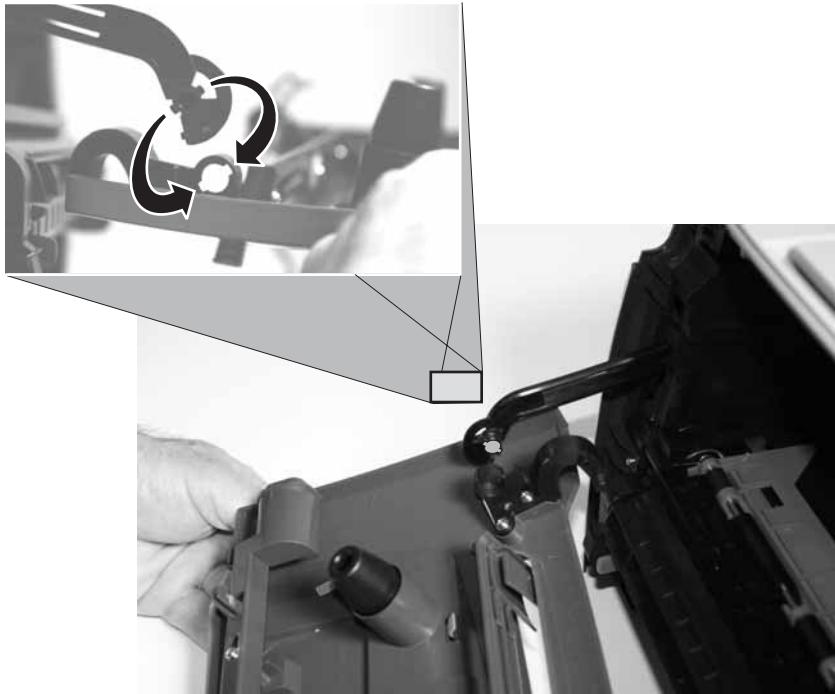

9. Remove the front access cover.

## Left side cover removal

1. Remove Tray 1.
2. Open the front access cover.
3. Open the rear door.
4. Remove the screw (A).
5. Unlatch the cover from the latches (B).

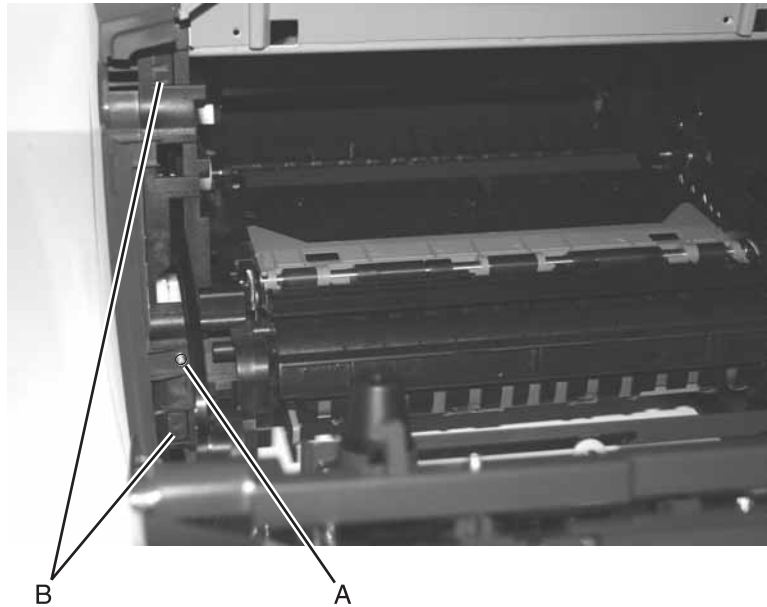

6. Position the printer with the left rear corner hanging over the edge of the table.
7. Swing the cover open.



8. Lift the top rear of the cover over the pivot point, and drop the cover away from the printer.



## Right side cover removal

1. Remove Tray 1.
2. Open the front access cover.
3. Open the rear door.
4. Release the latches (A), and swing the cover open.



A


5. Position the printer with the right rear corner hanging over the edge of the table.



6. Lift the top rear of the cover over the pivot point, and drop the cover away from the printer.

## Rear cover removal

1. Remove the right side cover. See **“Right side cover removal”** on page 4-5.
2. Remove the left side cover. See **“Left side cover removal”** on page 4-4.
3. Remove the two screws (A).

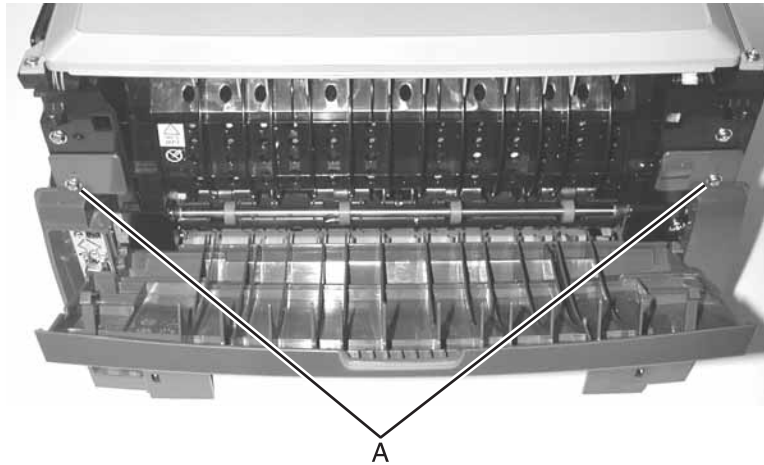


4. Open the rear cover.
5. Lift the rear cover, unhooking it from the frame at the bottom, and remove.


**Note:** In re-installation, check to make sure that the fuser ground cable is routed out of the way and is not pinched or damaged.

## Top cover removal

1. Remove the right side cover. See **“Right side cover removal”** on page 4-5.
2. Remove the left side cover. See **“Left side cover removal”** on page 4-4.
3. Open the rear door.
4. Remove the two screws (A) from the two front corners on the top cover, the two screws (B) from the two rear corners on the top cover, and the screw (C) on the left side.

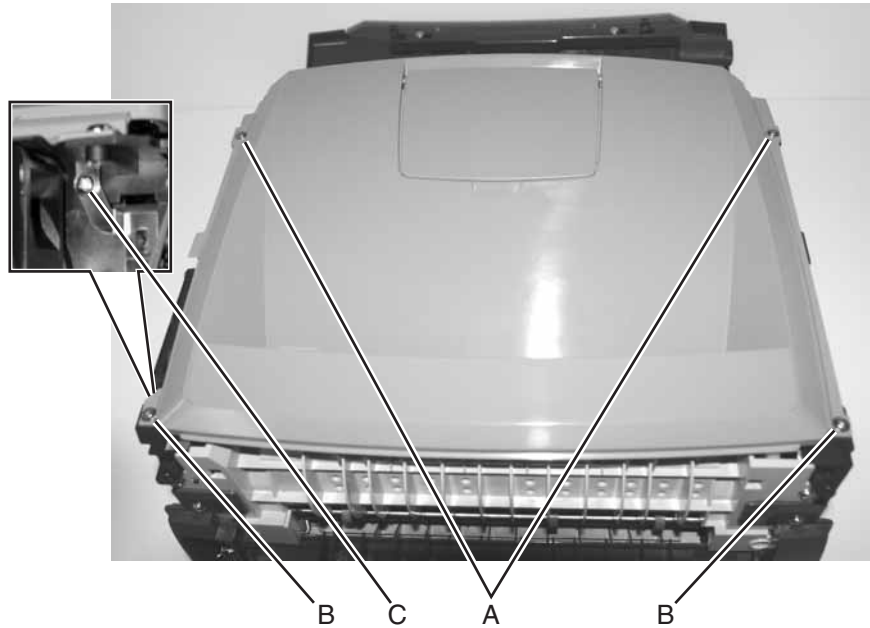


5. Open the front cover.
6. Remove the two screws (D).

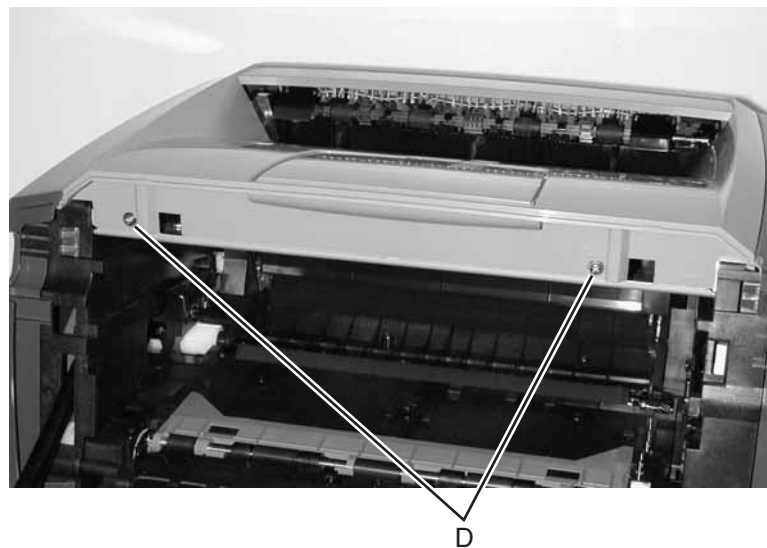


7. Remove the controller card cover.

8. Disconnect the cable (E) of the narrow media sensor from J10 on the controller card.

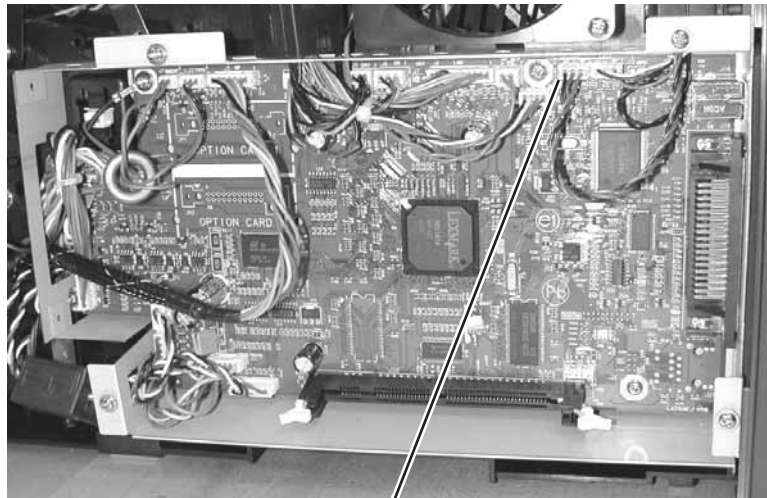

E

9. Free the cable while noting which top frame opening it goes through.
10. Release the latches (F) on both sides to unhook the top cover.

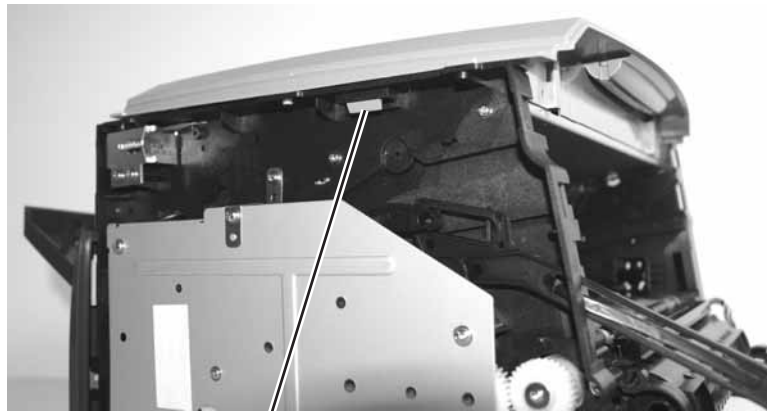

F

11. Lift and remove the top cover.

**Installation note:**


- Be sure to re-route the cable back through the same hole.
- Be sure that the ground strap aligns at screw (C).
- Verify the proper alignment of the top cover with the paper exit guide along the mating edges at the rear of the exit tray.
- Verify that the rollers in the top cover contact the exit guide rollers at the top rear. There are arrows under the top cover to verify the location of the rollers.

## Auto comp removal

1. Remove the duplex. See **"Duplex removal"** on page 4-18.
2. Remove the auto comp clutch. See **"Auto comp clutch removal"** on page 4-10.
3. Use a spring hook or a small screwdriver to rotate the latch toward the bottom of the printer until it is pointing downward.



4. Lay the printer on its top. Be sure to protect it from marring.
5. Raise the auto comp, and unhook the counter balance spring (A).

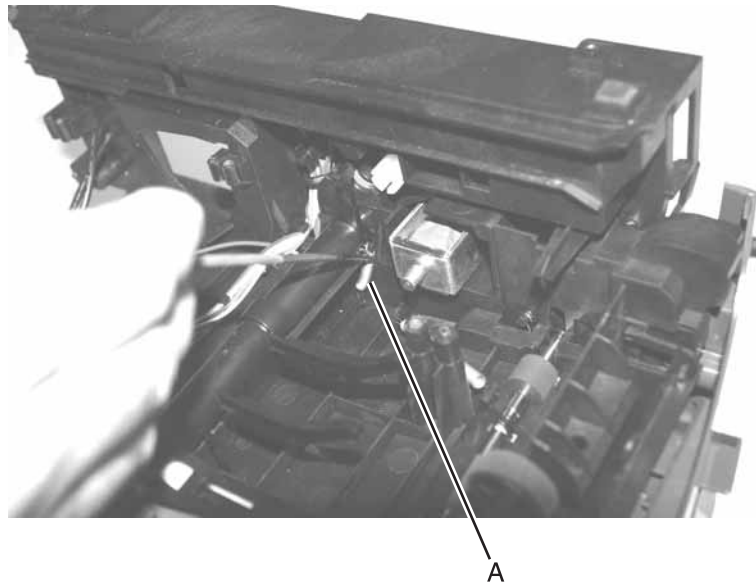


6. Rotate the arm, and pull to remove the auto comp.



### Auto comp clutch removal

1. Remove the left side cover. See **“Left side cover removal” on page 4-4.**
2. Remove the main motor drive. See **“Main motor drive removal” on page 4-28.**
3. Remove the screws (A).

**Note:** Resistance to loosening the screw may have to be applied to the shaft. Use a finger or small screwdriver against the coupler behind the clutch.

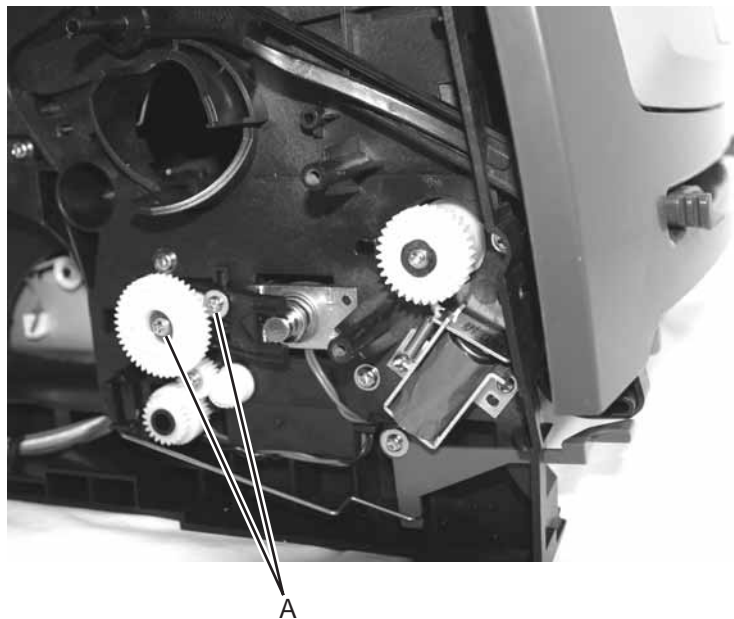


4. Remove the auto comp clutch.



## Auto comp drive shaft assembly removal

1. Remove the auto comp clutch. See **"Auto comp clutch removal"** on page 4-10.
2. Use a spring hook or a small screwdriver to dislodge the arm of the shaft bushing, and rotate the arm counterclockwise as far as it will go.

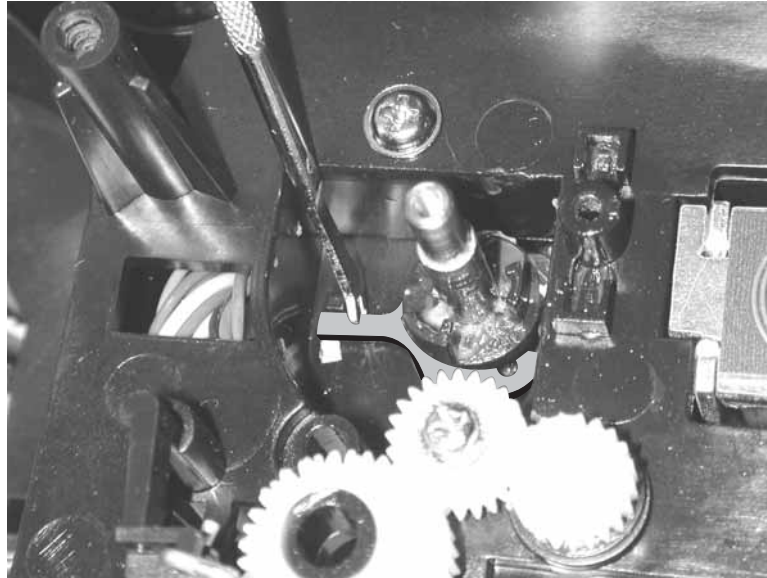


3. With the bushing aligned with the frame opening for clearance, unsnap the shaft from the ACM.
4. Remove the auto comp drive shaft assembly.
5. Use a screwdriver to align the ACM with the shaft bearing to help in installation.




## Bezel removal

1. Open the front access cover.
2. Remove the two screws (A).

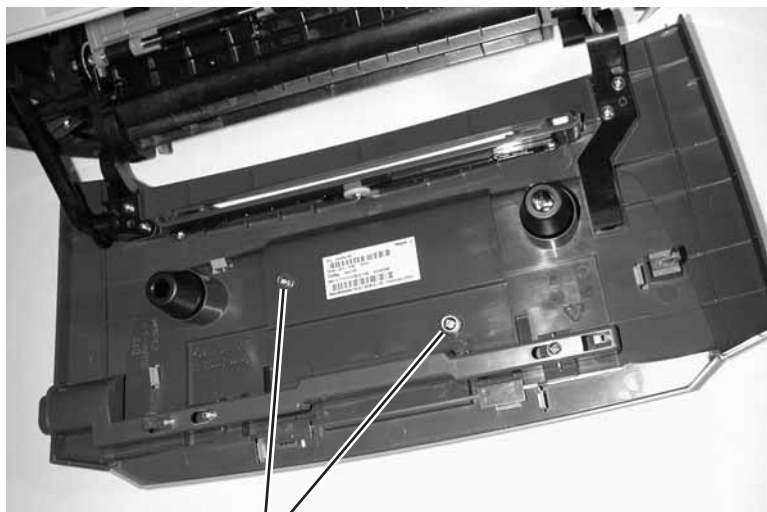

A

3. Lift the lower edge of the shield, slide it to the right, and remove.
4. Release the four inner latches (B).

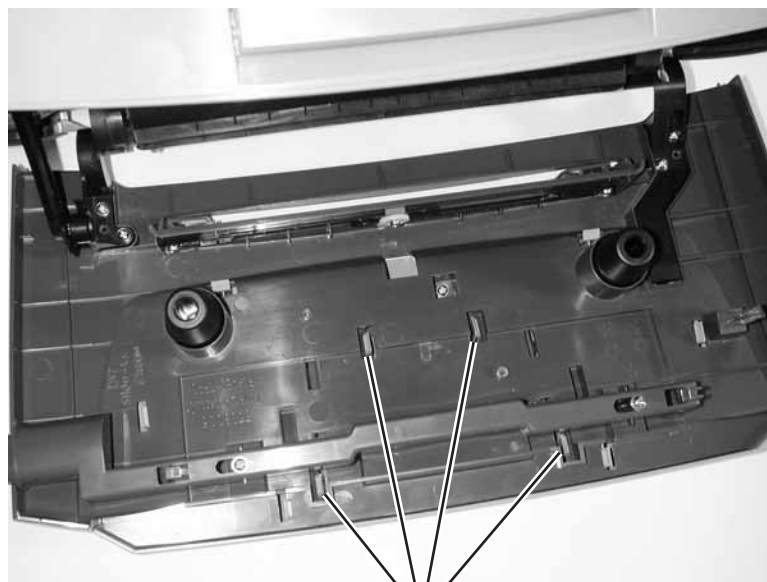

B

5. Remove the bezel and lens while the door remains open.



## Controller card removal


### Warning:

- Always touch a ground before touching the card.
- Handle the card carefully by the edges.
- Never replace the operator panel and controller card at the same time without a successful POR in between.

1. Remove the right side cover. See **“Right side cover removal”** on page 4-5.
2. Remove the controller card cover.
3. Disconnect all the cables from the controller card, and remove cables from the shield housing.


**Warning:** Do *not* replace the controller card and the operator panel at the same time. Each card contains the printer settings. When either of these cards is new, it obtains its settings from the other card. Critical factory settings are lost when both are new and replaced at the same time.

4. Remove the four screws (A) that are securing the controller card.

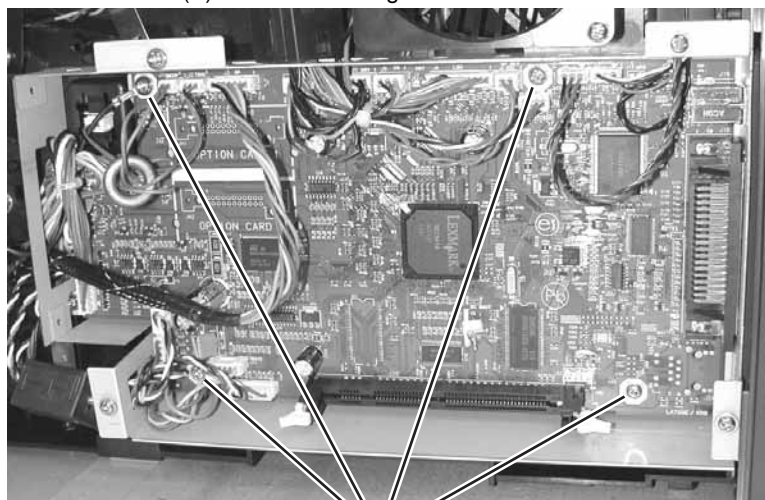

A

5. Remove the three screws (B) securing the USB port and the parallel ports.

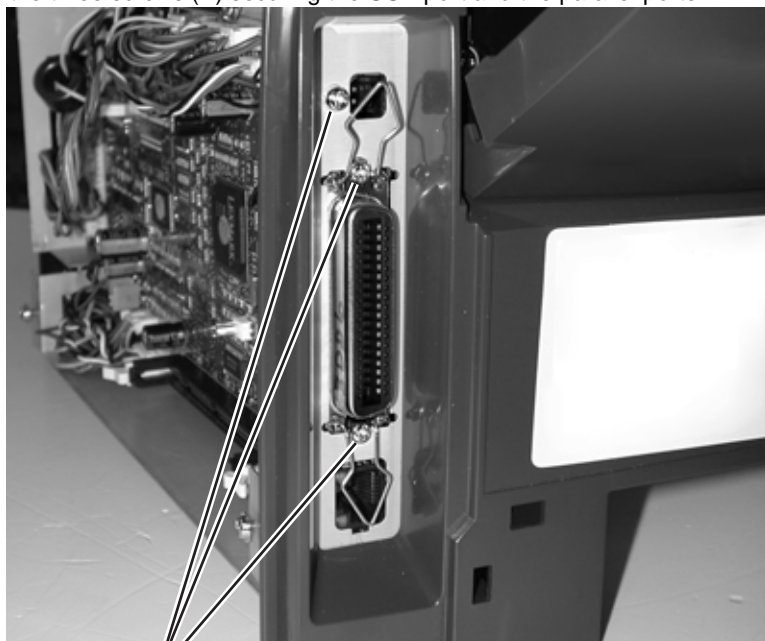

- B
6. Lift and remove the card.

**Re-installation note:** When replacing the controller card, make sure to route all of the cables through the correct shield opening. Make sure that the ground wire that is being held by the front, upper screw is in the correct location before installing.

## Cover open sensor removal


1. Remove Tray 1.
2. Open the front cover.
3. Open the right side cover. See steps 1 and 2 of **“Right side cover removal”** on page 4-5.
4. Remove the controller card cover.
5. Loosen the one screw (A) from the shield that protects the sensor.



6. Disconnect the cable from J6 on the controller card.

**Note:** The cable has a toroid. Be sure to remove the toroid before removing the cable.

7. Use a small Phillips screwdriver to remove the screw (B) holding the sensor.

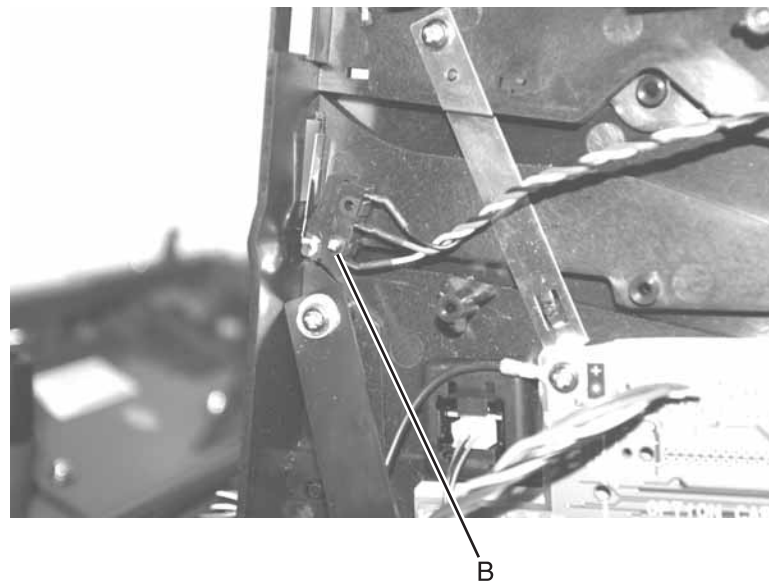

8. Remove the sensor.

### Reinstallation note:


- Be sure to re-route the cable back through its retainer.
- Be sure to place the toroid back over the cable.

## Developer drive coupling assembly removal


1. Remove the left side cover. See **“Left side cover removal”** on page 4-4.
2. Place the machine on its right side.

**Note:** Be sure to protect the machine from marring.

3. Remove the six screws (A), the machine screw (B), and the ground cable screw (C).

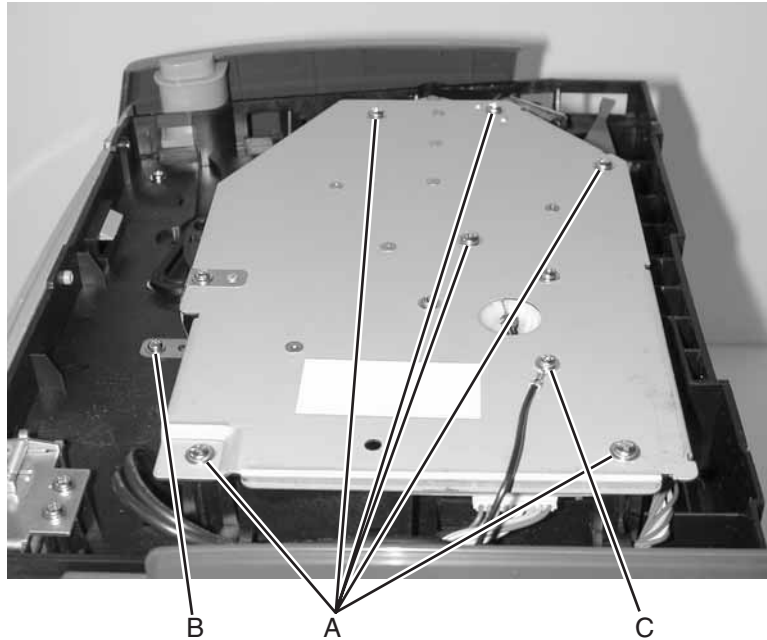


4. Lift the main motor drive, and disconnect the motor cable (D).

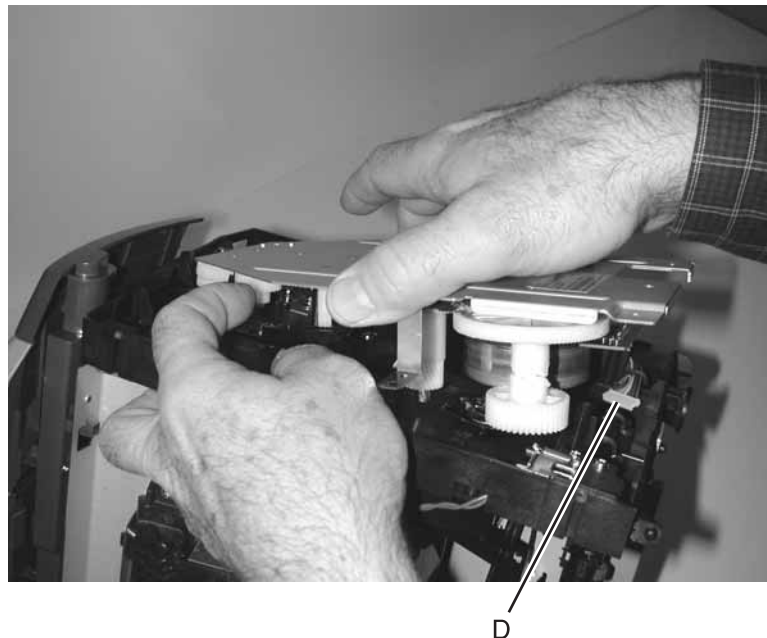

5. Remove the coupling spring (E).




6. Remove the developer drive coupling (F).

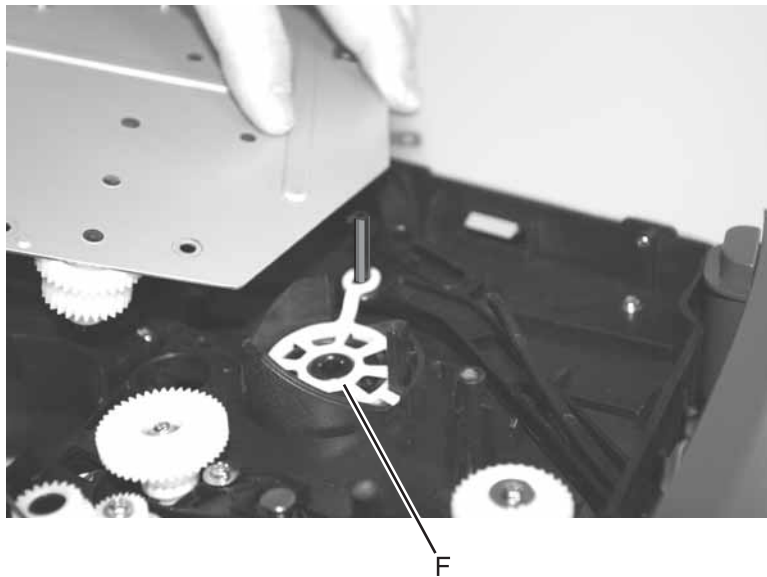

## Duplex removal


1. Remove the right side cover. See **"Right side cover removal"** on page 4-5.
2. Remove the left side cover. See **"Left side cover removal"** on page 4-4.
3. Remove the top cover. See **"Top cover removal"** on page 4-7.
4. Remove the controller card. See **"Controller card removal"** on page 4-13.
5. Remove the LVPS/HVPS card assembly. See **"LVPS/HVPS card assembly removal"** on page 4-26.
6. Unhook the media level indicator. See **"Media level indicator removal"** on page 4-33.
7. Remove the top LVPS/HVPS shield:
  - a. Remove the screw (A) and the screw (B) at the controller shield.
  - b. Remove the screw (C) opposite from screw (B) on the other side of the printer.

**Note:** The ground cable is attached to screw (C). When re-installing, be sure to reconnect the ground cable.

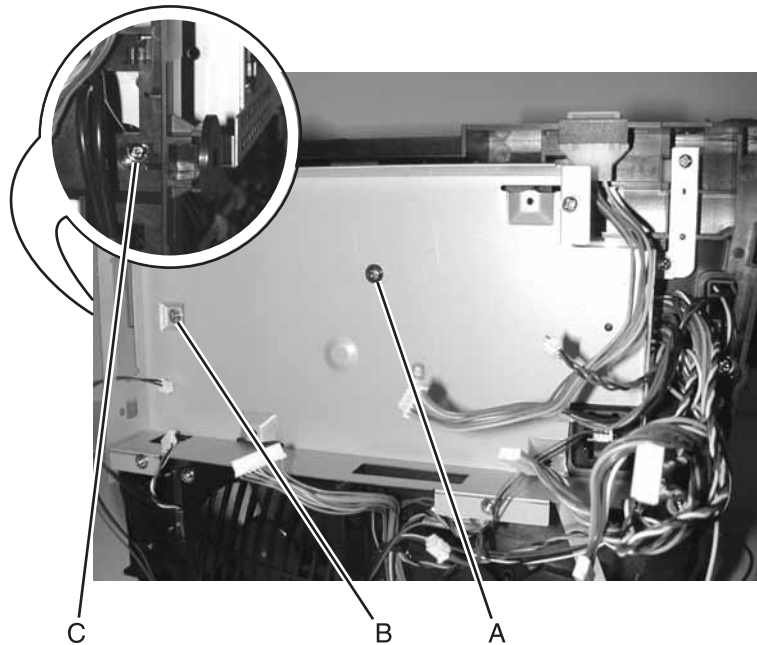

8. Remove the media level indicator. See **"Media level indicator removal"** on page 4-33.

9. Remove the six screws (D).

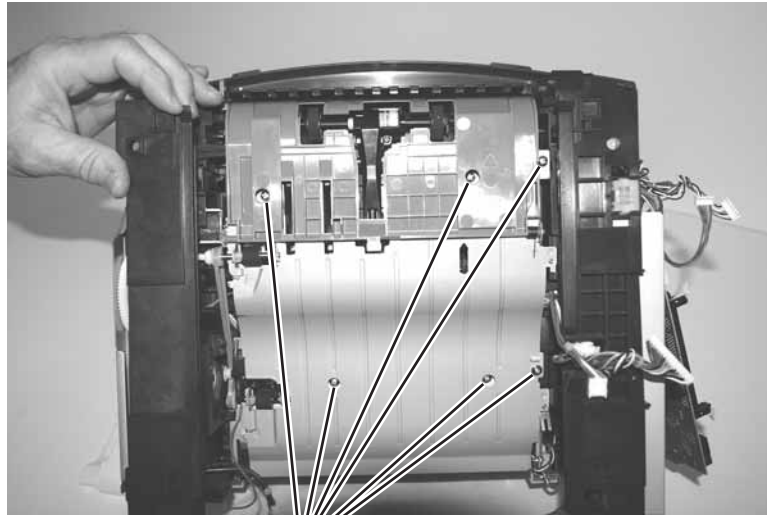

D

10. Lift the right side (opposite the coupler) and remove the duplex.

**Note:** At re-installation, before tightening the screws, locate the duplex unit against the left side frame. (Left side relative to the picture above.)




## Duplex gear drive

1. Remove the main motor drive. See **“Main motor drive removal”** on page 4-28.
2. Remove the duplex. See **“Duplex removal”** on page 4-18.
3. Remove the duplex coupling and gears (A) (the screw and plastic retainer).



A

4. Remove the duplex coupling (B) and mating link.

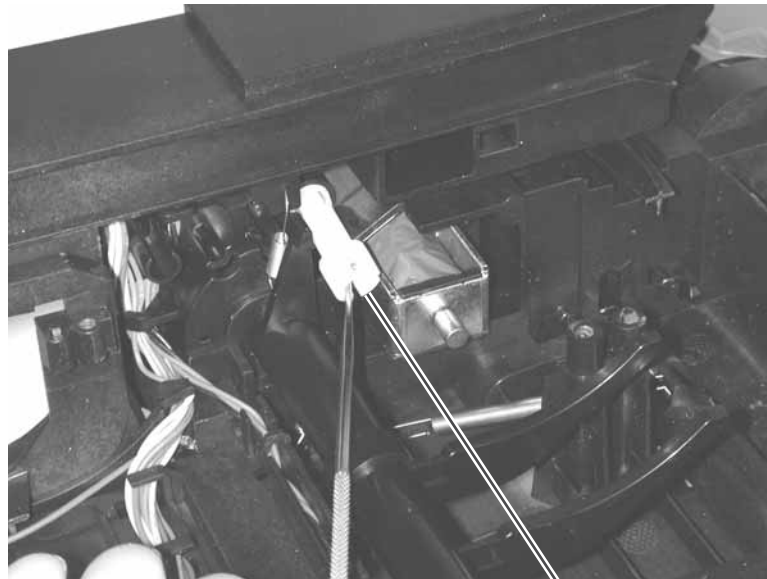


B

**Note:** The link (not shown) that connects the duplex and duplex coupling is part of this FRU as well as the duplex FRU.



## Fan removal

1. Open the right side cover. See steps 2 through 4 of **“Right side cover removal”** on page 4-5.
2. Remove the two screws (A) holding the fan to the side frame.

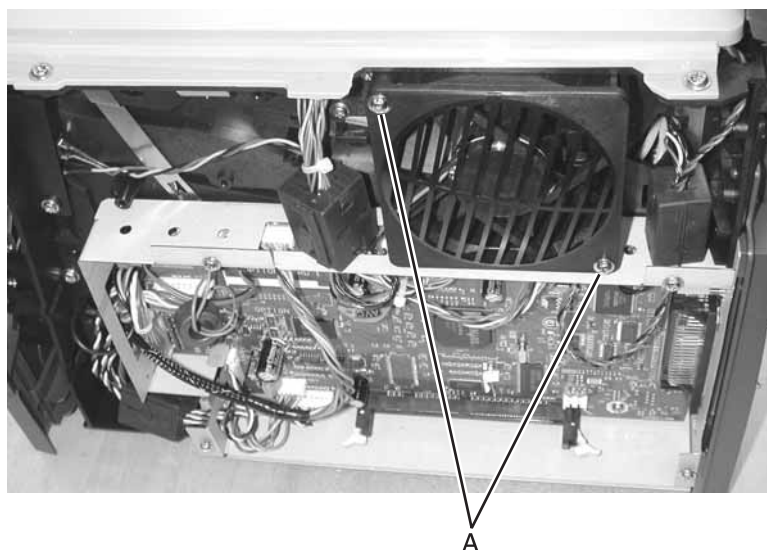


3. Unplug the cable from J4 on the controller card.

**Note:** Be sure to remove the toroid before removing the cables. When re-installing, be sure to place the toroid back over the same cables.

4. Remove the cable from its retainer.
5. Remove the fan.

## Flag removal (top cover right)

1. Remove the top cover. See **“Top cover removal”** on page 4-7.
2. Turn the top cover upside down.
3. While lifting the flag with your thumb to align the shaft flats with the holder, use the spring hook to slide the flag out of place, and remove.

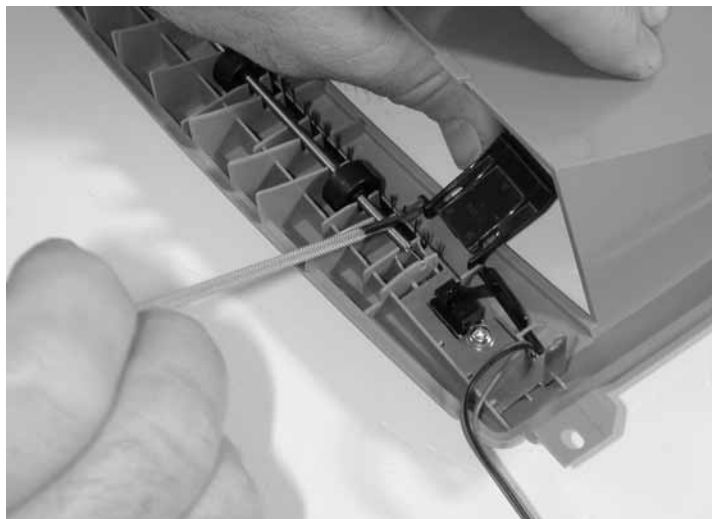


**Note:** The left flag was found to be not needed and has been removed from the FRU list.

## Fuser removal




1. Remove the left side cover. See **“Left side cover removal” on page 4-4.**
2. Remove the right side cover. See **“Right side cover removal” on page 4-5.**
3. Remove the rear cover. See **“Rear cover removal” on page 4-6.**
4. Loosen the top cover by removing the one rear screw above the reverse solenoid. Release the side latches, and lift the rear of the top cover.
5. Remove the paper exit guide assembly. The gears of the exit guide must clear the fuser bracket without touching it. See **“Paper exit guide assembly removal” on page 4-37** for more information.
6. Remove the two screws (A) and the one machine screw (B) that secures the ground cable.

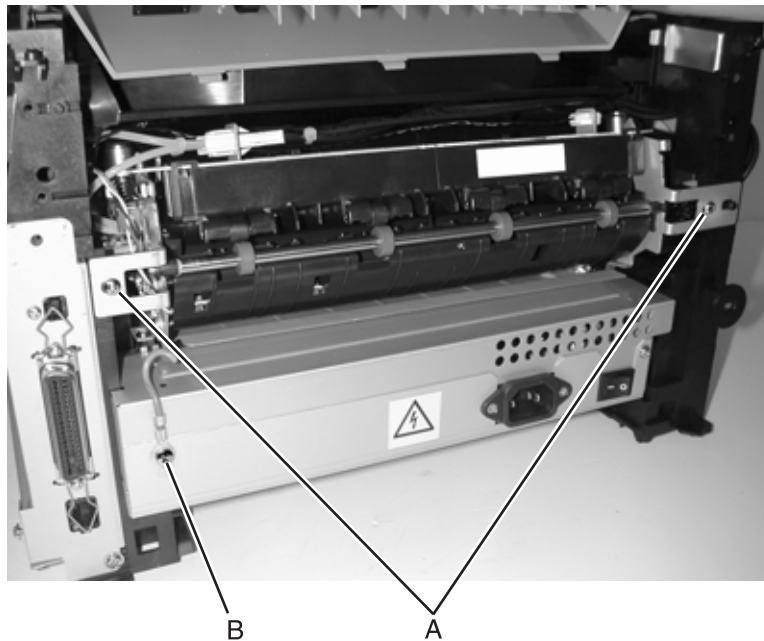


7. Disconnect the thermistor cable above the fuser.
8. Remove the controller card cover.
9. Disconnect the exit sensor cable from J11 on the controller card.
10. Disconnect the fuser power cable above the fuser.

11. Unlatch the fuser (see (A) and (B) in the second photo below), and remove.

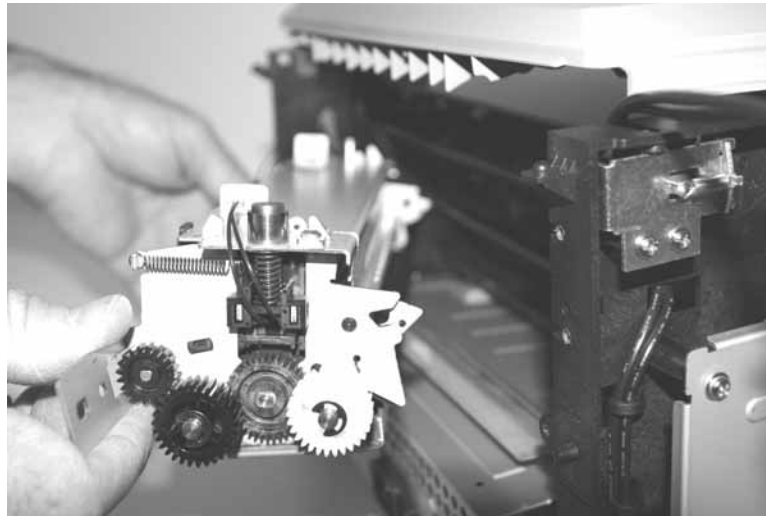

**Reinstallation note:**

- Be sure to reroute the cables back through their retainers.
- If the printer has been moved following the removal of the fuser, verify that the cross shaft behind the fuser is in place.
- Place the fuser into the opening, and push levers (A) to open the latches (B). Push the fuser into the final position on the release levers. Alternatively, the fuser may be tilted to drop the latches (B) below the shaft for the final few millimeters.
- Check to make sure that the ground cable is routed out of the way and will not be pinched or damaged by the rear cover.

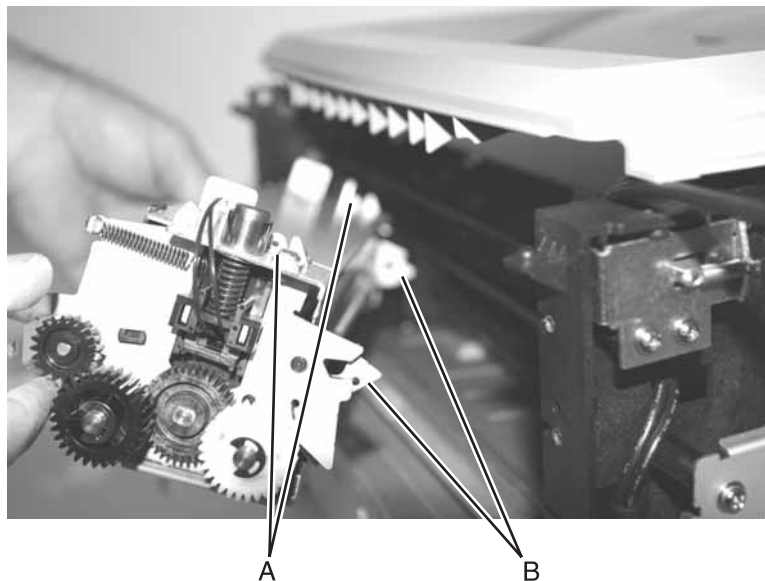


## Fuser power cable removal



1. Remove the paper exit guide assembly. See **"Paper exit guide assembly removal" on page 4-37.**
2. Remove the fuser. See **"Fuser removal" on page 4-22.**
3. Disconnect the power cable from the fuser, and pull the cable through the opening in the side frame.
4. Place the printer on its top with the back and bottom in view.


**Note:** Be careful not to mar the finish of the printer.

5. Remove the four screws (A), the machine screw (flange head) (B), and the machine screw (button head) (C).

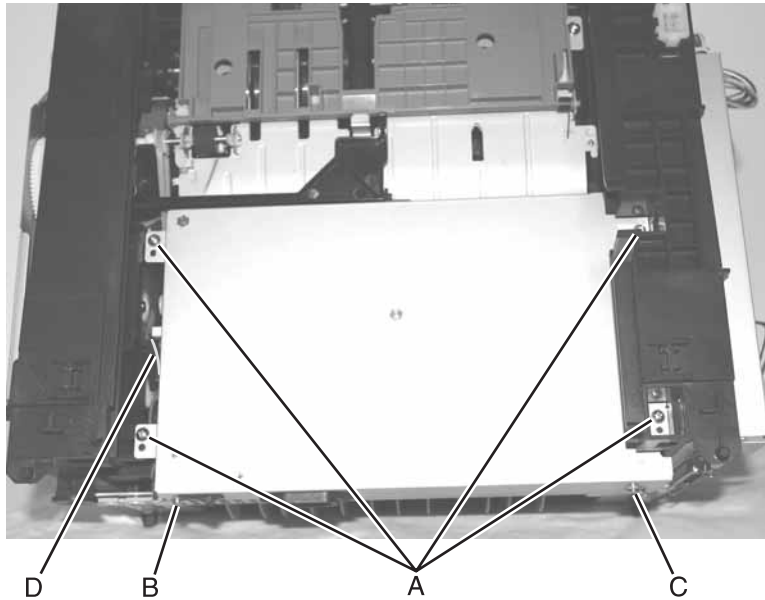

6. Use the hook end of a spring hook to disconnect the fuser power cable from the LVPS/HVPS side.

**Note:** The connector latch (D) is toward the side frame as shown.

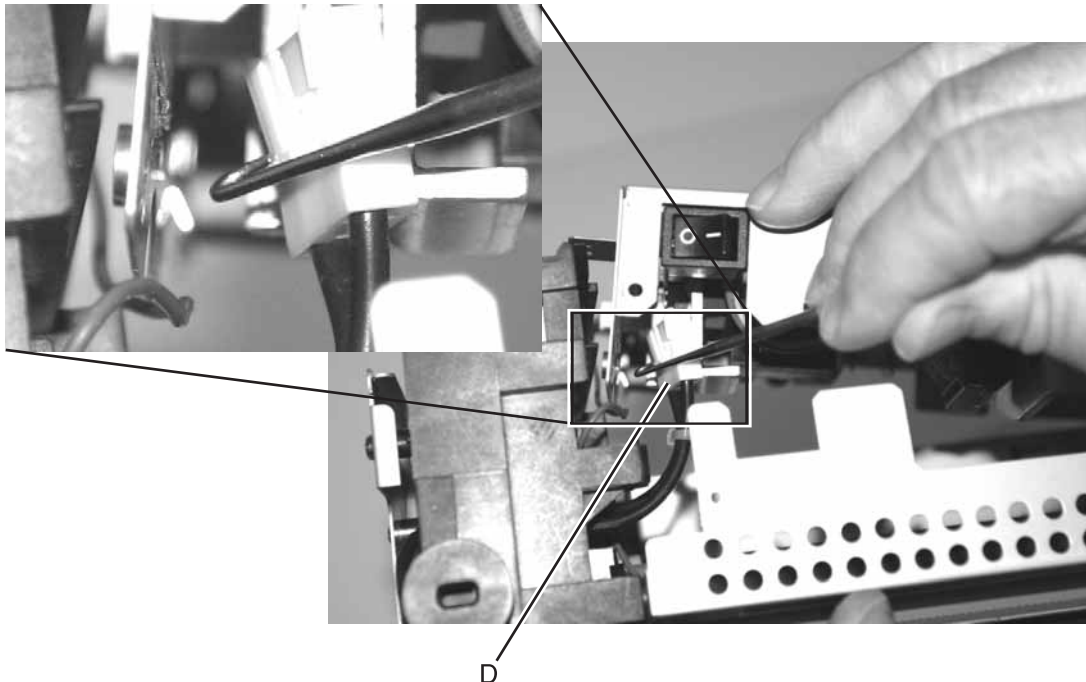

## Link developer drive and access door removal

1. Remove the main motor drive. See **“Main motor drive removal”** on page 4-28.
2. Remove the coupling assembly. See **“Developer drive coupling assembly removal”** on page 4-16.
3. Disconnect the front access door from its hinges. See **“Front access cover removal”** on page 4-2.

**Note:** The cover does not need to be electrically disconnected.

- 4.
5. Disconnect the link and door.



6. Remove the developer link.


## LVPS/HVPS card assembly removal




1. Remove the rear cover. See **“Rear cover removal”** on page 4-6.
2. Place the printer onto its top with the back and bottom in view.

**Note:** Be careful not to mar the finish of the printer.


3. Remove the four screws (A), the machine screw (B) and the machine screw (C).
4. Unhook the red cable (D) located in the left side frame.

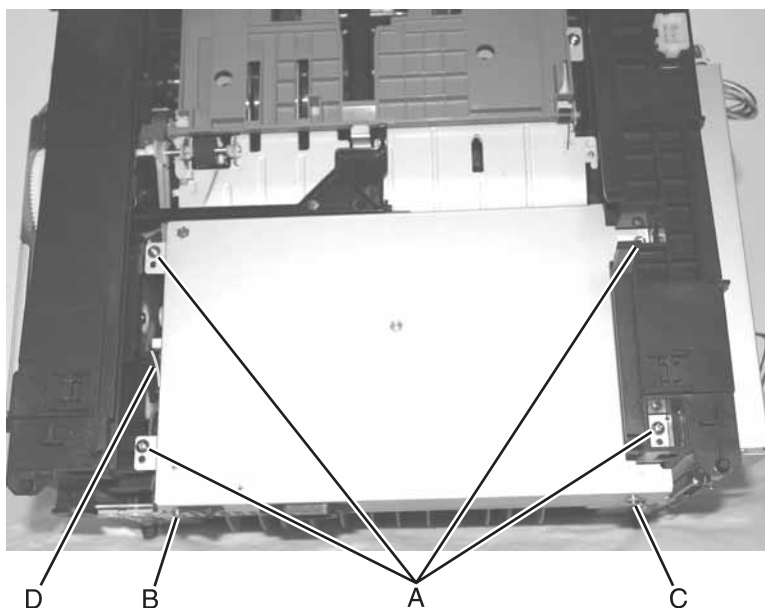

5. Lift the metal cover so the connecting cables (E) and (F) can be unplugged on the side shown.

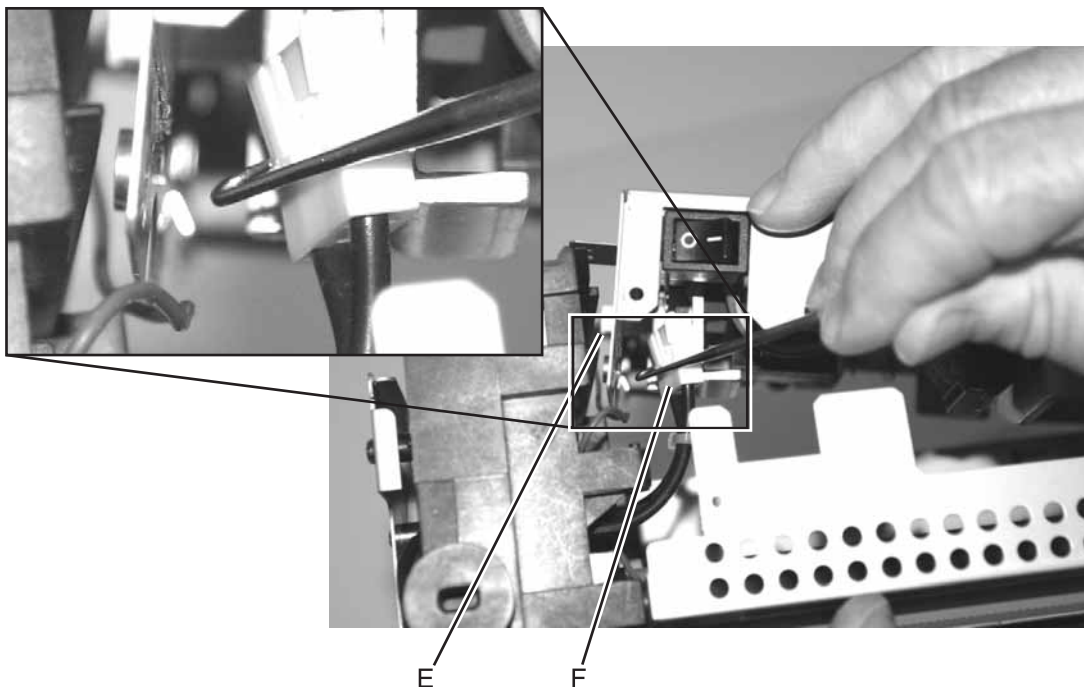

6. Rotate the assembly, and unplug the remaining cables.

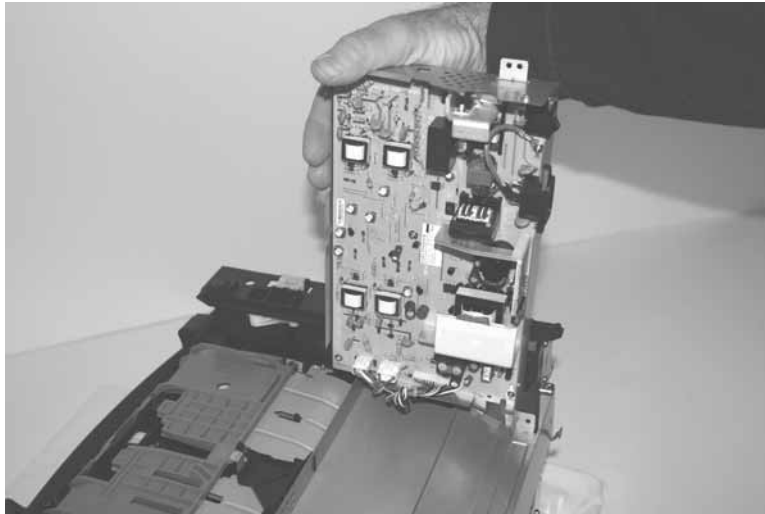

7. Remove the assembly.

**Re-installation note:**

When re-installing the LVPS/HVPS assembly:

- Be sure to locate the rear flange of the card bracket inside of the shield prior to rotating the card assembly into final position.



**CAUTION:** Make sure that the mylar card is located inside the overlapping flanges to avoid damage to the printer.

- It is easy for the cables to become pinched during re-installation. Make sure that the cables are free during re-installation.




## Main motor drive removal


1. Open the left side cover. See **“Left side cover removal” on page 4-4** for more information.
2. Tilt the printer onto its right side, and remove the six screws (A), the screw (B), and the ground cable screw (C).

**IMPORTANT:** The ground strap (held by screw B) is not included in the main motor drive FRU. Be sure to remove this strap, and install it in the new drive.

3. Lift the motor end, and disconnect the main motor cable (D).

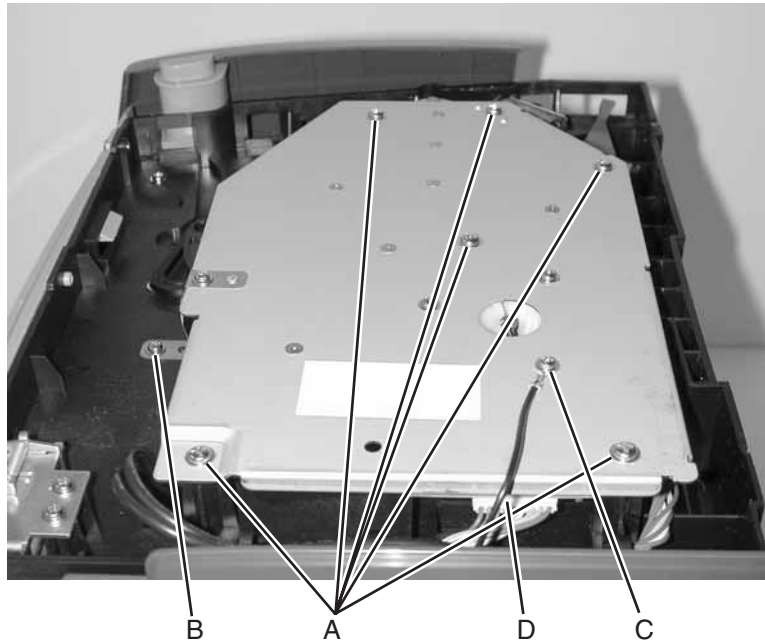

4. Lift the gear assembly, and remove the developer drive spring (E).

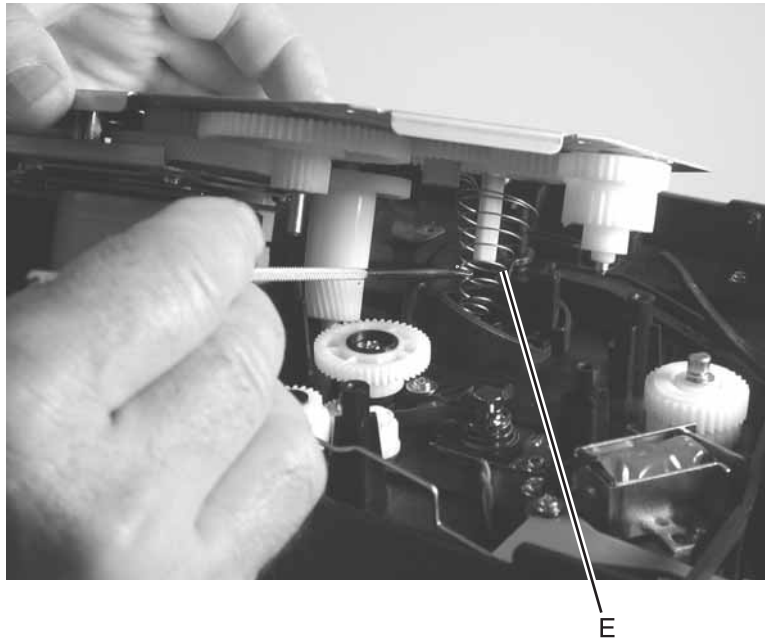



5. Rotate the motor drive counterclockwise until the two plastic links can be separated.




6. Remove the main motor drive.

## Manual feed sensor removal

1. Remove the right side cover. See **“Right side cover removal”** on page 4-5.
2. Remove the controller card cover by loosening the four screws and sliding the cover free from the screws.
3. Disconnect the sensor from J20 (MPF SNS) on the controller card, and free it back through the opening of the side frame.
4. Place the machine on its top.

**Note:** Be careful not to mar the finish of the printer.

5. Lift the door on the duplex and auto comp.
6. Remove the screw (A).

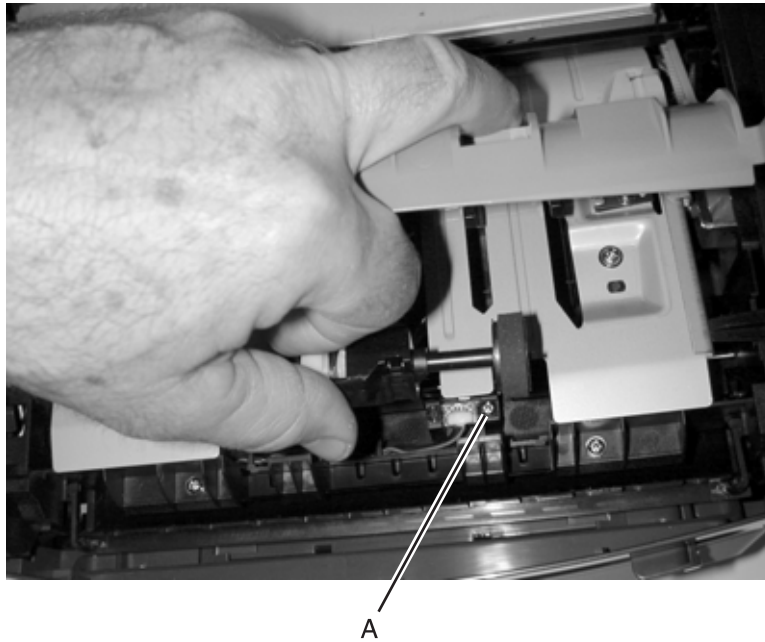


7. Free the cable from its retainer, and pull it through the opening toward the sensor mount.

### Re-installation note:

- Insert the hook end of the spring hook through the frame opening from the controller card side. Extend the hook until the sensor connector can be hooked.
- Hook the spring hook to the connector, and pull it through the opening.
- Place the sensor into position, and reconnect the cable on the controller card.
- Using the spring hook, be sure to reroute the cable through the three retainers between the sensor and side frame.

## Manual paper feed clutch


1. Open the left side cover. See **“Left side cover removal”** on page 4-4 for more information.
2. Tilt the printer onto its right side, and remove the six screws (A), the screw (B), and the ground cable screw (C).
3. Lift the motor end, and disconnect the main motor cable (D).

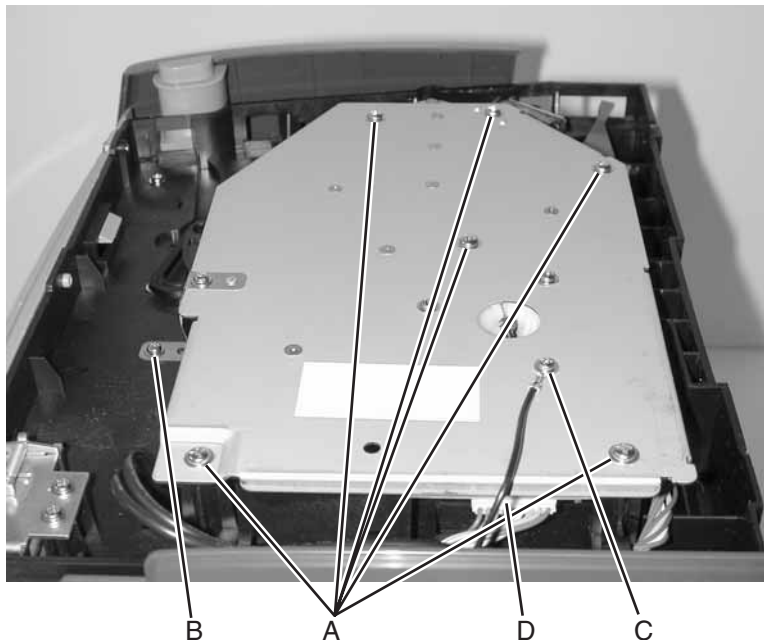

4. Lift the main motor drive enough to clear.

**Note:** The main motor drive does not have to be completely removed. See **“Main motor drive removal”** on page 4-28 for more information.


5. Use a thin screw driver to remove the clip (E).

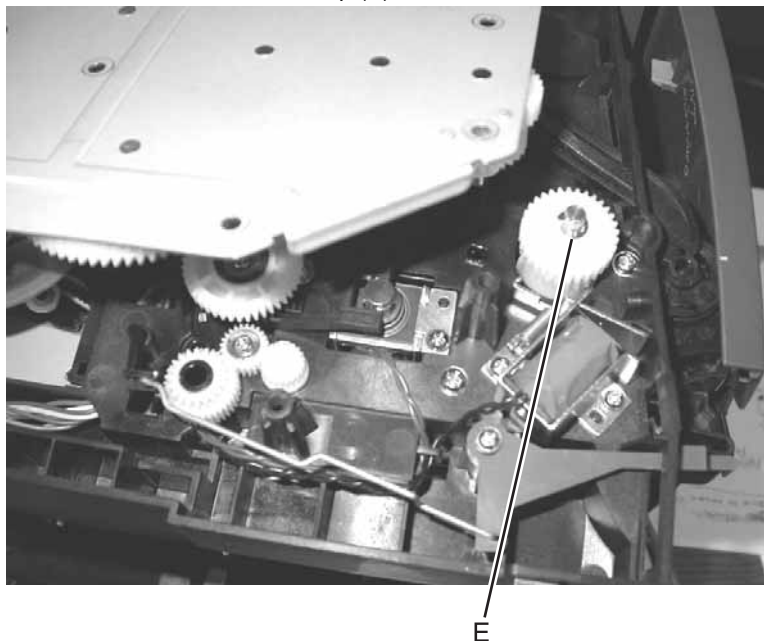

6. Remove the manual paper feed clutch.

## Manual feed solenoids

1. Remove the duplex unit. See **“Duplex removal” on page 4-18.**
2. Extract the solenoid cable to a point close to the left side as possible.
3. Remove the main motor drive. See **“Main motor drive removal” on page 4-28.**
4. Remove the auto comp clutch. See **“Auto comp clutch removal” on page 4-10.**
5. Remove the three screws (A).

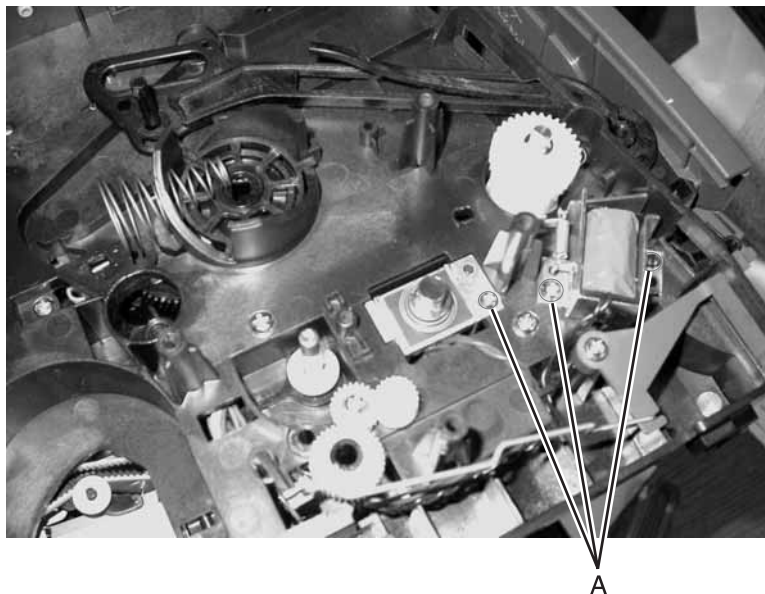


6. Remove the manual feed solenoids.

### Media level indicator removal


1. Remove the left side cover. See **“Left side cover removal”** on page 4-4.
2. Turn the printer onto its top. (Be careful to protect the covers.)
3. Unhook and remove the spring (A).



4. Unhook the link (B) from the indicator level.

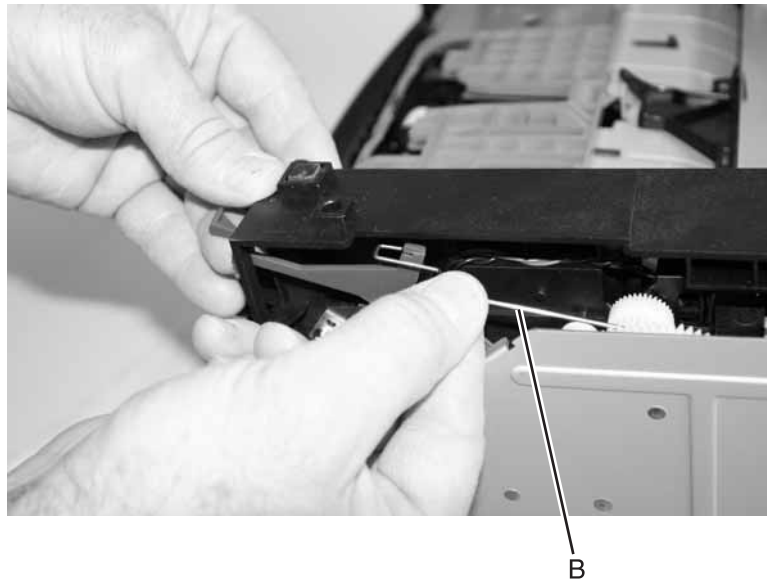


5. Rotate the link, and turn it to separate it from the plastic shaft (C). Be careful to not damage the adjacent gear.

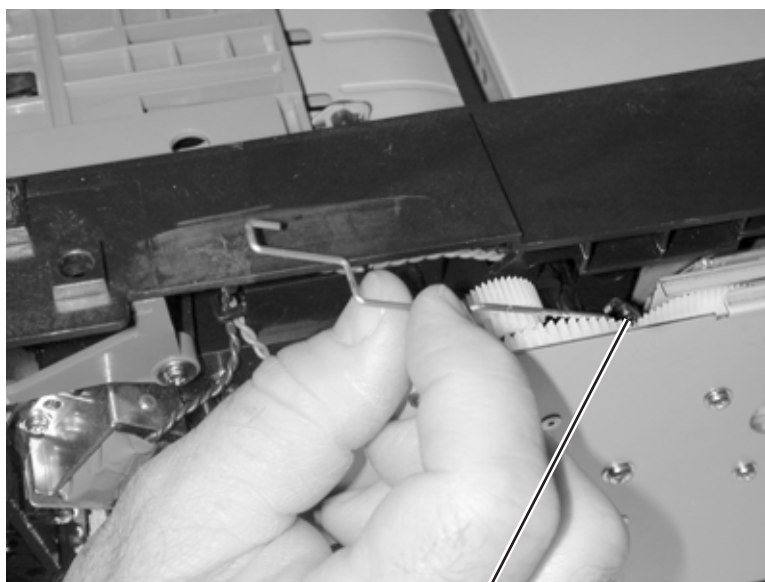

C

6. Unsnap the shaft from its pivot, which is attached to the back of the LVPS/HVPS shield (D).
7. Align the link end of the shaft with the opening in the side frame, and remove the shaft and spring anchor (E).

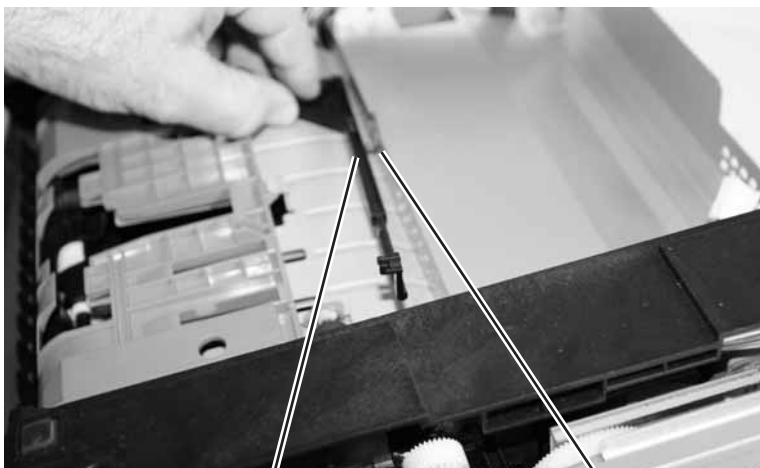


E

D

### Narrow media sensor removal

1. Remove the top cover. See **"Top cover removal"** on page 4-7.
2. Turn the top cover upside down.
3. Remove the ground strap screw (A) and the ground strap.

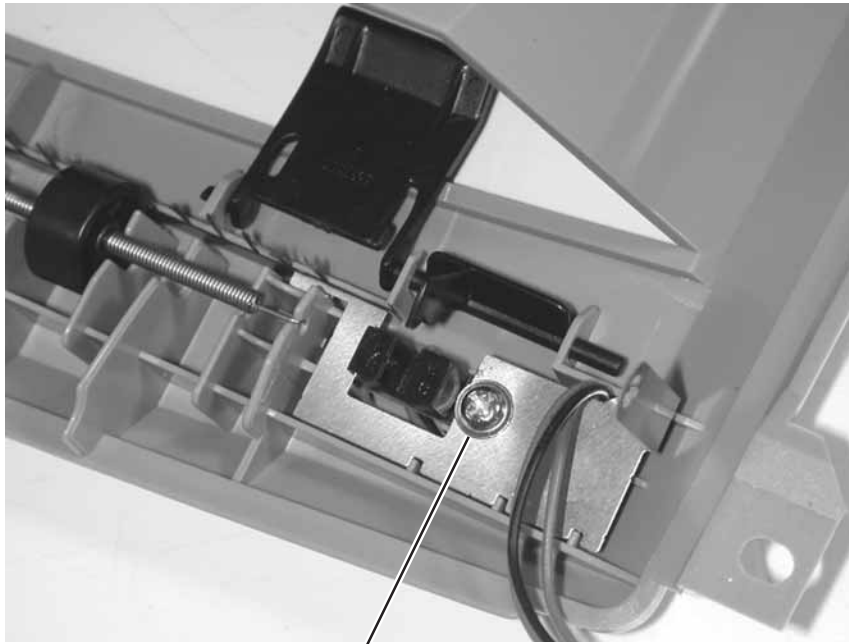


A


4. Remove the narrow media sensor.

## Operator panel removal

1. Open the front cover.
2. Remove the bezel. See **"Bezel removal"** on page 4-12.
3. Remove the screw (A).
4. Remove the face plate which surrounds the bezel by unlatching the four tabs (B).

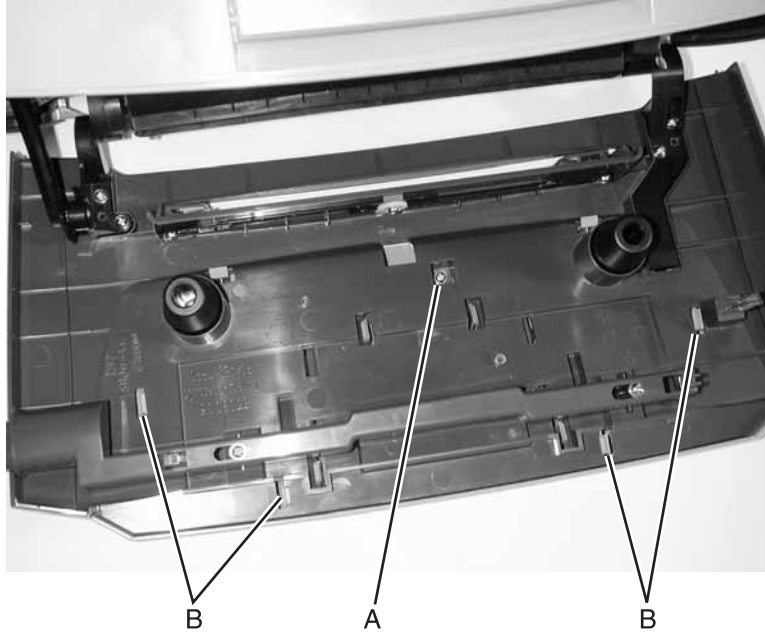

5. Close the front cover.
6. Disconnect the cable (C). (The LED operator panel connects the same as the LCD panel as shown.)

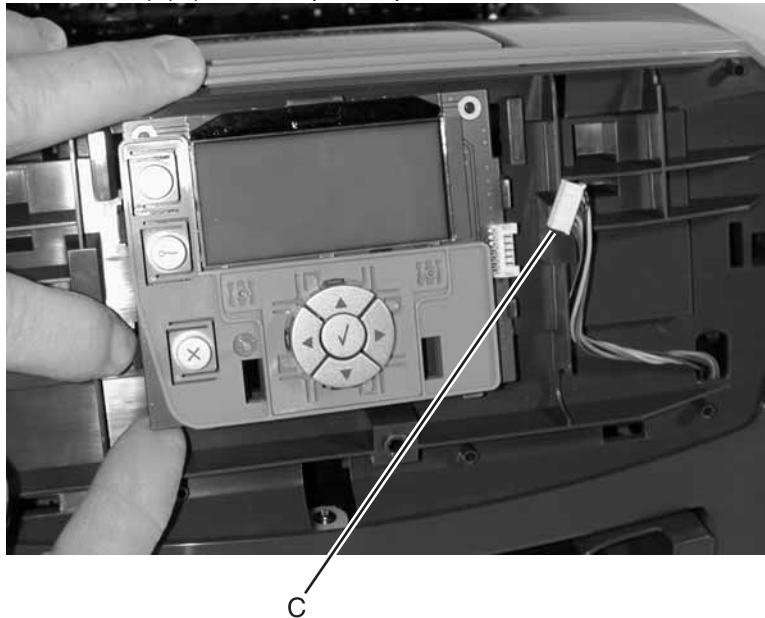


7. Unlatch the four latches on the panel cover.
8. Pull the bottom edge out until it slides in a downward motion out of its retainers.
9. Slide the card out from the latches on top.
10. Remove the operator panel.

**Warning:** Do not replace the operator panel and the controller card at the same time. Each card contains the printer settings. When either of these cards is new, it obtains its settings from the other card. Critical factory settings are lost when both are new and replaced at the same time.



### Paper exit guide assembly removal


1. Remove the rear cover. See **"Rear cover removal"** on page 4-6.
2. Remove the one screw above the reversing solenoid. See **"Top cover removal"** on page 4-7.
3. Remove the three screws (A).

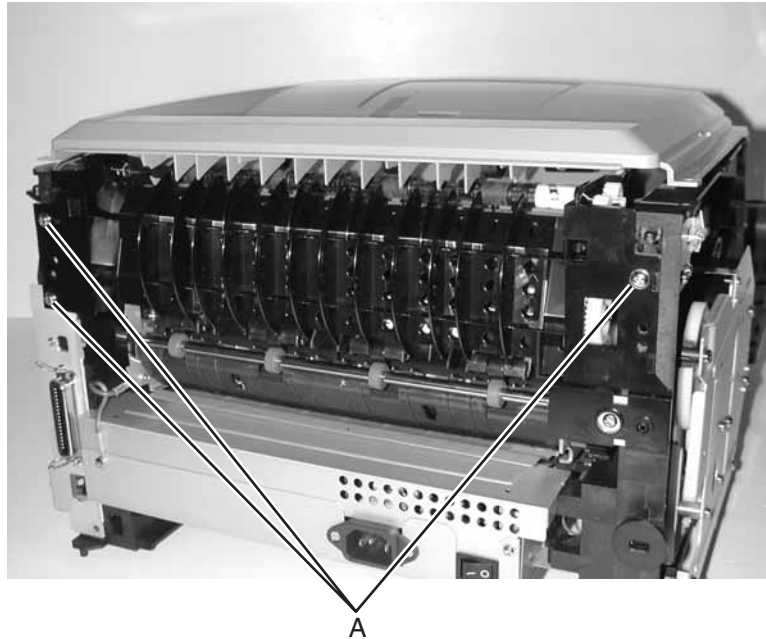

4. Lift the back of the top cover (right side in photo) to prevent the gears on the assembly from touching other items while removing, especially the fuser mounting bracket.
5. Remove the paper exit guide assembly.

### Paper feed rollers (autocompensator tires) removal


1. Remove Tray 1.
2. Open or lower the duplex door.
3. Lower the ACM.
4. Remove the rubber paper feed rollers.
5. Pinch the new rubber roller into a tight radius to determine the orientation of the tire relative to the hub.  
Notice the direction of the points on the edge. Those points should be directed in the paper feed direction as shown.

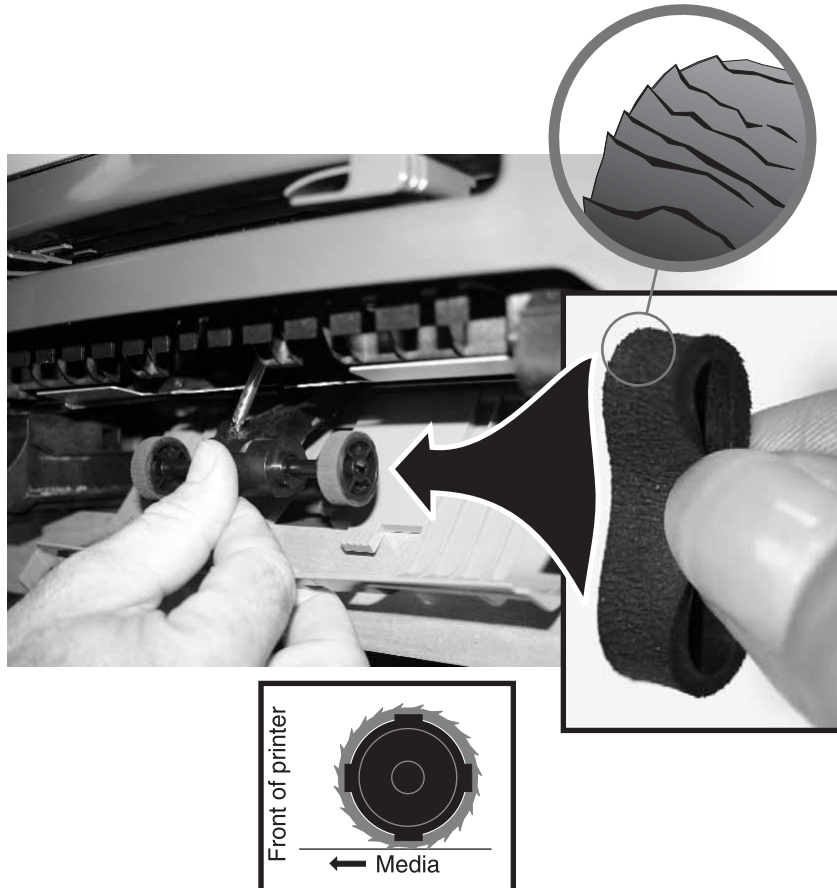

6. Make sure the new paper feed rollers are captured between the rims of the plastic hub.
7. If the orientation is questionable, run Print Quality sheets, and check for skew.

### Paper input and duplex sensor removal

1. Remove the duplex unit. See **"Duplex removal"** on page 4-18.
2. Remove screws (A) holding the two sensors.

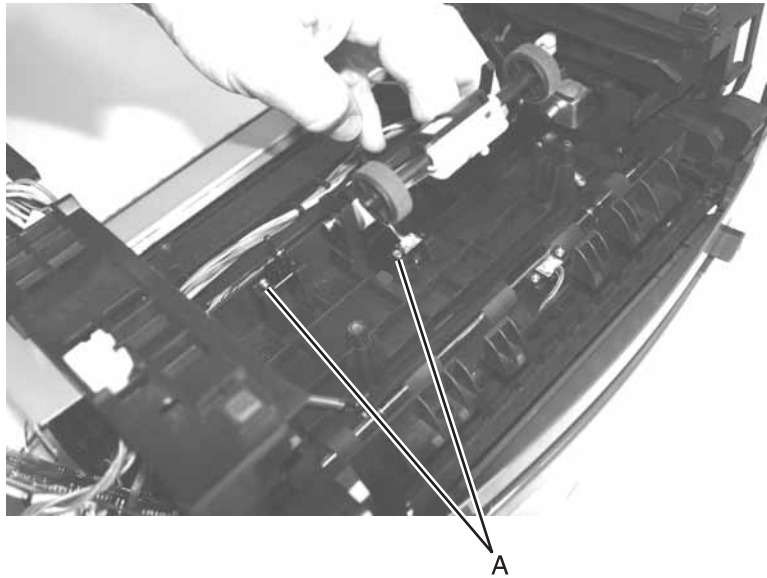


3. Remove the sensor assembly.

**Note:** Be sure to secure cables in retainers when installing the new assembly. The solenoid cable should be installed on top of the sensor cables.


## Printhead removal

1. Remove the top cover. See **"Top cover removal" on page 4-7** for more information.
2. Remove the right side cover. See **"Right side cover removal" on page 4-5.**
3. Remove the controller card cover.
4. Disconnect the cables J5 DRV (A), J8 LXX LSU (B), and J15 (C) from the controller card.

**Note:** Be sure to remove the toroid before disconnecting the cables.

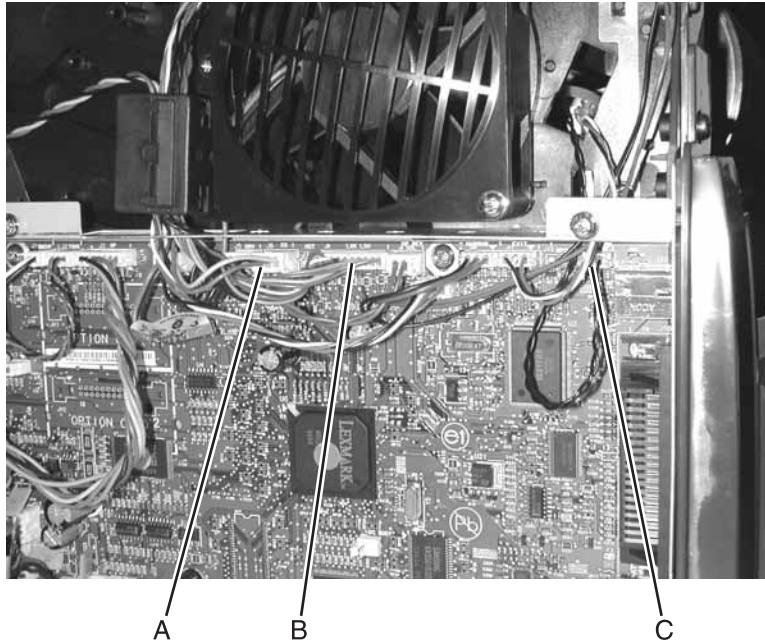

5. Remove three screws (D) securing the printhead.

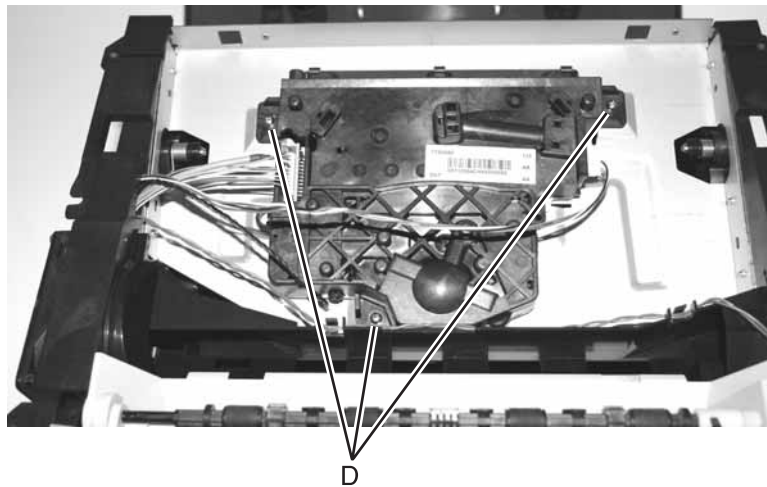


6. Remove the printhead.

### Reinstallation note:

- Install the new printhead by lining up the alignment knob with the indicator located at the front right-hand screw.
- Be sure to place the toroid back over the cables.
- Mechanically adjust the printhead, if necessary. See **"Printhead assembly mechanical adjustment" on page 4-13.**
- Electronically adjust the printhead. This is a necessary step. See **"Printhead assembly electronic adjustment" on page 4-8.**

## Reversing solenoid removal


1. Remove the top cover. See **"Top cover removal" on page 4-7.**
2. Remove the controller card shield. (Loosen the four screws, and slide.) See **"Right side cover removal" on page 4-5.**
3. Disconnect the cable from J9 (DP REV SOL) on the controller card.
4. Remove the two screws (A).

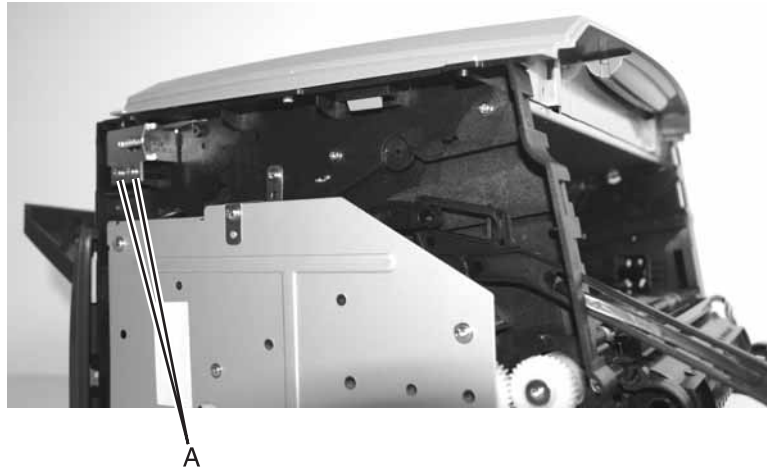

5. Remove the reversing solenoid.

## Toner level sensor removal


1. Remove Tray 1.
2. Open the front access cover.
3. Open the right side cover.
4. Unplug the toner level sensor cable.
5. Unsnap the toner level sensor (A) from the frame, and remove it through the inside of the printer.

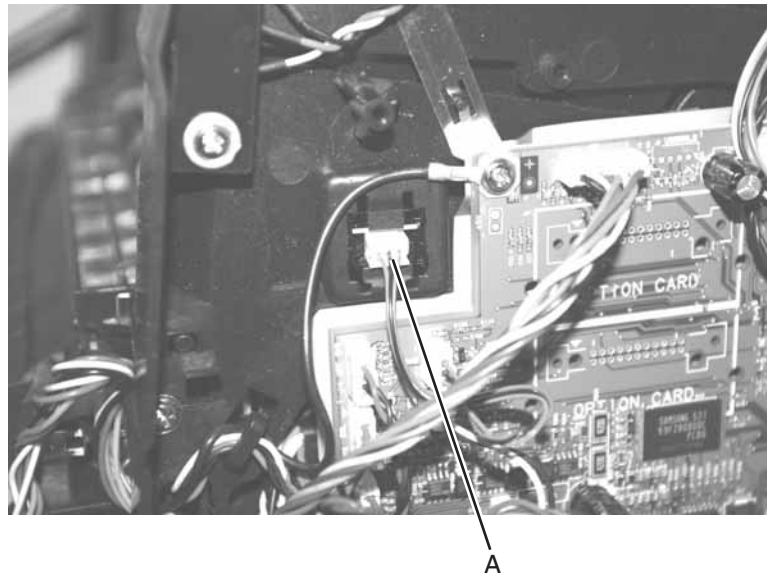

## Transfer roll removal

**Note:** A flashlight may be required to remove the transfer roll.

1. Open the front access cover.
2. Place a clean piece of paper around the transfer roll to protect it from finger oils.

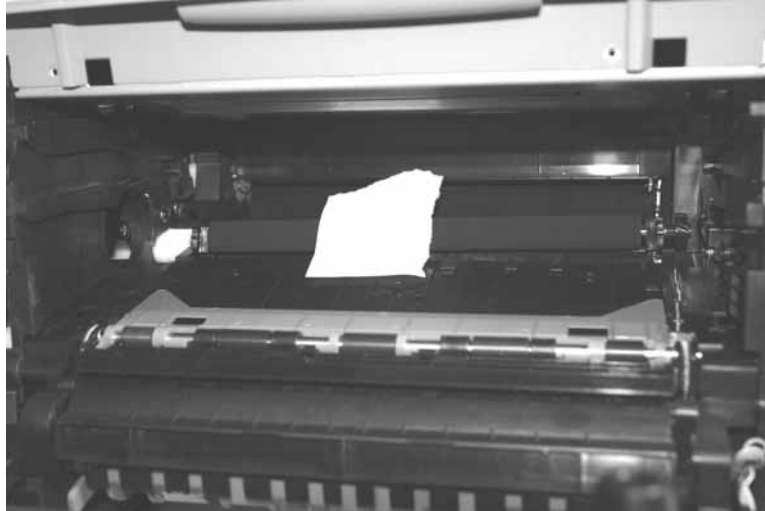

**Note:** *Do not* touch the transfer roll with bare hands. Contaminants can damage the roll.


3. At the right side of the transfer roll, squeeze the holder arms with the left hand while lifting. Stop when the holder is unlatched.
4. At the left side of the transfer roll, squeeze the holder arms with the right hand while lifting with the left hand. Stop when the left holder is unlatched.
5. With a hand at each end, lift the transfer roll out.

**Note:** Do not try removing the spring on the left; it is not removeable but can be dislodged. The spring included with the FRU is to be used only if the old right-side spring is damaged or lost. Both springs must be positioned on posts that cannot be seen. If the old springs are moved, feel the base of the springs to assure that they are on the posts. The top of the springs must be captured in the bearings of the transfer roll.

## Tray 2 auto comp tire removal

Gently pull the rubber tire loose from the wheel, and replace it with a new tire.


**Note:** Look at the nap of the tire, and orient the tire for highest friction when picking the paper.

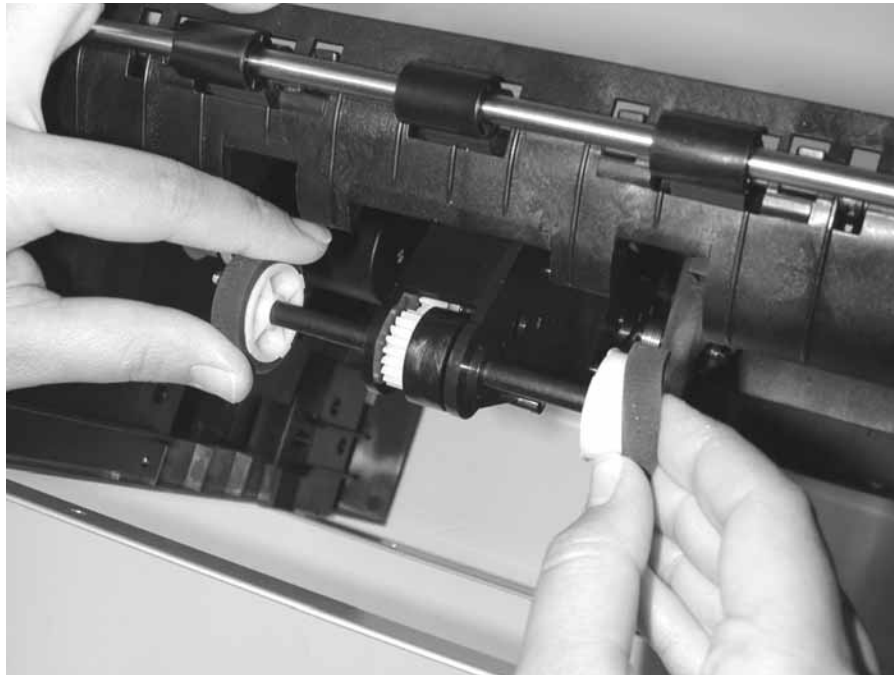





## Upper front frame group removal

1. Open the front cover.
2. Unhook the front end of the springs (A) on the right and left sides of the upper frame.

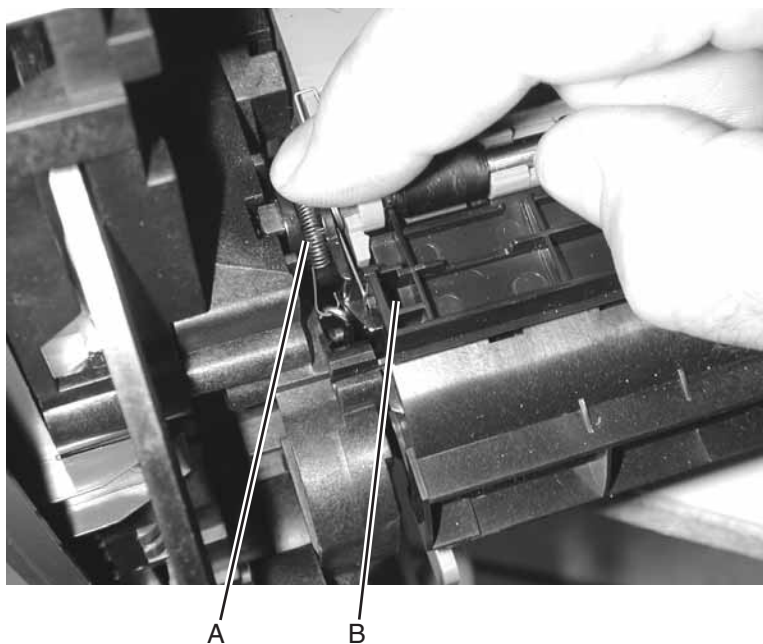

3. Insert the flat end of the spring hook through the front corner opening (B).
4. Push out on the latch by moving the top of the spring hook to the right and while lifting the corner.
5. Repeat for the right side, and remove the assembly.
6. Unlatch the left and right sides of the front cover guide (C) with a flat blade screwdriver or spring hook (D).
7. Lift the right side to align the flat on the guide shaft with the opening.
8. Slide the shaft through the opening.

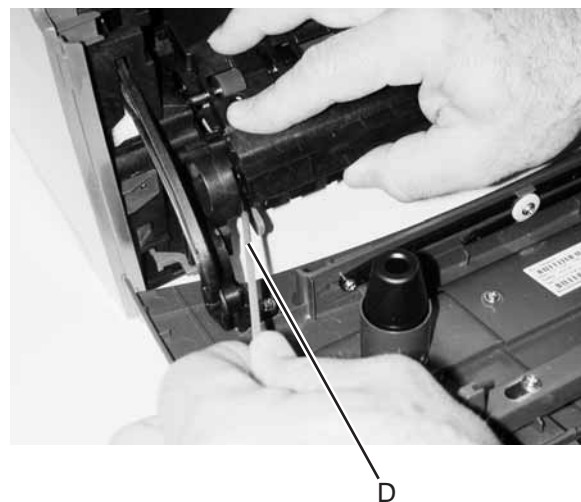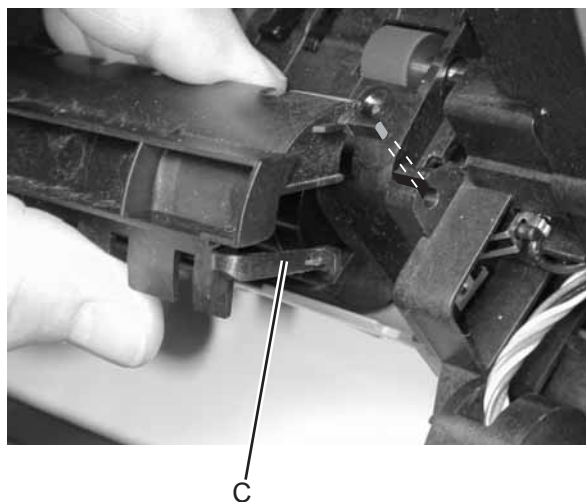

9. Slide the cover to the right to free the left side, and remove the front cover guide.



**Installation note:** Move the printer so the front hangs over the front edge of the work surface. Anchor the left spring on its rear post and maintain tension on it while snapping the assembly into position on the left side. Use the spring hook from below the printer to anchor the front of the spring.

Carefully position the unsnapped right side so the right spring can be anchored at the rear. While maintaining tension on the spring, snap the right side into position. Use the spring hook from below the printer to anchor the front of the spring.



### **Wear strip removal (tray 1)**


1. Hold the tray with the bottom up.
2. Use a spring hook to unfasten each of the anchors on the back of each strip.



3. Remove the strip from inside the tray.

### **Wear strip removal (tray 2)**

1. Pull up the strip with the spring hook to free it at the top.

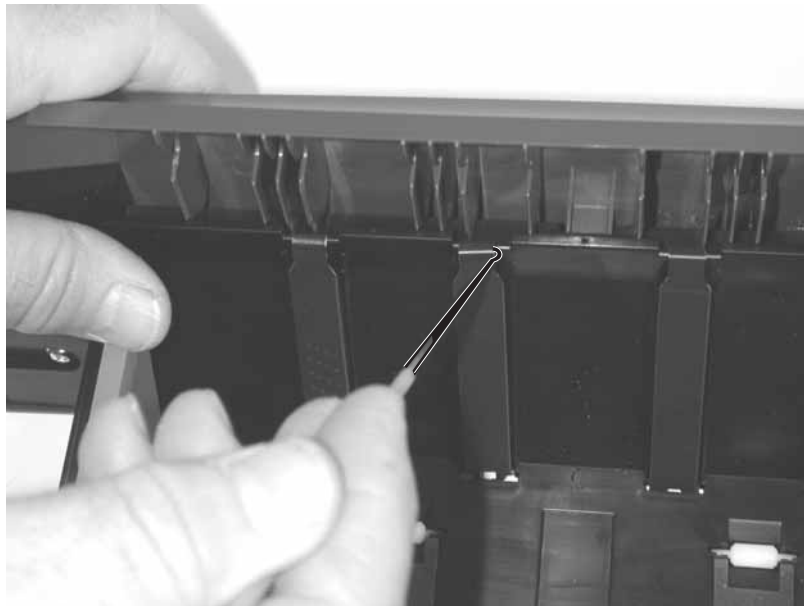

2. Lift the strip out.

**Note:** When replacing the strip:

- Push the strip up with your thumb to make sure that the strip is in place.



- Turn the tray over so that you are looking at the bottom of the strip. Using the spring hook, check to make sure that the end of the strip is secure and the strip is fastened tightly.







## 5. Locations and connections

### Locations

#### Front view

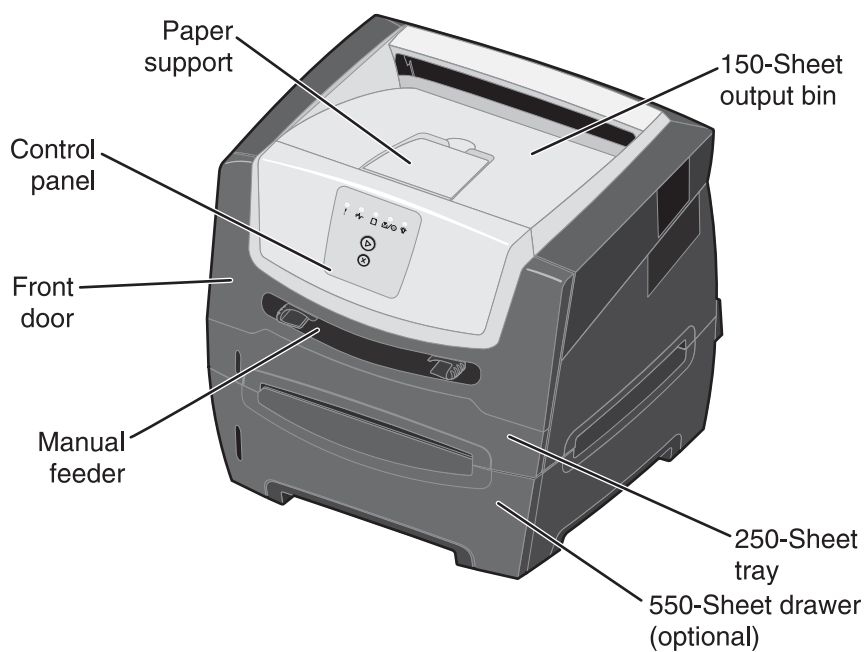

#### Rear view

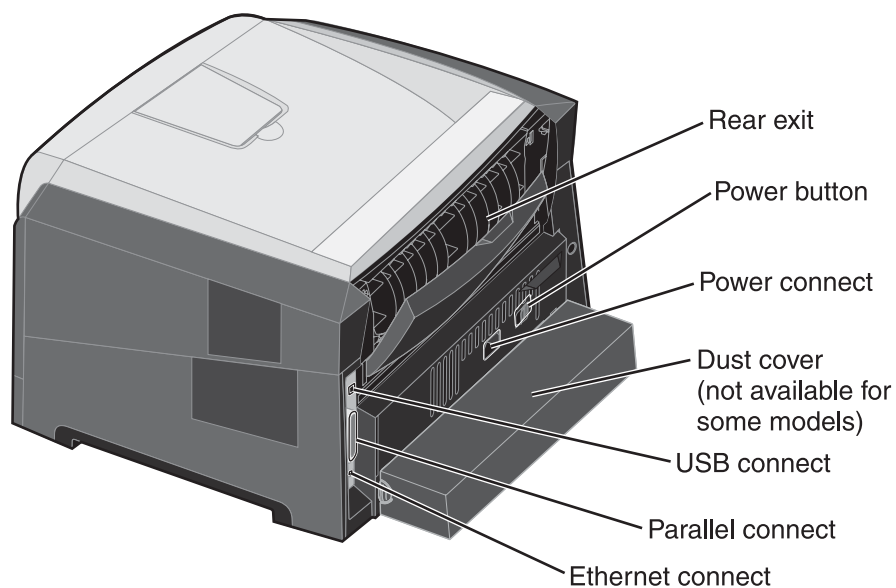

## Controller card connector pin values

**Note:** See the wiring diagram at back of book.

These values were measured with all connections made (plugged) or with only one connector at a time unplugged to expose the pins. Always disconnect and connect with the printer power off. Otherwise, the values below may not match.

Connector	Pin #	Value cableplugged	Value cable unplugged (if different)	Comments
J1	1	Signal		Smart chip
	2	Ground		
J2	1	Less than 5 V dc		Toner level sensor
	2	Ground		
	3	Signal		
J3	1, 3, 5	Signal		Operator panel
	2	5 V dc		
	4, 7	Ground		
	6	3.3 V dc		
J4	1	Ground		Cooling fan
	2	24 V dc		
J5	1, 3	Signal		LSU drive
	2	Ground		
J6	1, 2	5 V dc	Less than 1 V dc	Front cover open switch
				Cover closed
	3	Ground		
	1	0 V dc		Cover open
	2	5v		
	3	Ground		
J8	2, 4, 7	Ground		LSU
	10	5 V dc		
	1, 3, 5, 6, 8, 9	Signal		
J9	1, 2	24 V dc		Reversing solenoid
	2		Less than 1 V dc	
J10	1	Less than 5 V dc		Narrow media sensor
	2	5 V dc		
	3	Ground		
J11	1	Less than 5 V dc		Exit sensor
	2	5 V dc		
	3	Ground		
J13	1	5 V dc		Thermistor
	2	Ground		

Connector	Pin #	Value cable plugged	Value cable unplugged (if different)	Comments
J15	1	5 V dc		LSU (HSYNC)
	2, 3	Signal		
	4	Ground		
J17	1-4	Signal	3.2 V dc	Main motor
	5	Ground		
	6	5 V dc		
	7-9	24 V dc	Less than 24 V dc	
J19	1-6	Signal		LVPS/HVPS
	7	Ground		
	8, 9	24 V dc		
	10, 11, 15	Signal		
	12, 14	Ground		
	13	5 V dc		
J20	1	Less than 5 V dc	5 V dc	Manual feed sensor
	2	5 V dc	5 V dc	
	3	Ground		
J21	1-4	24 V dc		Manual feed solenoids
	1, 3		24 V dc	
	2, 4		0 V dc	
J22	1, 4, 5	Signal		Tray 2
	2, 3	24 V dc		
	6	Ground		
J25	1	Less than 5 V dc	5 V dc	Paper feed and duplex sensors
	2	5 V dc	5 V dc	
	4	Less than V dc	5 V dc	
	5	5 V dc	5 V dc	
	3, 6	Ground		

---

## Connectors

### System board

Connector	Pin no.	Signal
J1 USB Port	G1	Ground
	1	USB +5 V dc
	2	USB D-
	3	USB D+
	4	Ground
	G2	Ground



## 6. Preventive maintenance

This chapter describes procedures for printer preventive maintenance. Follow these recommendations to help prevent problems and maintain optimum performance.

---

### Safety inspection guide

The purpose of this inspection guide is to aid in identifying unsafe conditions.

If any unsafe conditions exist, find out how serious the hazard could be and if it is safe to continue before correcting the hazard.

Check the following items:

- Damaged, missing, or altered parts, especially in the area of the On/Off switch and the power supply
- Damaged, missing, or altered covers, especially in the area of the top cover and the power supply cover
- Possible safety exposure from any non-Lexmark attachments

---

### Lubrication specifications

FRUs are typically lubricated as needed from the factory. If not, lubricate only when parts are replaced or as needed, not on a scheduled basis. Use of lubricants other than those specified can cause premature failure. Some unauthorized lubricants may chemically attack parts. Use P/N 99A0394 (Nyogel 744) to lubricate appropriate areas. Lubricate gears that were lubricated in the original part.

---

### Maintenance kits

Maintenance kits include:

- Fuser (P/N 40X2800, 40X2801, or 40X2802)
- Exit guide (P/N 40X2834)
- Tray 1 ACM feed tires (P/N 56P1820)
- Transfer roll (P/N 40X2822)

#### Maintenance kits

Description	Part number
110 V maintenance kit	40X2847
220 V maintenance kit	40X2848
100 V maintenance kit	40X2849



## 7. Parts Catalog

### How to use this parts catalog


The following legend is used in the parts catalog:

Asm- Index	Part number	Units/mach	Units/ FRU	Description
------------	-------------	------------	------------	-------------

- **Asm-index:** identifies the assembly and the item in the diagram. For example 3-1 indicates assembly 3 and the item number 1.
- **Part number:** identifies the unique number that identifies this FRU.
- **Units/mach:** refers to the number of units actually used in the machine or product.
- **Units/FRU:** refers to the number of units packaged together and identified by the part number.
- **NS:** (Not shown) in the Asm-Index column indicates that the part is procurable but is not pictured in the illustration.
- **PP:** (Parts Packet) in the parts description column indicates the part is contained in a parts packet.
- Model information used in the parts catalog.

Machine type and model	Description
4512-220	Lexmark E250d
4512-230	Lexmark E250dn


## Assembly 1: Covers

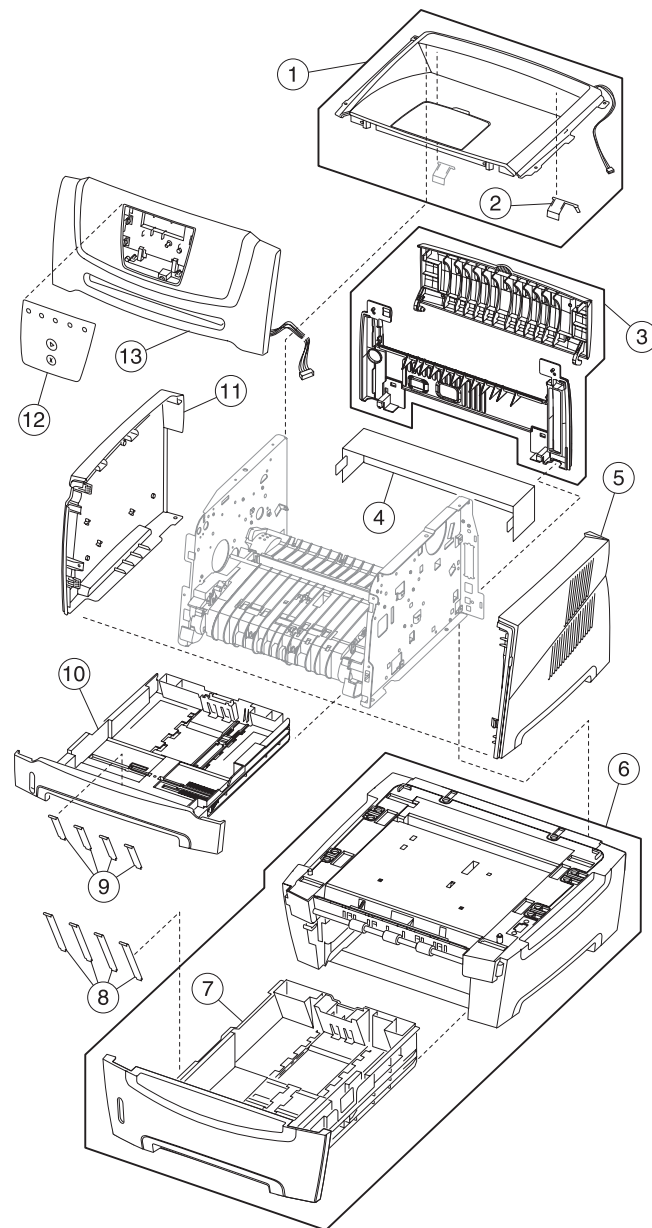

## Assembly 1: Covers

Asm-Index	Part number	Units/mach	Units/FRU	Description
1—1	40X2835	1	1	Top cover assembly (includes narrow media sensor)
2	40X2812	1	1	Top cover right flag
3	40X2839	1	1	Rear upper and lower cover assembly
4	40X2858	1	1	Legal extender dust cover
5	40X2837	1	1	Right side cover
6	40X2843	1	1	Optional media drawer assembly
7	40X2844	1	1	Tray 2 assembly
8	40X2855	1	4	Tray 2 wear strips
9	40X2854	1	4	Tray 1 wear strips
10	40X2842	1	1	Main tray
11	40X2836	1	1	Left side cover
12	40X2852	1	1	LED bezel cover, E250d
12	40X2814	1	1	LED bezel cover, E250dn
13	40X2840	1	1	Front access cover assembly


## Assembly 2: Electronics

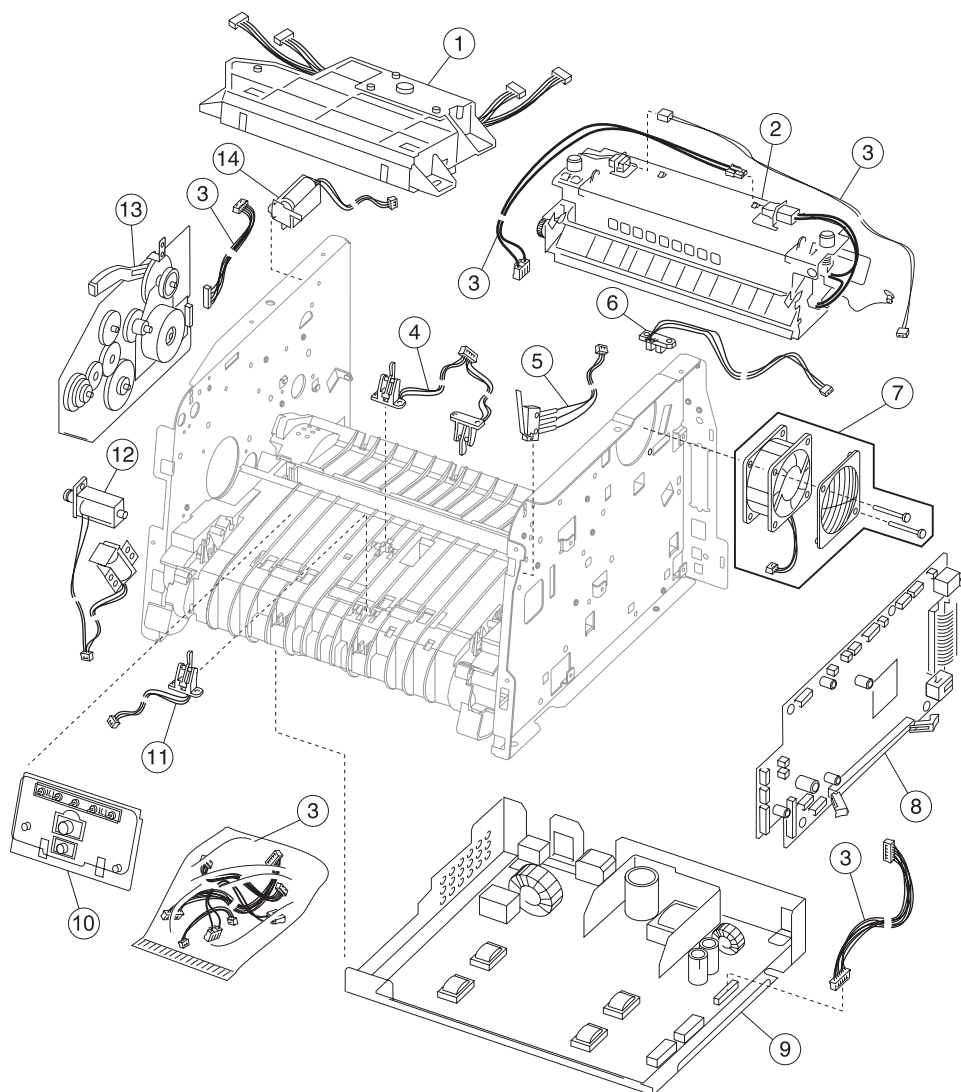

## Assembly 2: Electronics

Asm-Index	Part number	Units/mach	Units/FRU	Description
2-1	40X2804	1		LSU, E250d/E250dn (printhead)
2	40X2800	1		Fuser assembly, 110 V
2	40X2801	1		Fuser assembly, 220 V
2	40X2802	1		Fuser assembly, 100 V
3	40X2833	1		Miscellaneous cable assemblies
			1	Thermistor
			1	LVPS/HVPS to controller card
			1	Main drive gear assembly (motor to controller card)
			1	Fuser power (LVPS to fuser)
4	40X2823	1	1	Duplex and media sensor assembly
5	40X2813	1	1	Cover open sensor assembly
6	40X2856	1	1	Narrow media sensor
7	40X2828	1	1	Cooling fan
8	40X2805	1	1	Controller card, E250dn
8	40X2851	1	1	Controller card, E250d
9	40X2819	1		LVPS/HVPS card assembly, 110 V
9	40X2820	1		LVPS/HVPS card assembly, 220 V
10	40X2809	1		LED operator panel assembly, E250d/E250dn
11	40X2824	1	1	Manual input sensor assembly
12	40X2845	1	1	Pickup and manual feed solenoids
13	40X2826	1	1	Main drive gear assembly
14	40X2846	1	1	Reversing solenoid

## Assembly 3: Frame

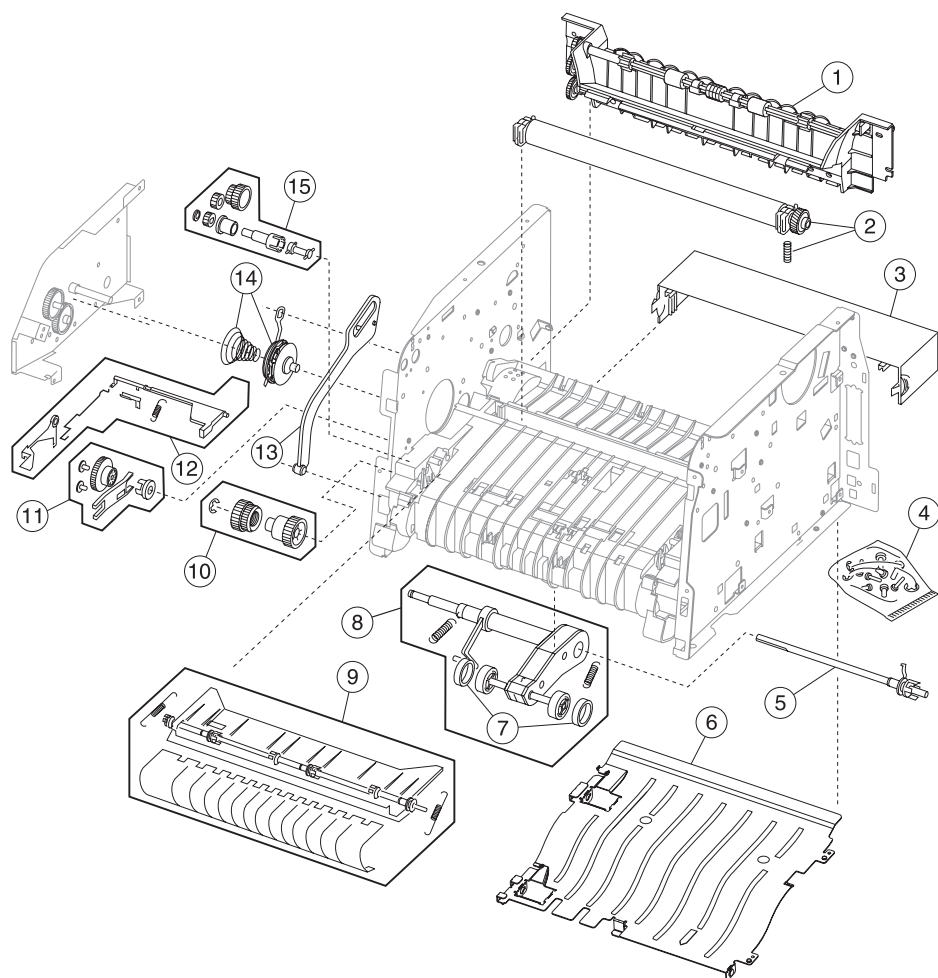



### Assembly 3: Frame

Asm-Index	Part number	Units/mach	Units/FRU	Description
3-1	40X2834	1		Media exit guide assembly
2	40X2822	1		Transfer roll, bearings, gear, spring (CBM)
3	40X2858	1	1	Legal extender dust cover
4	40X2850	N/A		Screws, miscellaneous
			4	TP2NCX3X6PF-Ni
			4	TP2C-4.0+8PF-Ni
			4	M3.0*0.5+6PF-Ni
			2	M3.0*0.5+4PF-Ni
			2	M3.5*0.6+6P-Ni
5	40X2853	1	1	ACM drive shaft assembly
6	40X2841	1	1	Complete duplex assembly
7	56P1820	2		Paper feed, ACM tires (RO)
8	40X2838	1	1	Media (ACM) drive assembly
9	40X2857	1	1	Upper front frame assembly
10	40X2830	1	1	Manual feed clutch CBM
11	40X2831	1	1	Media feed ACM clutch CBM
12	40X2832	1	1	Media level indicator CBM
13	40X2825	1	1	Developer drive/access door link
14	40X2829	1	1	Developer drive coupling assembly
15	40X2821	1	1	Duplex drive gear CBM
NS	40X2847	1	1	110 V maintenance kit
NS	40X2848	1	1	220 V maintenance kit
NS	40X2849	1	1	100 V maintenance kit
				<b>Note:</b> Kit contains the following: Fuser (40X2800, 40X2801, or 40X2802) Exit guide (40X2834) Tray 1 ACM feed tires (56P1820) Transfer roll CBM (40X2822)
NS	7377298	1		Field location package assembly
NS	40X2817	1	2	Tray 2 paper feed tires

## Assembly 4: Options

Asm-Index	Part number	Units/mach	Units/FRU	Description
NS	40X1364	1		32MB SDR DIMM
NS	40X1365	1		64MB SDR DIMM
NS	40X1367	1		Parallel cable, packaged (3 m)
NS	40X1368	1		USB cable, packaged (2 m)
NS	40X1513	1		Simplified Chinese font card assembly
NS	40X1514	1		Traditional Chinese font card assembly
NS	40X1512	1		Japanese font card assembly
NS	40X1515	1		Korean font card assembly

## Assembly 5: Power cords

Asm-Index	Part number	Units/mach	Units/FRU	Description
NS	40X0289	1		Power cord, 1.8M (straight)—USA, Canada
NS	40X0278	1		Power cord, 6 foot (straight)—Europe and others
NS	40X0288	1		Power cord, 8 foot (straight)—Argentina
NS	40X0271	1		Power cord, 8 foot (straight)—United Kingdom
NS	40X0275	1		Power cord, 6 foot (straight)—Israel
NS	40X0274	1		Power cord, 6 foot (straight)—Switzerland
NS	40X0276	1		Power cord, 6 foot (straight)—South Africa
NS	40X0287	1		Power cord, 6 foot (straight)—Traditional Italy
NS	40X0279	1		Power cord, 6 foot (straight)—Denmark
NS	40X0277	1		Power cord, 6 foot (straight)—Brazil
NS	40X0282	1		Power cord, 1.8M (straight)—PRC
NS	40X0270	1		Power cord, 2.5M (straight)—Japan
NS	40X0280	1		Power cord, 1.8M (straight)—Korea
NS	40X0281	1		Power cord, 1.8M (straight)—Taiwan
NS	40X0296	1		Power cord, 1.8M (straight)—Australia



# Index

## A

abbreviations **1-9**  
 acronyms **1-9**  
 Auto CR After LF **3-5**  
 Auto LF After CR **3-5**  
 autocompensator tires **4-38**

## C

cables  
   fuser power cable **4-24**  
 compatibility **1-5**  
 configuration ID **3-8**  
 configuration menu—  
   accessing **3-1**  
   navigating menu **3-1**  
 Network  
   Mac Binary PS **3-7**  
   NPA Mode **3-7**  
   Set Card Speed **3-7**  
 Parallel  
   MAC Binary PS **3-5**  
   NPA Mode **3-5**  
   Parallel Mode 2 **3-5**  
   Protocol **3-5**  
 printing menu **3-2**  
 Setup  
   Auto CR After LF **3-5**  
   Auto LF After CR **3-5**  
   Demo Mode **3-5**  
 table of light patterns **3-2**  
 USB  
   Mac Binary PS **3-6**  
   NPA Mode **3-6**  
 Utilities  
   Hex Trace **3-4**  
   Print Quality Pages **3-4**  
   Reset Factory Defaults **3-4**  
   Reset Photoconductor Counter **3-4**  
 controller card  
   removal **4-13**  
   service check **2-39**

## D

Defaults **3-8**  
 Demo Mode **3-5**  
 diagnostic information **2-1**  
 diagnostics mode—  
   Development  
     Configuration ID **3-8**  
     Defaults **3-8**  
     Edge to Edge **3-8**  
     Print History **3-8**  
   entering **3-1**  
   printout sample **3-3**

## E

Edge to Edge **3-8**  
 error messages  
   primary light patterns **2-2**  
   service error codes **2-23**  
   user attendance messages **2-2**  
 ESD-sensitive parts **4-1**

## F

fan  
   parts catalog **7-5**  
   removal **4-21**  
   service check **2-40**  
 frame, parts catalog **7-6**  
 fuser  
   parts catalog **7-5**  
   removal **4-22**  
   service check **2-41**

## H

handling ESD-sensitive parts **4-1**  
 Hex Trace **2-36, 3-4**

## L

LCD operator panel **4-36**  
 light patterns—  
   description **2-2**  
   primary **2-3**  
   service codes **2-23**  
 locations  
   front views **5-1**  
   rear views **5-1**  
 lubrication specifications **6-1**  
 LVPS/HVPS  
   parts catalog **7-5**  
   removal **4-26**  
   service check **2-42**

## M

maintenance approach **1-1**  
 maintenance kits **6-1**  
 manual feed  
   print media types and sizes **1-6**  
 menus  
   accessing service menus **3-1**  
   configuration menu **3-2**  
   diagnostics mode **3-3**  
   printing **3-1**  
 messages  
   service error codes **2-23**  
   user attendance messages **2-3**

## models

- comparison [1-1](#)
- diagrams [5-1](#)
- operator panels [1-2](#)
- service menus [3-1](#)
- trays available [1-4](#)

**N**NPA Mode [3-5](#)**O**

## operator panel

- LED—
  - overview [1-2](#)
  - service check [2-43](#)

**P**paper exit guide, removal [4-37](#)

## paper jams

- tips on preventing [1-7](#)

parallel port service check [2-45](#)

## parts catalog

- covers [7-2](#)
- electronics [7-4](#)
- frame [7-6](#)
- options [7-8](#)

power-on self test (POST) [2-2](#)

- symptoms [2-37](#)

print history [3-8](#)

## print media

- preventing jams [1-7](#)
- trays by model [1-4](#)
- types and sizes [1-6](#)

print quality pages [3-4](#)

- using [2-46](#)

## print quality problems

- print media [1-7](#)
- service check [2-46](#)
- solving [2-50](#)

printer symptom table [2-38](#)

## printhead

- removal [4-40](#)
- service check [2-53](#)

Protocol [3-5](#)**R**

## removals

- controller card [4-13](#)
- cover open sensor [4-15](#)
- covers
  - front access cover [4-2](#)
  - left side cover [4-4](#)
  - right side cover [4-5](#)
  - top cover [4-7](#)
- developer drive coupling assembly [4-16](#)
- fan [4-21](#)
- fuser [4-22](#)
- fuser power cable [4-24](#)
- LVPS/HVPS card assembly [4-26](#)
- paper exit guide assembly [4-37](#)

paper feed rollers [4-38](#)printhead [4-40](#)procedures [4-1](#)toner level sensor— [4-41](#)transfer roll [4-42](#)Reset Factory Defaults [3-4](#)reset maintenance page counter [3-4](#)Reset PC Counter [3-4](#)**S**safety information [xi](#)safety inspection guide [6-1](#)

## sensors

- cover open [4-15](#)

service checks [2-39](#)controller card [2-39](#)cooling fan [2-40](#)cover interlock switch [2-40](#)dead machine [2-41](#)fuser [2-41](#)LVPS/HVPS [2-42](#)main motor [2-42](#)operator panel [2-43](#)paper feed [2-43](#)paper jam during POST [2-43](#)paper never picks [2-44](#)paper picks but stops [2-44](#)paper picks during POST [2-43](#)paper picks sheets [2-44](#)paper trees, curls [2-45](#)parallel port [2-45](#)print quality [2-46](#)black page [2-47](#)blank page [2-46](#)heavy background [2-47](#)image density [2-48](#)light print [2-49](#)partial blank image [2-48](#)poor fusing of image [2-48](#)toner on back of page [2-49](#)white or black lines [2-49](#)printhead [2-53](#)transfer roll [2-53](#)

## service error codes

- accessing [2-23](#)

tertiary light patterns [2-25](#)service menus [3-1](#)special tools [1-8](#)

## specifications

- connectivity [1-5](#)

input trays [1-4](#)memory [1-3](#)operating systems [1-5](#)photoconductor capacity [1-4](#)print media [1-6](#)print speed [1-3](#)toner capacity [1-4](#)

start **2-1**  
symptom tables **2-37**  
    POST **2-37**  
    printer **2-38**

## **T**

test pages  
    Print Quality Pages **3-4**  
tires, removal **4-38**  
tools **1-8**  
transfer roll  
    parts catalog **7-7**  
    removal **4-42**  
    service check **2-53**

## **U**

user attendance messages **2-3**






## Part number index

P/N	Description	Page
40X0270	Power cord, 1.77M (straight)—Japan	7-9
40X0271	Power cord, 6 foot—United Kingdom	7-9
40X0274	Power cord, 6 foot—Switzerland	7-9
40X0275	Power cord, 6 foot (straight)—Israel	7-9
40X0276	Power cord, 6 foot—South Africa	7-9
40X0277	Power cord, 6 foot (straight)—Brazil	7-9
40X0278	Power cord, 6 foot (straight)—Europe and others	7-9
40X0279	Power cord, 6 foot (straight)—Denmark	7-9
40X0280	Power cord, 1.77M (straight)—Korea	7-9
40X0281	Power cord, 1.77M (straight)—Taiwan	7-9
40X0282	Power cord, 1.77M (straight)—PRC	7-9
40X0287	Power cord, 6 foot (straight)—Traditional Italy	7-9
40X0288	Power cord, 6 foot—Argentina	7-9
40X0289	Power cord, 1.77M (straight)—USA, Canada	7-9
40X0296	Power cord, 1.8M (straight)—Australia	7-9
40X1300	Fuser assembly, 110 V	7-5
40X1323	Duplex and media sensor assembly	7-5
40X1328	Cooling fan	7-5
40X1333	Cable assembly, misc - fuser power	7-5
40X1333	Cable assembly, misc - main drive motor	7-5
40X1333	Cable assembly, misc.- LVPS/HVPS to controller	7-5
40X1333	Cable assembly, misc.- toner sensor	7-5
40X1364	32MB SDR DIMM	7-8
40X1365	64MB SDR DIMM	7-8
40X1367	Parallel cable, packaged (3 m)	7-8
40X1368	USB cable, packaged (2 m)	7-8
40X1512	Japanese font card assembly	7-8
40X1513	Simplified Chinese font card assembly	7-8
40X1514	Traditional Chinese font card assembly	7-8
40X1515	Korean font card assembly	7-8
40X2801	Fuser assembly, 220 V	7-5
40X2802	Fuser assembly, 100 V	7-5
40X2804	LSU, E250d/E250dn (printhead)	7-5
40X2805	Controller card, E250dn	7-5
40X2809	LED operator panel assembly, E250d/E250dn	7-5
40X2812	Top cover right flag	7-3
40X2813	Cover open sensor assembly	7-5
40X2814	LED bezel cover, E250dn	7-3
40X2817	Tray 2 paper feed tires	7-7
40X2819	LVPS/HVPS card assembly, 110 V	7-5
40X2820	LVPS/HVPS card assembly, 220 V	7-5
40X2821	Duplex drive gear CBM	7-7
40X2822	Transfer roll, bearings, gear, spring (CBM)	7-7
40X2824	Manual input sensor assembly	7-5
40X2825	Developer drive/access door link	7-7
40X2826	Main drive gear assembly	7-5
40X2829	Developer drive coupling assembly	7-7
40X2830	Manual feed clutch CBM	7-7
40X2831	Media feed ACM clutch CBM	7-7
40X2832	Media level indicator CBM	7-7
40X2833	Miscellaneous cable assemblies	7-5
40X2834	Media exit guide assembly	7-7
40X2835	Top cover assembly	7-3
40X2836	Left side cover	7-3

40X2837	Right side cover	7-3
40X2838	Media (ACM) drive assembly	7-7
40X2839	Rear upper and lower cover assembly	7-3
40X2840	Front access cover assembly	7-3
40X2841	Complete duplex assembly	7-7
40X2842	Main tray	7-3
40X2843	Optional media drawer assembly	7-3
40X2844	Tray 2 assembly	7-3
40X2845	Pickup and manual feed solenoids	7-5
40X2846	Reversing solenoid	7-5
40X2847	110 V maintenance kit	6-1, 7-7
40X2848	220 V maintenance kit	6-1, 7-7
40X2849	100 V maintenance kit	6-1, 7-7
40X2850	Screws, miscellaneous	7-7
40X2851	Controller card, E250d	7-5
40X2852	LED bezel cover, E250d	7-3
40X2853	ACM drive shaft assembly	7-7
40X2854	Tray 1 wear strips	7-3
40X2855	Tray 2 wear strips	7-3
40X2856	Narrow media sensor	7-5
40X2857	Upper front frame assembly	7-7
40X2858	Legal extender dust cover	7-3, 7-7
56P1820	Paper feed, ACM tires (RO)	7-7
7377298	Field location package assembly	7-7

# E250d/E250dn

## Wiring Diagram

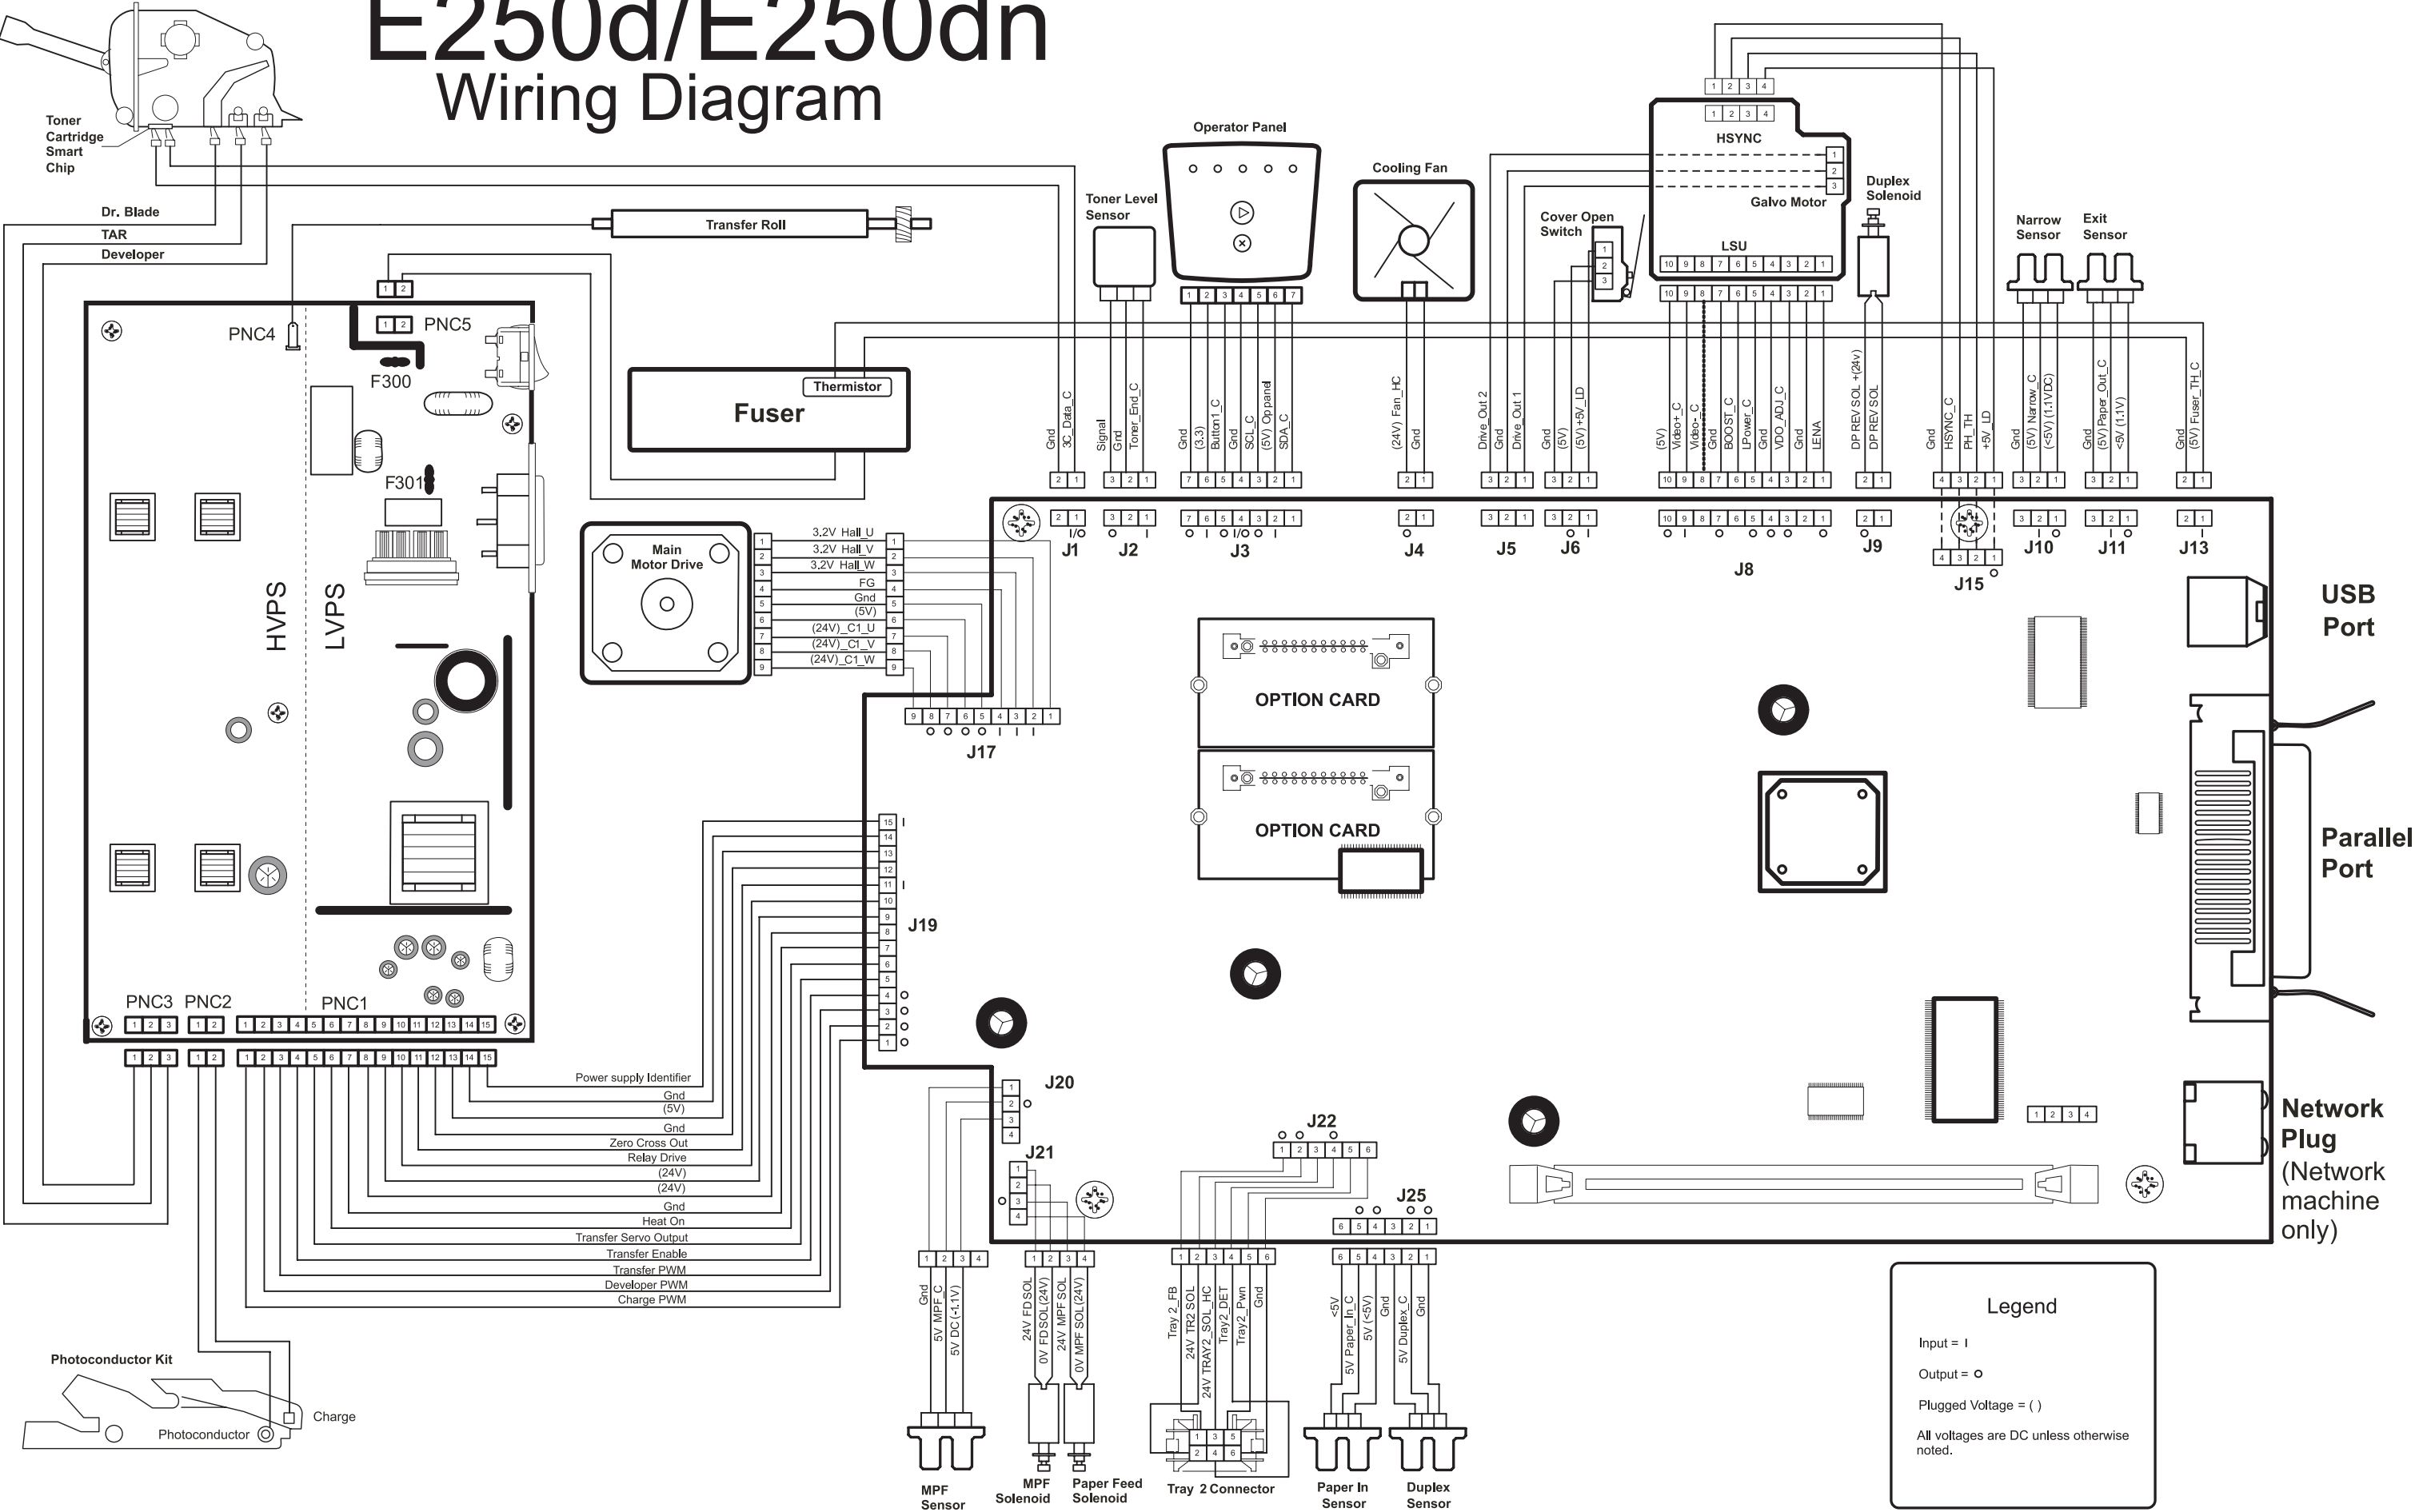

Defects often repeat down a page. In such cases, matching the defect frequency to one of the sets of vertical lines below can help identify the particular part that may be causing the defect.

