# HP LaserJet Enterprise M506 series



Get a faster startup<sup>1</sup> and help protect against threats with multi-level device security.<sup>6</sup>

Finish key tasks faster with a printer that starts right away and helps conserve energy.<sup>1</sup> Multi-level device security helps protect from threats.<sup>6</sup> Original HP Toner cartridges with JetIntelligence and this printer produce more high-quality pages.<sup>2</sup>



**HP LaserJet Enterprise M506n** 



**HP LaserJet Enterprise M506dn** 



**HP LaserJet Enterprise M506x** 

#### Accelerate your work and use less energy

- Don't wait for documents. Print your first page in as few as 8.5 seconds from energy-efficient sleep mode.
- This printer leads its class in low energy use—thanks to its innovative design and toner technology.<sup>4</sup>
- Speed through jobs on a variety of media. Print two-sided documents almost as quickly as one.
- Now almost 30% smaller—this printer fits in tight places and delivers quiet operation.<sup>3</sup>

#### Unparalleled fleet security and management

- Embedded features detect security threats and heal your printer, protecting it from boot up to shutdown.<sup>6</sup>
- Protect sensitive data stored on the printer and in transit, using embedded and optional security features.<sup>6</sup>
- Protect sensitive business data with embedded and optional HP JetAdvantage Security Solutions.<sup>8</sup>
- Centralize control of your print environment with HP Web Jetadmin<sup>7</sup>—and help build business efficiency.

## More pages, performance, and protection

- Produce sharp text, bold blacks, and crisp graphics with precision black toner.
- Get more. Original HP Toner with JetIntelligence delivers more pages per cartridge than predecessors.<sup>2</sup>
- Help ensure the Original HP quality you paid for with anti-fraud and cartridge authentication technology.
- Print right away with a preinstalled toner cartridge. Replace it with an optional high-yield cartridge.<sup>5</sup>


#### Stay connected with secure mobile printing options

- Enable 128-bit encrypted wireless direct printing from mobile devices—without accessing the network.<sup>10</sup>
- Print with just a touch of your NFC-enabled mobile device to this printer—no network
- Easily access, print, and share resources with Ethernet and optional wireless networking.9
- Protect your investment with HP Care Pack. Let our HP certified engineers resolve all your technical issues.<sup>12</sup>


<sup>&</sup>lt;sup>1</sup> Based on HP internal testing of top three leading competitors' first page out from sleep mode and duplex print speed completed 8/2015. Subject to device settings. Actual results may vary. For details, see hp.com/go/Liclaims <sup>2</sup> More pages versus predecessor cartridges claim based on page-yield comparison of HP 55X High Yield Black Original Laser Jet Toner Cartridges. For more information, see hp.com/go/learnaboutsupplies <sup>3</sup> Compared with the HP Laser Jet Enterprise P3015. <sup>4</sup> Based on HP testing using the ENERGY STAR® programs' Typical Electricity Consumption (TEC) method or as reported in energystar.gov versus the top three leading competitors as of 8/2015. Actual results may vary. For details see hp.com/go/Liclaims <sup>5</sup> HP 87X High Yield Black Original Laser Jet Toner Cartridges not included; please purchase separately. <sup>5</sup> Some features require additional purchase. Learn more at hp.com/go/printsecurity. A FutureSmart service pack update may be required to activate security features? <sup>7</sup> HP Web Jetadmin is free and available for download at hp.com/go/webjetadmin <sup>8</sup> Some solutions require download or additional purchase. Learn more at hp.com/go/printingsolutions <sup>9</sup> Wireless networking requires purchase of the HP Jetdirect 2900nw Print Server. Wireless performance is dependent on physical environment and distance from access point, and may be limited during active VPN connections. <sup>10</sup> Wireless direct printing is standard on the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506n/dn. Mobile device needs to be connected directly to the Wife network of a wireless direct-capable MFP or printer prior to printing. Depending on mobile device, an app or driver may also be required. For details, see hp.com/go/businessmobileprinting <sup>11</sup> Touch-to-print capability is standard on the HP Laser Jet Enterprise M506n/dn. Mobile device must support Near Field Communication (NFC) enabled printing. For more information, see

## **Product walkaround**

- 1 Intuitive 4.3-inch (10.9 cm) colour VGA control panel tilts up for easier viewing
- 2 Home button (returns to home screen)
- 3 250-sheet output bin
- 4 Easy-access USB port to print files directly
- 5 Top cover access to Original HP Toner cartridge with JetIntelligence
- 6 100-sheet multipurpose tray
- 7 Two 550-sheet input trays for a 1,200-sheet total input capacity
- 8 Hardware Integration Pocket (HIP) for solution integration<sup>2</sup>
- 9 Built-in wireless direct<sup>3</sup>/NFC touch-to-print<sup>4</sup>
- 10 Convenient front on/off switch
- 11 Built-in automatic two-sided printing
- 12 Rear door (access to the print path)
- 13 512 MB standard memory (upgradeable to 1.5 GB) and a 1.2 GHz processor
- 14 Access port for optional Kensington-style lock
- 15 HP Jetdirect Gigabit/Fast Ethernet embedded print server
- 16 Hi-Speed USB 2.0 port (for connecting third-party devices)
- 17 Hi-Speed USB 2.0 printing port

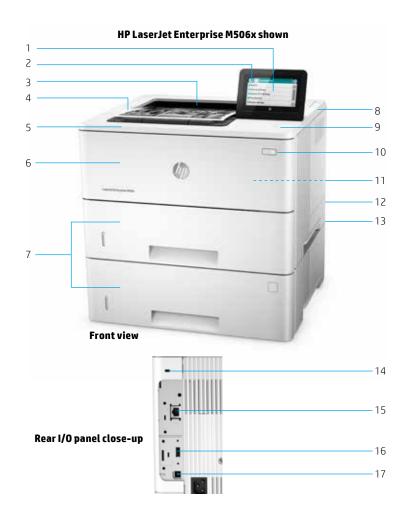

# Series at a glance

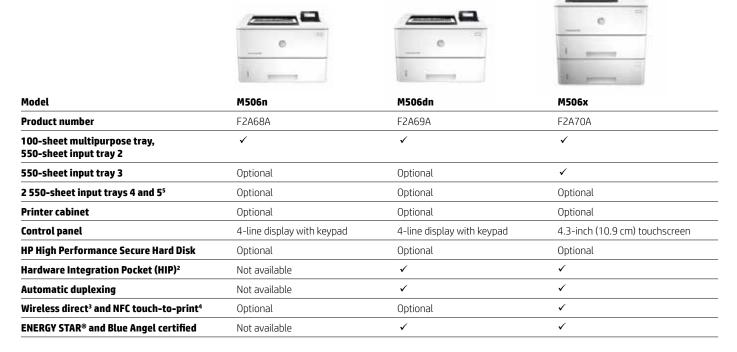

¹ An administrator must enable the easy-access USB port before use. ² The Hardware Integration Pocket is only available for the HP Laser Jet Enterprise M506dn and M505x models. Enabling the HIP requires purchase of optional HP Internal USB Ports for M506/M527 accessory (F2A87A). Solutions deployed through the Hardware Integration Pocket may require additional purchase. ³ Wireless direct printing is standard on the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x holy. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x

### **HP Services**

Downtime can have serious consequences, so HP provides support beyond the standard warranty. You benefit from reduced risk, maximized uptime, predictable service delivery and no unbudgeted repair costs. Choose from:

Optimized Care (optimum performance and stability): 4 hour Onsite Support, Maintenance Kit Replacement Service, Installation with Network Configuration Service

#### Standard Care (high level of uptime): Next

Business Day Onsite Support, Maintenance Kit Replacement Service, Installation with Network Configuration Service

**Basic Care (minimum recommended support):** Next Business Day Onsite Support

**4 hr Onsite Support:** Onsite support within four hours after a service call received within the coverage window

**Next Business Day Onsite Support:** Onsite service the next business day after the service call is received

#### **Maintenance Kit Replacement Service:**

Onsite replacement of your printer's maintenance kit including parts, materials, and labor

#### **Installation with Network Configuration**

**Service:** Assembly, network configuration, and basic administrator familiarization

For more information about HP Care Pack, HP Contractual, or HP Managed Print Services, visit hp.com/qo/printservices



















# **Top Features**

Work quickly with the fastest first page out from sleep mode—on the most energy-efficient printer in its class. <sup>1,4</sup> Launch two-sided printing right from the touchscreen. Reload paper less often with a substantial 2,300-sheet maximum capacity.<sup>3</sup>

Trust your printer is secure from power-up to power-down. Get strong protection for devices, data, and documents with embedded and optional security features while centrally managing your entire printer fleet.<sup>7</sup>

Bring out the best in your printer. Print more high-quality pages than ever before,<sup>2</sup> using specially designed Original HP Toner cartridges with JetIntelligence. Count on the authentic HP quality you paid for—something the competition can't match.

Enable secure wireless printing in the office—with or without network access<sup>5</sup>—and keep users connected with Ethernet and optional wireless networking. Print with just a touch from mobile devices.<sup>6</sup>

Product	
F2A68A	HP LaserJet Enterprise M506n
F2A69A	HP LaserJet Enterprise M506dn
F2A70A	HP LaserJet Enterprise M506x

#### Accessories

Accessories	
F2A72A	HP LaserJet 550-sheet Paper Tray
F2A73A	HP LaserJet Printer Cabinet
G6W84A	1 GB DDR3 SlimDIMM
B5L29A	HP Secure High Performance Hard Disk Drive
F5S62A	HP Trusted Platform Module Accessory
B5L28A	HP Internal USB Ports
F2A87A	HP Internal USB Ports for M506 and M527
J8031A	HP Jetdirect 2900nw Print Server

#### Supplies & Maintenance Kits®

CF287A	HP 87A Black Original LaserJet Toner Cartridge (~9,000 pages)
CF287X	HP 87X Black Original Laser let Toner Cartridge (~18.000 pages)

HP Jetdirect 3000w NFC/Wireless Accessory

#### **HP Care Packs**

18030A

U8PK3E	HP 3-year Next Business Day + DMR LaserJet M506 Hardware Support
U8PK4E	HP 4-year Next Business Day + DMR LaserJet M506 Hardware Support
U8PK5E	HP 5-year Next Business Day + DMR LaserJet M506 Hardware Support
	THE RESERVE OF THE PROPERTY OF

U8PL9PE HP 1-year Post Warranty Next Business Day + DMR LaserJet M506 Hardware Support U8PM0PE HP 2-year Post Warranty Next Business Day + DMR LaserJet M506 Hardware Support

Protect your investment with HP Care Pack. Let HP certified engineers resolve your technical issues. For more details on HP Care Pack, go to hp.com/go/cpc

#### Pane

Contact HP via phone: Asia: 65 6253 8500

#### Solutions

HP Web Jetadmin: hp.com/go/wja

HP Universal Print Driver: hp.com/go/upd

HP Imaging and Printing Security Center: hp.com/go/ipsc

HP LaserJet Fonts, Barcodes, and IPDS Emulation available at hp.com/go/laserjetfonts

To learn more about available infrastructure, management, and workflow solutions, visit hp.com/go/gsc

Based on HP internal testing of top three leading competitors' first page out from sleep mode and duplex print speed completed 8/2015. Subject to device settings. Actual results may vary. For details, see <a href="https://px.com/go/Ljclaims">https://px.com/go/Ljclaims</a>
A more pages versus predecessor cartridges claim based on page-yield comparison of HP 55X High Yield Black Original Laser Jet Toner Cartridges with HP B7X High Yield Black Original Laser Jet Toner Cartridges. For more information, see <a href="https://px.com/go/learnaboutsupplies">px.com/go/learnaboutsupplies</a> Purchase of optional paper trays required to reach maximum input capacity. \*Based on HP testing using the ENRGY STAR\* program's Typical Electricity Consumption (TEC) method or as reported in <a href="https://px.com/go/Ljclaims">px.com/go/Ljclaims</a> \*Wireless direct printing is standard on the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase of optional HP Jetdirect 3000w NFC/Wireless Direct Accessory for the HP Laser Jet Enterprise M506x only. Requires purchase o

# **HP LaserJet Enterprise M506 series**

Technical specifications	HP LaserJet Enterprise M506n (F2A68A)	HP LaserJet Enterprise M506dn (F2A69A)	HP LaserJet Enterprise M506x (F2A70A)			
Functions		Print only				
Print						
Duplex print options	Manual (driver support provided)		: (standard)			
Print speed <sup>1</sup>	Black (normal, A4): Up to 43 ppm; Black (normal, letter): Up to 45 ppm; Black (Landscape, A5): Up to 65 ppm; Black (Duplex, A4): Up to 34 ipm; Black (Duplex, letter): Up to 36 ipm					
First page out <sup>2</sup>	<b>Black (A4, ready):</b> As fast as 6.0 sec; As fast as 11.5 sec (100 V); <b>Black (A4, sleep):</b> As fast as 8.1 sec; As fast as 13.7 sec (100 V)					
Print technology	PlI-(I	Laser	* <b>\</b> H- I- 1700   1700   1-			
Print resolution	Black (Dest): Up to 1200 x	1200 dpi; <b>Black (normal):</b> Up to 600 x 600 dpi; <b>Black (fine l</b>	ines): Up to 1200 x 1200 api			
Print resolution technologies		300 dpi, 600 dpi, HP FastRes 1200, HP ProRes 1200 2 (black)				
Print cartridges number Standard print languages	חט טכו פ חט טכו ב (חט טכו ב ק		lation pative DDE printing (v. 1.7)			
Printer management	HP PCL 5 (HP PCL 5 (HP PCL 5 driver available from the Web only), HP postscript level 3 emulation, native PDF printing (v 1.7)  Printer Management; Printer Administrator Resource Kit (Driver Configuration Utility, Driver Deployment Utility, Managed Printing Administrator); HP Web JetAdmin Software; HP Proxy Agent Software; HP JetAdvantage Security Manager					
Connectivity						
Standard connectivity	Hi-Speed USB 2.0 port; built-in Fast Ethernet 10Base-T/100Base-Tx, Gigabit Ethernet 1000Base-T					
Mobile printing capability <sup>3</sup>	HP ePrint; Apple AirPi	rint™; Mopria-certified	HP ePrint; Apple AirPrint™; Mopria-certified; Wireless direct printing; NFC touch-to-print			
Network ready		Standard (built-in Gigabit Ethernet)				
Network capabilities		IPv4/IPv6: Apple Bonjour Compatible (Mac OS v10.2.4 or higher), SNMPv1/v2c/v3, HTTP, HTTPS, FTP, TFTP, Port 9100, LPD, WS Discovery, IPP, Secure-IPP, XMPP, IPsec/Firewall; IPv DHCPv6, MLDv1, ICMPv6; IPv4: Auto-IP, SLP, Telnet, IGMPv2, B00TP/DHCP, WINS, IP Direct Mode, WS Print				
Wireless capability	Optional, enabled with pu	ırchase of HW accessories	Yes, NFC/Wireless			
Memory		Standard: 512 MB; Maximum: 1.5 GB				
Duty cycle <sup>4</sup>	Up to 150,0	00 pages; Recommended monthly page volume: 5 2,000 to	/,5UU pages			
Processor speed		1.2 GHz				
Paper handling	100 choot multipurpose Travel 550 sheet inc. 11 - 3	100 choot multipurpose Travel 550 choot includes 3	100 shoot multipurpose Terri 1 FFO shoot in 1 Terri			
Input <sup>6</sup>	100-sheet multipurpose Tray 1, 550-sheet input tray 2; <b>Optional:</b> Up to 3 550-sheet paper feeders	100-sheet multipurpose Tray 1, 550-sheet input Tray 2, automatic duplex printing;	100-sheet multipurpose Tray 1, 550-sheet input Trays 2 and 3, automatic duplex printing;			
Output		Optional: Up to 3 550-sheet paper feeders	Optional: Up to 2 550-sheet paper feeders			
Output	250-sheet output bin					
Media type  Media weight	Paper (bond, colour, letterhead, plain, preprinted, prepunched, recycled, rough); envelopes; labels; cardstock; transparencies; user-defined  Tray 1: 60 to 199 q/m²; Tray 2+: 60 to 120 q/m²					
Media sizes custom	<b>Tray 1:</b> 60 to 199 g/m²; <b>Tray 2+:</b> 60 to 120 g/m² <b>Tray 1:</b> 76 x 127 to 216 x 356 mm; 550-sheet input; <b>Tray 2:</b> 105 x 148 to 216 x 356 mm; <b>Optional 550-sheet input Tray 3+:</b> 105 x 148 to 216 x 356 mm					
Dimensions (W x D x H)	418 x 376 x 298 mm (16.46 x 14.80 x 11.73 in)	418 x 376 x 298 mm (16.46 x 14.80 x 11.73 in)	418 x 376 x 481 mm (16.46 x 14.80 x 18.94 in)			
Weight	11.6 kg (25.5 lb)	11.8 kg (25.9 lb)	15.8 kg (34.9 lb)			
What's in the box <sup>7</sup>	HP LaserJet M506n Printer; Introductory HP Black LaserJet Toner Cartridge (~6,000 pages); CDs containing software and electronic documentation; Warranty Guides;	HP LaserJet M506dn Printer; Introductory HP Black LaserJet Toner Cartridge (~6,000 pages); CDs containing software and electronic documentation; Warranty Guides;	HP LaserJet M506x Printer; Introductory HP Black LaserJet Toner Cartridge (~6,000 pages); CDs containir software and electronic documentation; Warranty Guid			
Warranty features	HIGS; Erratas	HIGS; Erratas One-year, return to bench warranty	HIGS; Erratas; 550-sheet Paper Tray			
Systems		One-year, return to bench warranty				
Compatible operating systems	Windows OS compatible with In-Box Driver: Windows XP SP3 all 32-bit editions (XP Home, XP Pro, etc), Windows Vista all 32-bit editions (Home Basic, Premium, Professional, etc), Windows 7 all 32- & 64-bit editions, Windows 8/8.1 all 32- & 64-bit editions (excluding RT OS for Tablets), Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); Windows OS compatible with Universal Print Driver (From HP.com): Windows XP SP3 32- & 64-bit editions (XP Home, XP Pro, etc), Windows Vista all 32- & 64-bit editions (Home Basic, Premium, Professional, etc), Windows 7 all 32- & 64-bit editions, Windows 8/8.1 all 32- & 64-bit editions (excluding RT OS for Tablets), Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets), Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets), Windows 8/8.1 all 32- & 64-bit editions (excluding RT OS for Tablets), Windows 8/8.1 (10 RT), ST (ST (ST (ST (ST (ST (ST (ST (ST (ST					
Minimum system requirements	PC: Windows XP SP3 all 32-bit editions (XP Home, XP Pro, etc), Windows Vista all 32-bit editions (Home Basic, Premium, Professional, etc), Windows 7 all 32- & 64-bit editions, Windows 8/8.1 all 32- & 64-bit editions (excluding RT OS for Tablets), Windows 10 all 32- & 64-bit editions (excluding RT OS for Tablets); CD-ROM or DVD drive, or Internet connection; Dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; OS compatible hardware (For OS hardware requirements see microsoft.com); Mac: Mac OS X 10.8 Mountain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; Internet; USB; 1 GB available hard disk; OS compatible hardware (For OS hardware requirements see apple.com)					
Fonts and typefaces	105 internal TrueType fonts scalable in HP PCL, 92 internal scalable fonts in HP postscript Level 3 emulation (Euro symbol built-in); 1 internal Unicode Fonts (Andale Mono World Type); 2 Internal Windows Vista 8 Fonts (Calibri, Cambria); additional font solutions available via third-party flash memory cards; HP LaserJet Fonts and IPDS Emulation available at hp.com/go/laserjetfonts					
Power	Power supply type: Internal (Built-in) power supply; Power supply required: Input voltage: 100 to 127 VAC, 60 Hz; Input voltage: 200 to 240 VAC, 50 Hz (Not dual voltage, power supply varies by part number with #option code identifier); Power consumption: 741.98 watts (Active Printing), 13.72 watts (Ready), 2.51 watts (Sleep), 0.08 watts (Auto-Off), 0.08 watts (Off); Typical electricity consumption number: 1.824 kWh/Week (Blue Angel); 1.886 kWh/Week (Energy Star)					
Software included	For Windows OS: HP Software Installer/Uninstaller, HP PCL 6 Printer Driver, HP Device Experience (DXP), HP Update, Product Registration Assist, HP Web Services Assist (HP Connected), Online user manuals; For Mac OS: Welcome Screen (Directs users to HP.com or OS App Source for LaserJet Software)					
Acoustic	Acoustic power emissions: 6.8 B(A); Acoustic power emissions (ready): 4.0 B(A); Acoustic pressure emissions bystander (active, printing): 54 dB(A);  Acoustic pressure emissions bystander (ready): 24 dB(A)					
Environmental ranges	Operating temperature range: 15 to 32.5° C (59 to 90.5° F); Recommended operating temperature: 17.5 to 25° C (63.5 to 77° F); Non-operating humidity range: 10 to 80% RH; Recommended operating humidity range: 30 to 70% RH					
Security management	Management security: SNMPv3, SSL/TLS, WPA2-Enterprise, 802.1X authentication (EAP-PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Certificate, Pre-Shared Key Authentication, and Kerberos Authentication; Support for WJA-10 IPsec Configuration using IPsec Plug-in					
Safety approvals and requirements	IEC 60950-1:2005 +A1:2009 +A2:2013 (International); EN60950-1:2006 +A11:2009 +A1:2010 +A12:2011 +A2:2013 (EU); EN 60825-1:2007/IEC 60825-1:2007 (Class 1 Laser Product); EN 62479:2010/IEC 62479:2010; Low Voltage Directive 2006/95/EC with CE Mark (Europe); GS Certificate (Germany, Europe); UL/cUL Listed and UC CoC (US/Canada); CAN/CSA C22.2 No. 60950-1-07 2nd Ed. 2011-12; Compliance with Laser safety standards 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser notice No. 50, Dated June 24, 2007; Other safety approvals as required by individual countries					
Supported network protocols	IPv4/IPv6: Apple Bonjour Compatible (Mac OS 10.2.4 or higher), SNMPv1/v2c/v3, HTTP, HTTPS, FTP, TFTP, Port 9100, LPD, WS Discovery, IPP, Secure-IPP, IPsec/Firewall; IPv6: DHCPv6, MLDv1, ICMPv6; IPv4: Auto-IP, SLP, Telnet, IGMPv2, BOOTP/DHCP, WINS, IP Direct Mode, WS Print; Other: NetWare NDS, Bindery, NDPS, ePrint; Google Cloud Print 2.0					
1 Massured using ISO/IEC 24724, eve	ludes first set of test documents. For more information see ho	com/go/printerclaims Evact speed varies depending on the s	vetom configuration, coftware application, driver and			

<sup>1</sup> Measured using ISO/IEC 24734, excludes first set of test documents. For more information see <a href="hp.com/go/printerclaims">hp.com/go/printerclaims</a>. Exact speed varies depending on the system configuration, software application, driver, and document complexity. <sup>2</sup> Wireless operations are compatible with 2.4 GHz operations only. App or software and HP ePrint account registration may also be required. Some features require purchase of an optional accessory. Learn more at <a href="hp.com/go/mobile-printing">hp.com/go/mobile-printing</a>. Mobile device needs to be connected directly to the Wi-F- inetwork of a wireless direct-capable MFP or printer prior to printing. Depending on mobile device, an app or driver may also be required. Learn more at <a href="hp.com/go/businessmobileprinting">hp.com/go/businessmobileprinting</a>. Requires a compatible NFC-printing-enabled mobile device. For a list of compatible NFC-printing-enabled mobile device, an app or driver may also be required. Learn more at <a href="hp.com/go/fo/businessmobileprinting">hp.com/go/fo/businessmobileprinting</a>. Requires a compatible NFC-printing-enabled mobile device. For a list of compatible NFC-printing-enabled mobile device see <a href="hp.com/go/fo/printing">hp.com/go/fo/printing</a>. Ph.com/go/fo/printing</a>. <sup>4</sup> Duty cycle is defined as the maximum number of pages per month of imaged output. This value provides a comparison of product robustness in relation to other HP Laser let or HP Color Laser let devices, and enables appropriate deployment of printers and MFPs to satisfy the demands of connected individuals or groups. <sup>5</sup> HP recommends that the number of pages per month of imaged output be within the stated range for optimum device performance, based on factors including supplies replacement intervals and device life over an extended warranty period. <sup>6</sup> Paper handling accessories are offered separately and with an additional cost. <sup>7</sup> Declared yield value in accordance with ISO/IEC 19752. Actual yields vary considerably bas

#### To learn more, visit hp.com

© Copyright 2016 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or original program.

ENERGY STAR and the ENERGY STAR logo are registered U.S. marks. Microsoft and Windows are registered trademarks of Microsoft Corporation. AirPrint and the AirPrint logo are trademarks of Apple Inc., registered in the U.S. and other countries. Linux is a U.S. registered trademark of Linus Torvalds. UNIX is a registered trademark of The Open Group. NetWare® is a trademark of Novell, Inc.

